


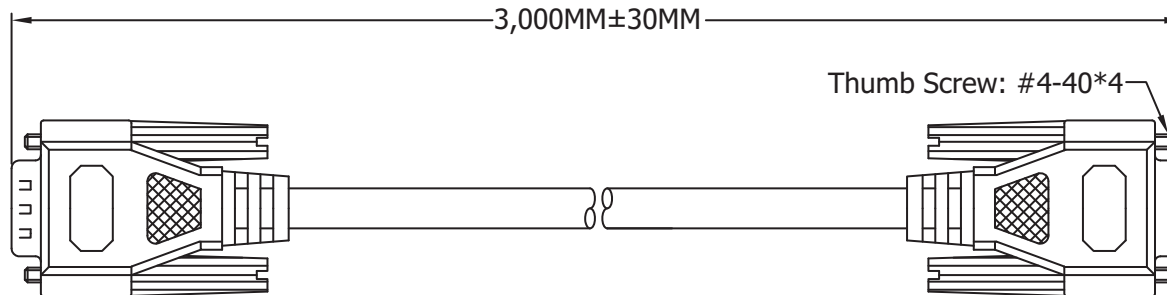


HDB 15 Male
Plastic: Blue

HDB 15 Female
Plastic: Blue



PIN OUT

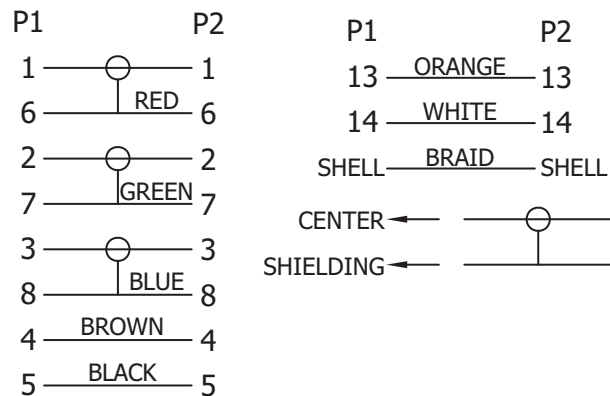

Material:

- 1.CABLE:28AWG(7/0.127 T.C)*3COAX(75 OHMS)+INSULATION:FO-PE INNER
JACKET:PVC OD:Ø2.5± 0.1mm(UL-1354)+28AWG(7/0.127 T.C)*4C+
INSULATION:SR-PVC ID:Ø0.85± 0.05mm(UL-1061)+AL/MY+DRAIN
WIRE:26AWG(7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC
COLOR:BEIGE, OD:Ø 8.1± 0.15mm UL-2919
- 2.CONNECTOR:
P1:HDB 15P MALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL
(9TH PIN UNLOAD)
P2:HDB 15P FEMALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL
- 3.SHIELD:COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID
- 4.HOOD:MOLDED TYPE,PVC 45P,COLOR:BEIGE.
- 5.ELECTRONIC TEST:
<1>.100% OPEN SHORT & MIS WIRE TEST
<2>.CONTACT RESISTANCE 3 OHMS MAX
<3>.INSULATION RESISTANCE 20 M OHMS MIN
- 6.PACKING:SEE P-0039 REV.C PACKING DRAWING
(HANKING SIZE MUST BE SMALLER THAN PACKING)
PACKING TYPE: DB VP4.

Scale	1:1							Name
TOLERANCE						Drawn	11.15.11	Chappel
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

RoHS Complaint

Item No.	Item Description	Unit	Quantity	Rate	Amount
----------	------------------	------	----------	------	--------

AK3730-3-R

Title	Premium VGA Monitor extension cable - HD D-Sub 15-pin Male <=> Female, 3 Meters
--------------	--

Drawing No.

rev00

Replace

Sheet
