


HD15 MALE

HD15 FEMALE

5000±50

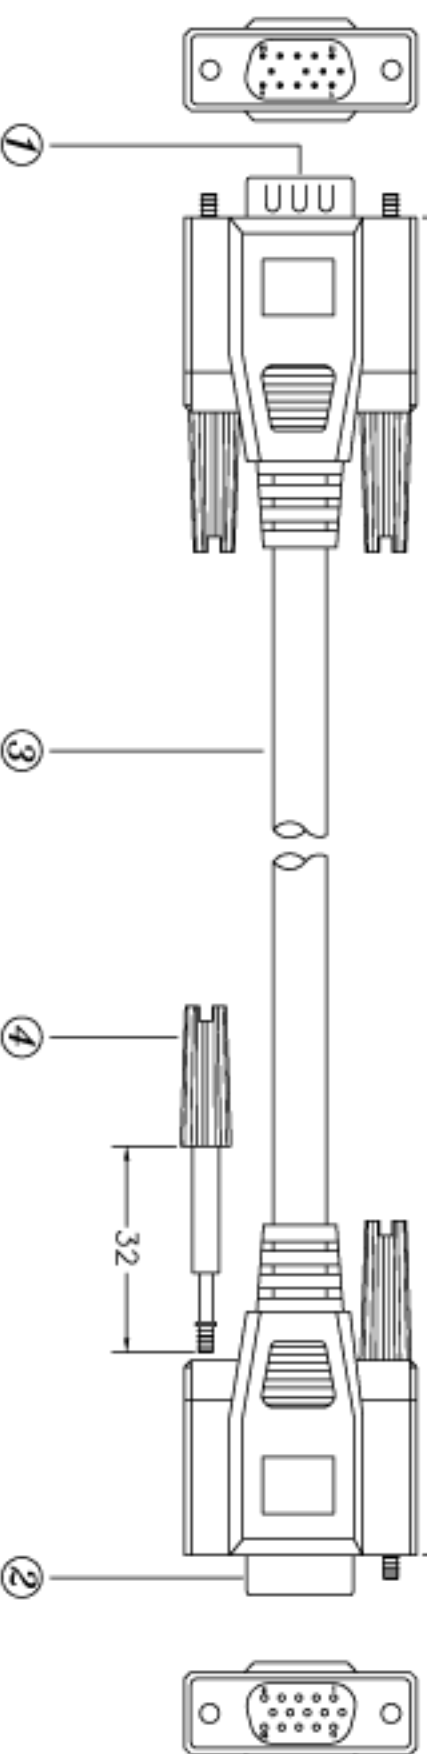

CONFIGURATION:

HD15M

HD15F

1	RED(COAX.)	1	RED(COAX.)
2	RED(GROUND)	2	RED(GROUND)
3	GREEN(COAX.)	3	GREEN(COAX.)
4	GREEN(GROUND)	4	GREEN(GROUND)
5	BLUE(COAX.)	5	BLUE(COAX.)
6	BLUE(GROUND)	6	BLUE(GROUND)
7	BROWN	7	BROWN
8	BLACK	8	BLACK
9	GREEN	9	GREEN
10	RED	10	RED
11	ORANGE	11	ORANGE
12	WHITE	12	WHITE
13	YELLOW	13	YELLOW
14	(BRAID)	14	(BRAID)
15	SHIELD	15	SHIELD

MAT'L:

1.CABLE:UL2919,3COAXIAL+7C+1+AL/MY+BRAID,0.D:8.5
2.CONNECTORS:HD15M,9th EMPTY,BLACK

HD15F,BLACK

3.THUMBSCREW:#4-40UNC,E32

4.BLACK HEAT SHRINK:ø1.5 X 15:6PCS

ø3 X 8:6PCS

5.COPPER SIZE:30 X 50

NOTE:

1.TOTAL LENGTH:5000±50mm

2.COLOR:BEIGE

3.MOLDED TYPE

4.360° SOLDER

5.ROHS COMPLIANT

RoHS

Compliant

DATE	18 JUN,1998	PARTS NO	MN3073N	TITLE:	HD15 MALE-HD15 FEMALE (MOLDED TYPE)	AK3740X 5M
UNIT	MM	DRAWN NO	001131			
SCALE		BUYER NO	002			
ASSMANN ELECTRONICS,INC.						

NO.	DESCRIPTION	QTY
④	THUMBSCREW:#4-40UNC,E32	4
③	#28,UL2919,3COAX+7C+1+AL/MY+B,0.D:8.5 5M	1
②	HD15F,BLACK	1
①	HD15M,9th EMPTY,BLACK	1

DRAWN	Y.C.C	CHECK	APPRO
6/18			