



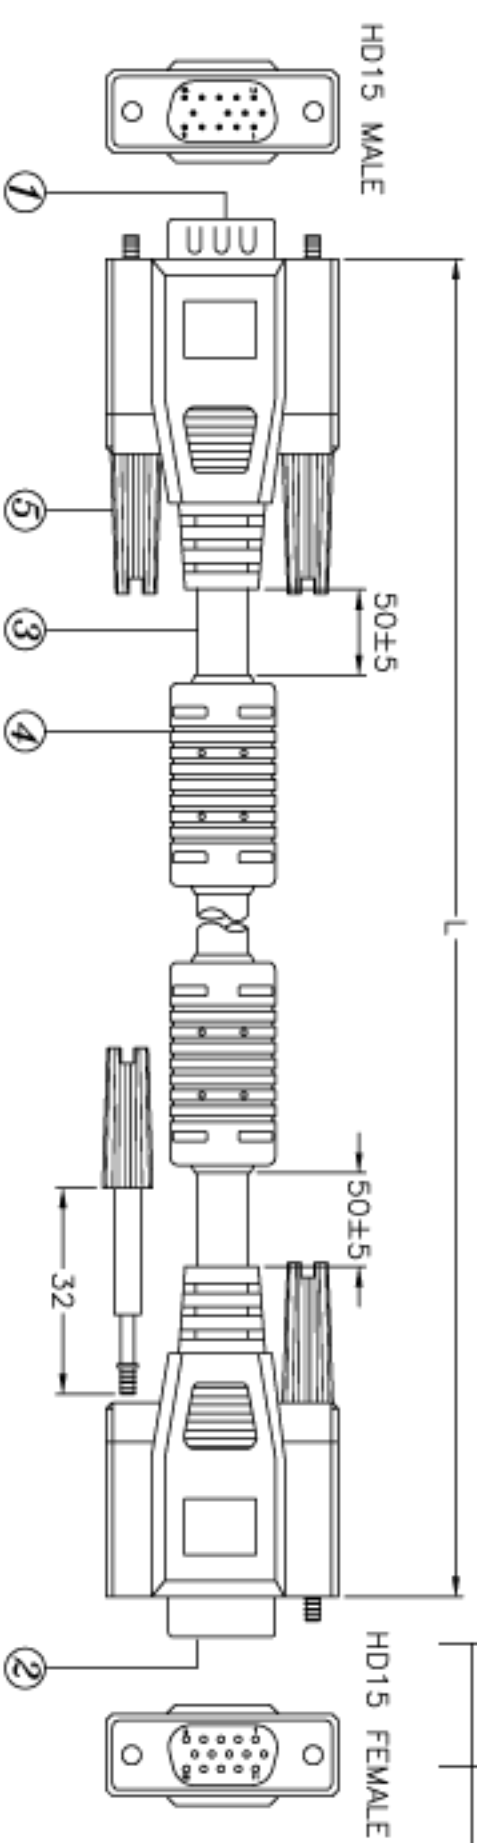

CONFIGURATION:
HD15M

HD15F

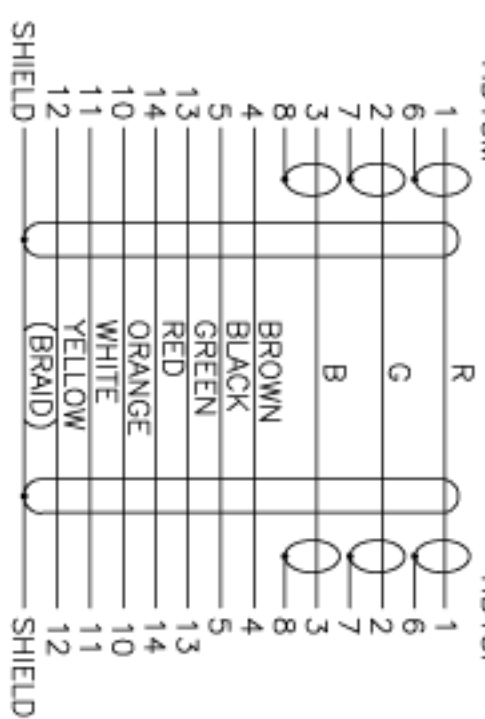

- MAT'L:
- 1.CABLE:#28,UL2919,3COAX+7C+1+AL/MY+Braid,O.D:8.5
 - 2.CONNECTOR:HD15M,9th EMPTY,BLACK
 - 3.THUMBSCREW:#4-40UNC,E32
 - 4.FERRITE CORE:RH16x28x9
 - 5.COPPER TAPE:30x50mm
 - 6.BLACK HEAT SHRINK TUBE:Ø1.0x14:6PCS
- NOTE:
- 1.TOTAL LENGTH:L
 - 2.COLOR:BEIGE
 - 3.MOLDED TYPE
 - 4.360° SOLDER
 - 5.ROHS COMPLIANT

ITEM NO.	L
AK3915XF	15000±100mm
AK3920XF	20000±100mm

RoHS
Compliant

DATE	16 JUL,2001	PARTS NO	MN3273N	TITLE:	HD15 MALE-HD15 FEMALE,W/2*FERRITE (MOLDED TYPE)
UNIT	MM	DRAWN NO	001526		
SCALE		BUYER NO	002		

NO.	DESCRIPTION	QTY
⑤	THUMBSCREW:#4-40UNC,E32	4
④	FERRITE CORE:RH16x28x9	2
③	#28,UL2919,3COAX+7C+B,O.D:8.5,BEIGE	L
②	HD15F,BLACK	1
①	HD15M,9th EMPTY,BLACK	1

ASSMANN ELECTRONICS,INC.