

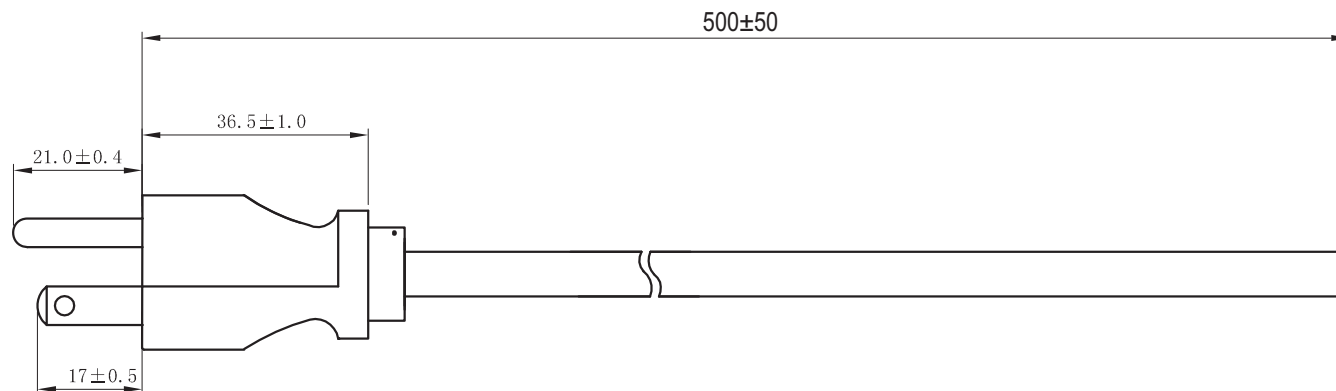
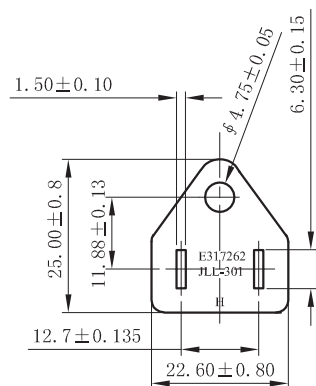


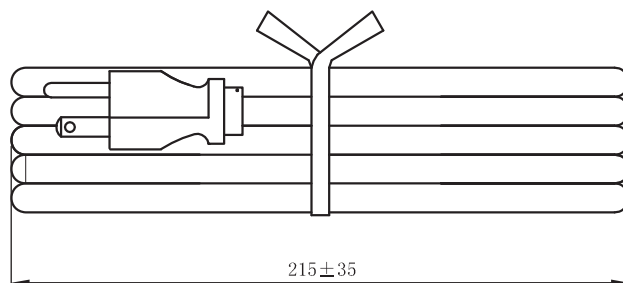

CONDUCTOR CONSTRUCTION (N/mm) :
41/0.16AS

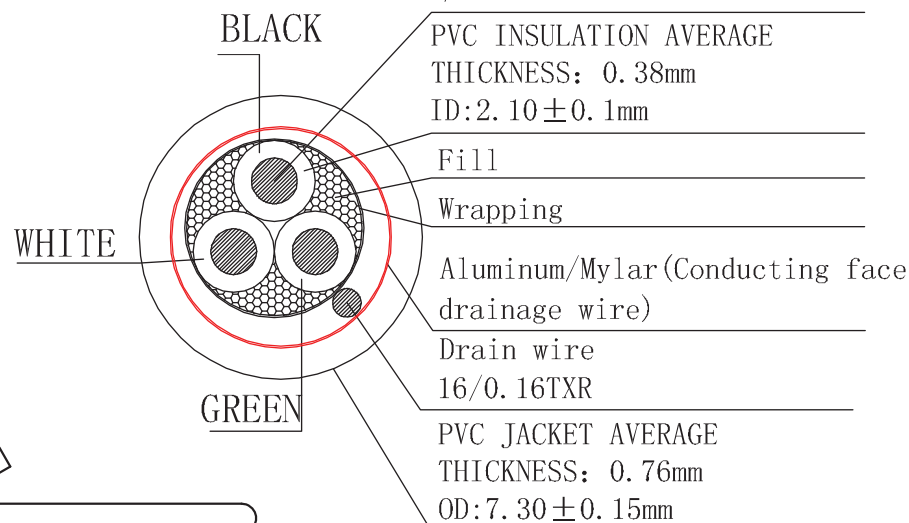

Material:

- E243711(UL) SVT 3 x 18AWG(0.824MM²)
VW-1 Shielded, 60°C 300V
- CSA 228191 SVT 3 x 18AWG(0.824MM²)
FT2 Shielded 60°C 300V -LF-
- Jacket Color: Black
- E - Green; L - Black; N - White

Electrical:

- 100% Open & Short Testing
- Insulation Resistance: 100MΩ (Min.)
- Voltage: 500V DC / 1 Min.

Unit: MM

RoHS
Compliant

ITEM NO.

AK500-OE-5-0.5-R

TITLE

Power Cord - SVT/Open End, Shielded, 60°C,
18AWG, 0.5 Meter

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
©Copyright 2011 by Assmann Electronic Components
All International Rights Reserved