



A
B
C
D
E
F
G
H

1234567

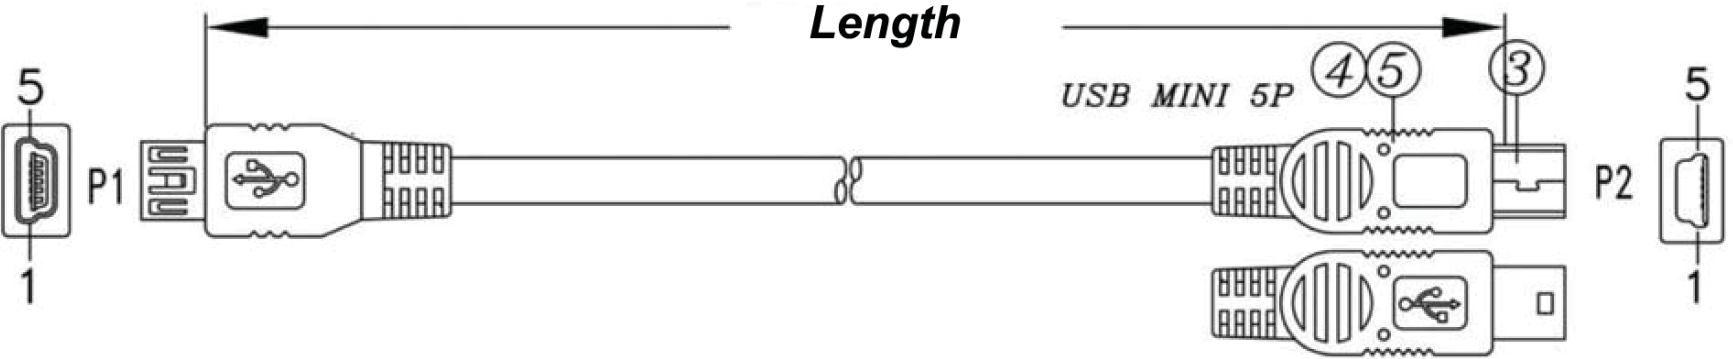

Electrical test:
1.100% short,open,miswire test
2.Conduct resistance:2 Ohm(max)
3.Insulation resistance:10Mohm(min)
4.dielectric test:DC 300V

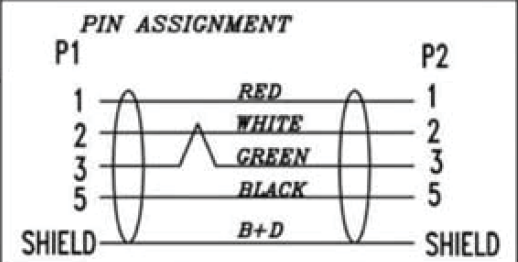

Part Number
AK669M-X-R

Lenght
1 1Meter
2 2Meters



13	PACKING TAPE COLOR YELLOW L=2200mm			1/100
12	TRANSPARENT ADHESIVE TAPE L=2600mm			1/100
11	CARTON 5 LAYER 40*30*20CM K=K GLUE TYPE			1/100
10	WATERPROOF BAG (14+15)*24" T=0.04mm			1/100
9	PE BAG 230*300*0.04mm PRINT BLACK"MADE IN CHINA"+10PCS			1/10
8	PE BAG 100*200*0.04mm PRINT BLACK"MADE IN CHINA"	1	PCS	
7	ROHS LABEL 35*22mm WHITE/BOTTOM TEXT/BLACK		112/100	
6	INNER MODEL LDPE	4	g	
5	OUTER MODEL PVC 45P COLOR BLACK(CS-001)	9	g	
4	ROUND TIN OD.8mm		0.4	g
3	USB MINI USB5P/M SOLDER TYPE PLASTIC BLACK	1	P2	
2	USB MINI USB5P/F SOLDER TYPE PLASTIC BLACK	1	P1	
1	USB UL2725 28AW*1P+28AWC*2C+AL/MY+D+B0D3.8mm BLACK(CS-001)	01	1	2000mm
NO.PART NO.		DESCRIPTION	VENDER	QTY UNIT/REF

REV	REV./NO.	DESCRIPTION	DATE
ASSMANN WSW components		TITLE: MIN USBUSB5P/F TO MIN USB5P/M CABLE 1000mm	Version 1.1
DRAW		DEV NO.	REV A
JE		CUS. P/N:	REV
CONFIRM		CUS.	X013
DIRECTOR			
CONFIRM			
MANAGER			
APPROVAL			
SL			
SHEET 1		TO 1	

A
B
C
D
E
F
G
H

1234567