


A  
B  
C  
D  
E  
F  
G  
H

A  
B  
C  
D  
E  
F  
G  
H

USB A Type Male  
Plastic: White

USB A Type Female  
Plastic: White

3,000MM±30MM

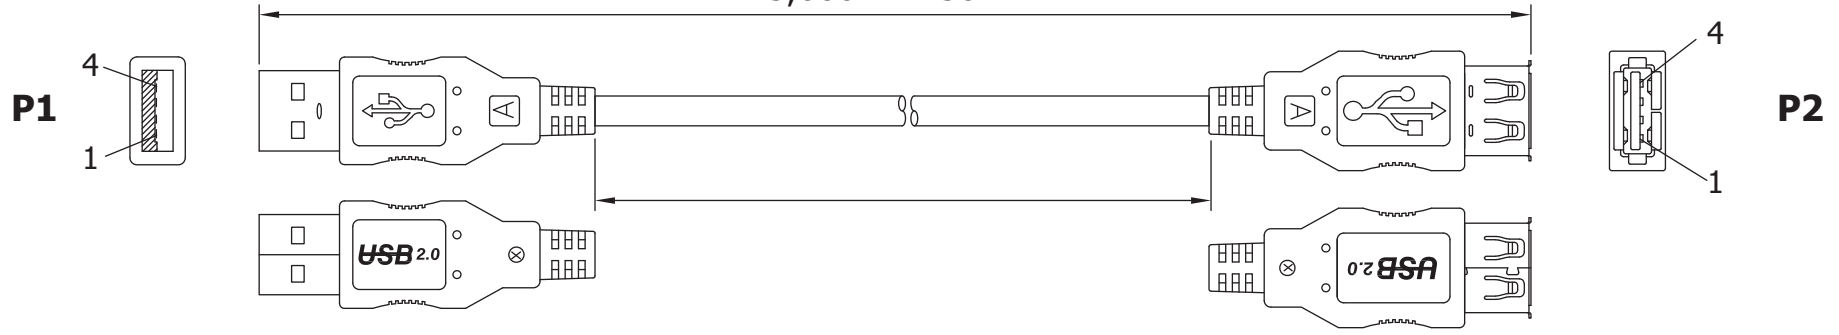

- Material:**
- Cable: UL-2725 [28AWG(7/0.127)\*1PR+24AWG(7/0.203)\*2C +AL-FOIL/MYLAR+DRAIN WIRE(7/0.127)+65% BRAID]TIN
    - OD: 4.7±0.15MM
    - PVC Jacket
    - Color: Beige
  - P1 Connector: USB A Type Male
    - Gold Plated 30µ" Contact
    - Nickel Plated Shell
  - P2 Connector: USB A Type Female
    - Gold Plated 30µ" Contact
    - Nickel Plated Shell
  - Hood: Molded Type, PVC 45P, Color Beige
  - Tooling Cavity indication for inspection
- Electrical:**
- 100% Open short & mis wire test
  - Contact Resistance: 3Ω Max.
  - Insulation Resistance: 20MΩ Min.

PIN OUT					
	P1		P2		
RED	1	—	1	VCC	
WHITE	2	—	2	-DATA	
GREEN	3	—	3	+DATA	
BLACK	4	—	4	GROUND	
SHELL		BRAID		SHELL	

Scale	1:1					Name	Item No.	
TOLERANCE						Chappell	<b>AK669/2-30-R</b>	
X.X	±0.40				Drawn	08.29.11		
X.XX	±0.25				Approved	10.19.11		Title Hi-Speed USB 2.0 Extention cable, 3 Meters, Beige, USB A Male <=> USB A Female
X.XXX	±0.15							Drawing No.
Angle	±3°						rev00	
							Replace	
							Sheet	
		Modification	Date	Name				

