



1 2 3 4 5 6 7

A
B
C
D
E
F
G
H

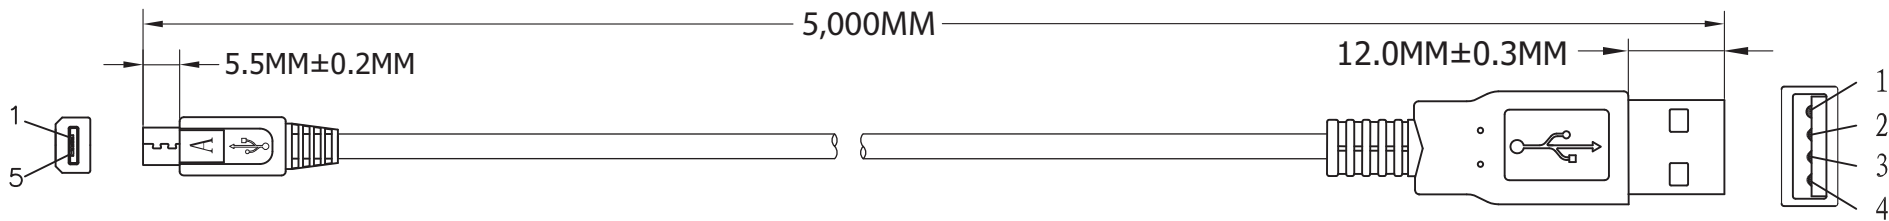

PIN ASSIGNMENT			
P1			P2
1	RED	1	1
2	WHITE	2	2
3	GREEN	3	3
4+5	BLACK	4	4
SHELL	DRAIN + BRAID	SHELL	

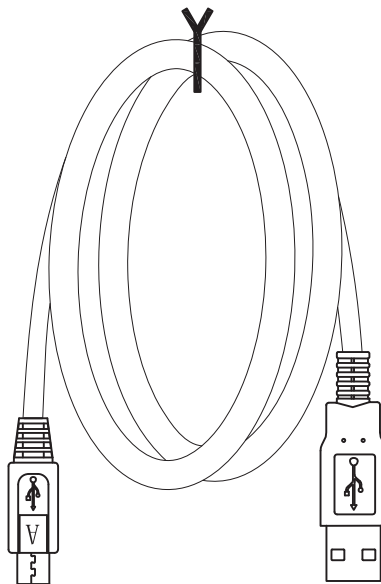

Material:

- Cable: USB2.0 UL 27725 [28AWG(7/0.1 2 T.C+AL)x1P+28AWG(7/0.12TC)x2C]+AEB(48B TC)
 - Jacket: Black
 - OD: 3.5MM
- Connector: Micro USB 5P A/M Solder Type
 - Shell: Nickel
 - Pin: G/F
 - Insulator Color: White
- Outer Jacket: Black PVC-50P

Electrical:

- 100% Open short & mis wire test
- Contact Resistance: 3Ω Max.
- Insulation Resistance: 20MΩ Min.
- Hi-Pot test: 300V DC

Scale	1:1						Name
TOLERANCE						Drawn	10.19.11
X.X	±0.40					Approved	Chappell
X.XX	±0.25						
X.XXX	±0.15						
Angle	±3°						
Modification	Date	Name					



Item No.	AK67321-5-R
Title	
Drawing No.	
Replace	rev00
Sheet	

1 2 3 4 5 6 7

A
B
C
D
E
F
G
H