


A
B
C
D
E
F
G
H

1234567

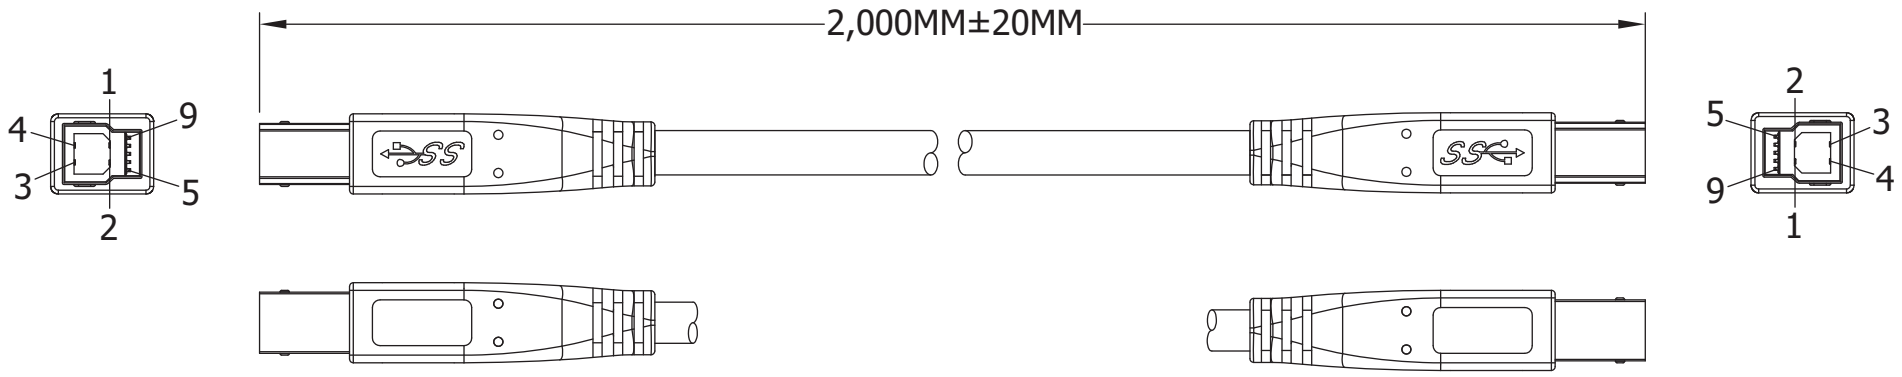

PIN OUT		
P1		P2
1	RED	1 PWR
2	WHITE	2 UTP_D-
3	GREEN	3 UTP_D+
4	BLACK	4 GND_PWRrt
5	BLUE	5 SDP1-
6	YELLOW	6 SDP1+
7	D.W	7 SDP1_Drain & SDP2_Drain
8	PURPLE	8 SDP2-
9	ORANGE	9 SDP2+
SHELL	B.D	SHELL

- Material:**
- Cable: UL-2725 [#28(7/0.1 27 T.C)*1P INS:Foam-PE+D.W (7/0.127 T.C)+AL/MY+Hot-melt-Mylar]*2C+#28(7/0.127 T.C)*1P INS:Polyolefin + #28(7/0.127 T.C)*2C INS:Polyolefin + AL/MY +B.D(85%)
 - PVC Jacket
 - OD: 5.2±0.15MM
 - Color: Black
 - P1 & P2 Connectors: USB 3.0 Type Male 9 Pin
 - Contact: 30μ”
 - Shell: Ni-Plated
 - Hood: Molded Type, PVC 45 P (Black)
- Electrical:**
- 100% Open short & mis wire test
 - Contact Resistance: 3Ω Max.
 - Insulation Resistance: 10MΩ Min.
 - Hi-Pot 300V DC

Unit: MM



Scale	1:1							Name
TOLERANCE						Drawn	08.29.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

Item No.	
AK673/3-2-R	
Title USB 3.0 Cable, B Male <=> B Male, 9 Pin, Insulation Blue, 2 Meters	
Drawing No.	rev00
Replace	Sheet

1234567