


PIN ASSIGNMENT			
P1		P2	
1	RED	1	
2	WHITE	2	
3	GREEN	3	
5	BLACK	5	
SHELL	DRAIN + BRAID	SHELL	

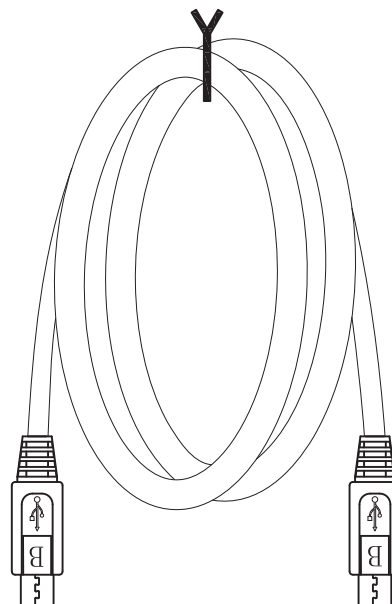

Material:

- Cable: USB2.0 UL2725 [28AWG(7/0.12TC+AL)*1P+ 28AWG(7/0.12TC)*2C]+AEB(48B TC)
 - Jacket: Black
 - OD: 3.5MM
- Connectors: Micro USB 5P B/M Solder Type
 - Shell: Nickel
 - Pin: G/F
 - Insulator Color: Black
- Outer Jacket: Black PVC-50P

Electrical:

- 100% short, open, miswire test
- Conduct resistance: 2Ω Max.
- Insulation resistance: $5M\Omega$ Min.
- Hi-Pot test: 300V DC

⊕ = Assmann logo

RoHS
Compliant

ITEM NO.

AK67401-0.5-R

TITLE

USB2.0 Micro Connection Cable, 0.5 Meter
USB B Micro Male <=> USB B Micro Male

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • eMail: info@assmann.us

THIS DRAWING IS UNPUBLISHED
©Copyright 2009 by Assmann Electronic Components
All International Rights Reserved