



A

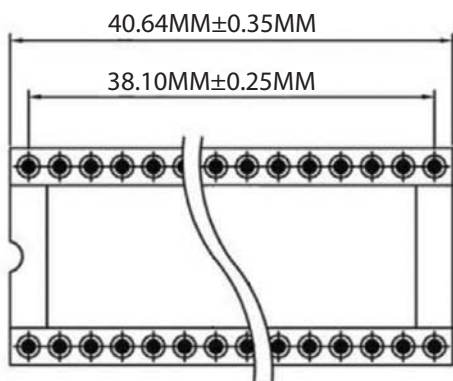


A

B




B

C

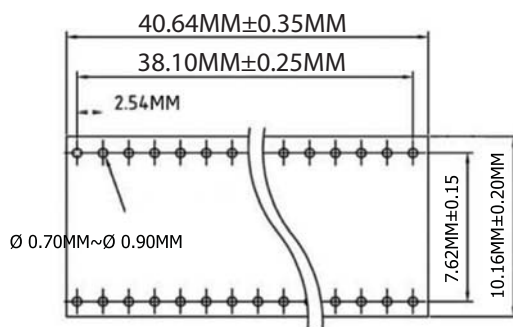

C

D

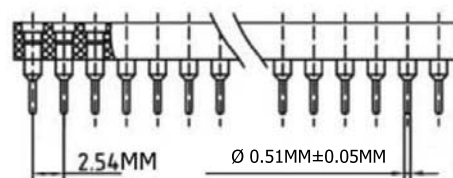

D

E

Materials

Pin (outer sleeve) :	Brass, machined, CuZn38Pb2
Clip (contact 4 finger) :	Beryllium copper, heat treated or PHBZ
Plating (outer sleeve) :	Tin plated : 2µm/80µ"nickel, 5µm/200µ" Tin
Plating clip (contact) :	2µm/80µ"nickel, full gold
Insulator body (black) :	Glass filled thermoplastic polyester UL94V-0

F

Electrical

Current rating : 3 Amps/contact max.
Contact resistance : Max 4mΩ
Insulation resistance : Min 10,000mΩ @ 500 V AC
Operating Voltage : 100 VRMS / 150 V AC

H

[illegible]

ASSMANN
WVSV components

Item No.	
AR32-HZL-TT-R	
Title IC-Socket, 32 Pin, Machined Contacts, Pitch: 2.54MM, Pin Length: 7.43MM	
Drawing No. 	rev00
Replace	Sheet

H