Material
Solid PIN: Brass(CuZn), Tin plated
Insulator (housing): Thermoplastic (UL94V-0)

Electrical cULus
Voltage rating: 300V
Current rating: 10A
Withstanding Voltage: 1.6KV
Operating temperature: -40°C to +115°C
Soldering temperature: 250°C±10°C/5 Sec
Safety Approval: c us

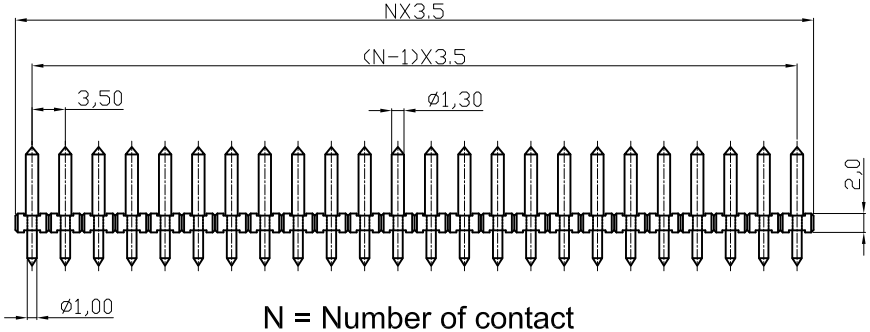

N = Number of contact



P.C.B. LAYOUT

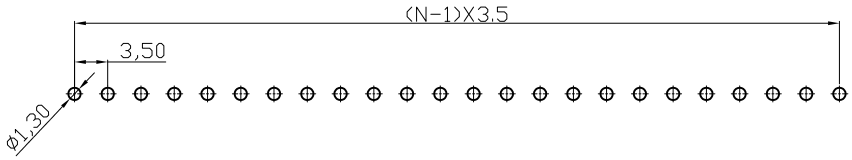

RoHS compliant

Scale	1:1						Date	Name	Customer-No.
TOLERANCE						Drawn	29.11.2006	Hellwig	
X.	±0.50					Approved	29.07.2009	Hellwig	ASSMANN WSW-No. A-TB350-OPxx
X.X	±0.30								
X.XX	±0.10								
DIM	TOL	②	Update	29.07.2009	Dean				Drawing-No. ASS 1149 CO rev02
X.°	±1°								
X.X°	±X°	①	Drawn	29.11.2006	Hellwig				
Angle	TOL	Id.	Modification	Date	Name				Replace / Sheet

ASSMANN WSW components

SVxxxx