




	1	2	3	4	5	6	7	
A								A
B								B
C								C
D								D
E								E
F								F
G								G
H								H
	1	2	3	4	5	6	7	SV1071



P.C.B. LAYOUT

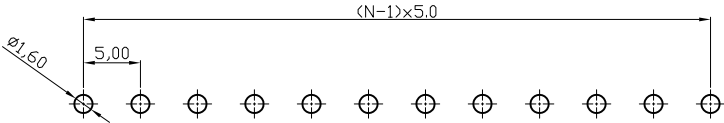

N = Number of contact

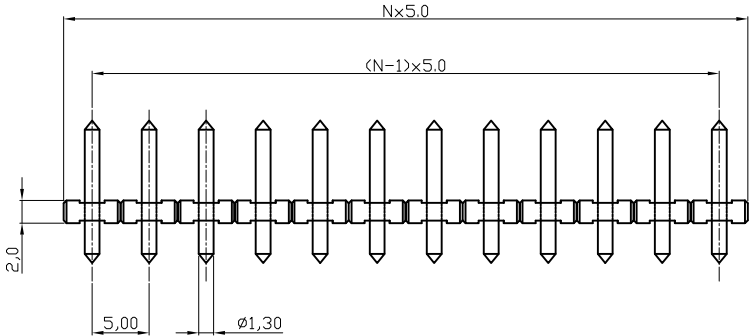

Material:
Solid PIN: Brass(CuZn)
Surface of solder tail: Tin plated
Insulator(housing): Thermoplastic (UL94V-0)

Electrical:	UL	CSA	VDE	TUV
Voltage rating:	300V	300V	300V	300V
Current rating:	10A	10A	12A	15A
Withstanding Voltage:	1.6KV	1.6KV	2.5KV	2.5KV
Operating temperature:	-40°C to +115°C			
Soldering temperature:	250°C±10°C/5 Sec			
Safety Approval:				

RoHS compliant

Scale	1:1					Date	Name	Customer-No.	
TOLERANCE					Drawn	07.12.2006	Hellwig		
X.	±0.50					Approved	29.07.2009	Hellwig	ASSMANN WSW-No. A-TB500-OPxx
X.X	±0.30								
X.XX	±0.10	③	Update	29.07.2009	Dean				
DIM	TOL	②	Update technical date	28.07.2008	N.Schulz				
X.°	±1°								
X.X°	±X°	①	Drawn	07.12.2006	Hellwig	ASS 1157 CO			rev03
Angle	TOL	Id.	Modification	Date	Name	Replace			Sheet