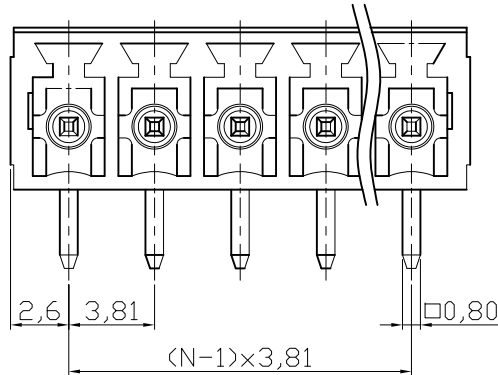
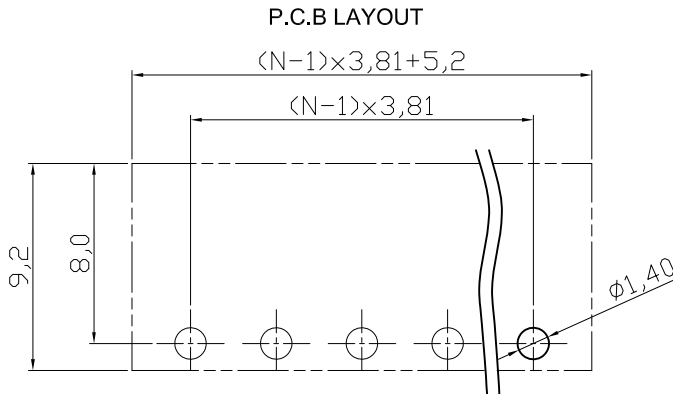
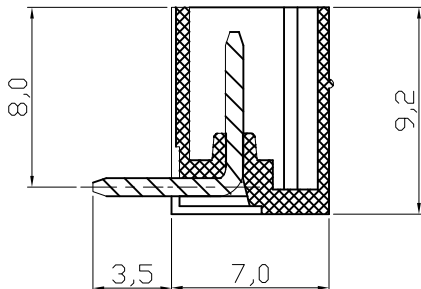
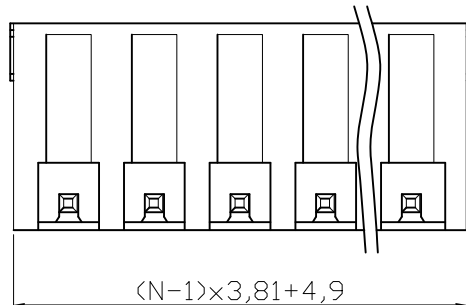


	1	2	3	4	5	6	7			
A	  Material Terminal body (contact pin): Brass(CuZn) Tin plated Insulator (housing): Thermoplastic (UL94V-0),Green Electrical cULus/CSA/VDE Voltage rating: 300VAC/125VAC/125VAC Current rating: 10A/8A/10.5A Wire range: Solid wire(AWG): Stranded wire(AWG): Withstanding Voltage: 1.6KV/1.6KV/2.5KV Operating temperature: -30°C to +105°C Soldering temperature: 250°C±10°C/5 Sec Safety Approval:      N= NUMBER OF CONTACTS							A		
B								B		
C								C		
D								D		
E								E		
F								F		
G	RoHS compliant		Scale 1:1				Date	Name	Customer-No.	G
TOLERANCE					Drawn	13.09.2006	Hellwig			
			X.	±0.50						
			X.X	±0.30			Approved	10.12.2009	Hellwig	ASSMANN WSW-No. A-TB381-OQxxCH
			X.XX	±0.10	③	Modify Notes	10.12.2009	Dean		
			DIM	TOL	②	Update	29.07.2009	Dean	Drawing-No.	
			X.°	±1°					ASS 2071 CO	rev03
			X.X°	±X°	①	Drawn	13.09.2006	Hellwig	Replace	Sheet
			Angle	TOL	Id.	Modification	Date	Name		
	1	2	3	4	5	6	7			