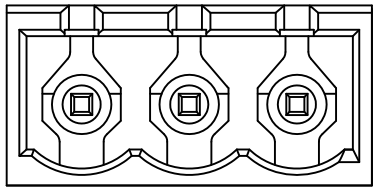

NOTES

Material

1.Terminal body(contact pin): Brass(CuZn) Tin plated
2.Insulator (housing): Thermoplastic (UL94V-0),Green

Electrical cULus/CSA/VDE/TUV

1.Voltage rating: 300VAC/250VAC/300VAC/300VAC
2.Current rating: 20A/15A/20A/20A
3.Wire range:
4.Solid wire(AWG):
5.Stranded wire(AWG):
6.Withstanding Voltage: 1.6KV/1.6KV/2.5KV/2.5KV
7.Operating temperature: -40°C to +115°C
8.Soldering temperature: 250°C±10°C/5 Sec
9.Safety Approval:

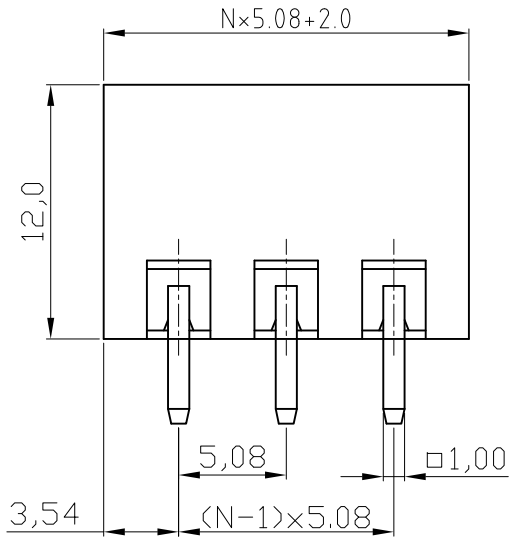

N = Number of contacts

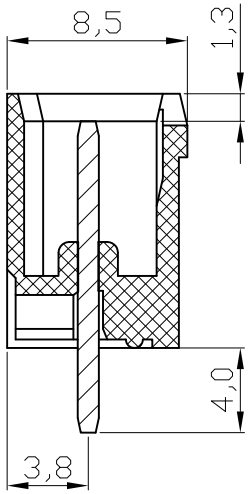

P.C.B LAYOUT

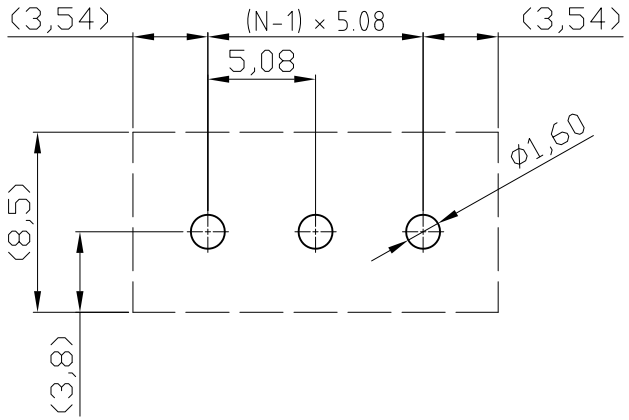

RoHS compliant

Scale	1:1						Date	Name
TOLERANCE						Drawn	04.05.2009	Dean
X.	±0.50					Approved	04.05.2009	Hellwig
X.X	±0.30							
X.XX	±0.10							
DIM	TOL							
X.°	±1°							
X.X°	±X°	1	Drawn	04.05.2009	Dean			
Angle	TOL	Id.	Modification	Date	Name			

Customer-No.

ASSMANN WSW-No.
A-TB508-OQxxCV

Drawing-No.
ASS 3502 CO

rev01

Replace

Sheet

ASSMANN WSW components

SV1482