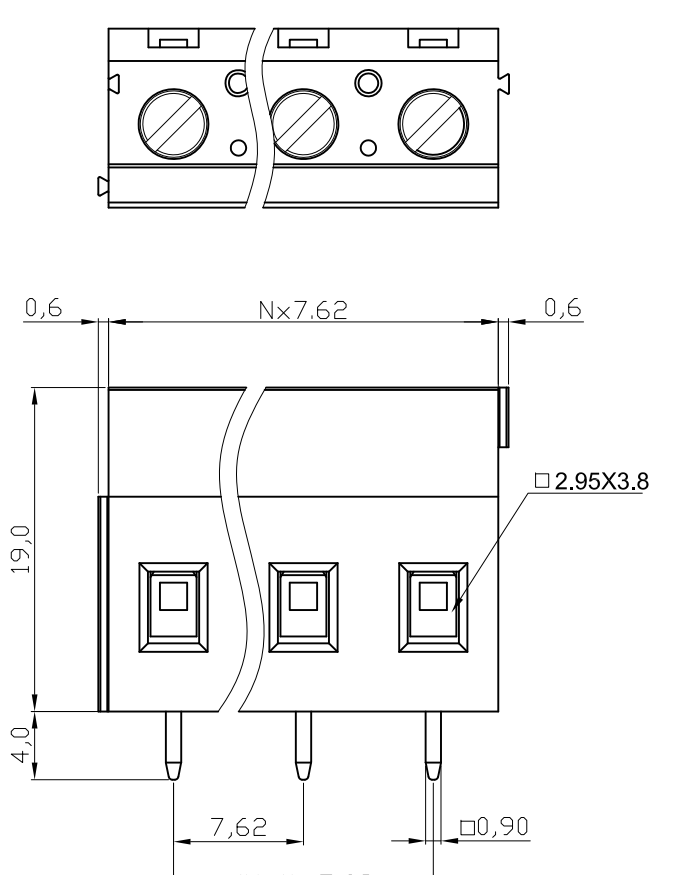


	1	2	3	4	5	6	7																																		
A	 P.C.B LAYOUT Material Terminal body (metal housing): Brass(CuZn) Terminal screw: Steel Zinc plating "-" slot type Contacts: Brass Surface of solder tail: Tin plated Insulator (housing): Thermoplastic (UL94V-0),Green Electrical Voltage rating: 300VAC Current rating: 20A Solid wire(AWG): 12-30 Stranded wire(AWG): 12-30 Torque(Lb-In): 3.5 Screw: M3 Wire strip length: 6-7mm Withstanding Voltage: 1.6KV Operating temperature: -40°C to +115°C Soldering temperature: 250°C±10°C/5 Sec Safety Approval:  us N=Number of contacts <table><tr><td>Scale</td><td>1:1</td></tr><tr><td>TOLERANCE</td><td></td></tr><tr><td>X.</td><td>±0.50</td></tr><tr><td>X.X</td><td>±0.30</td></tr><tr><td>X.XX</td><td>±0.10</td></tr><tr><td>DIM</td><td>TOL</td></tr><tr><td>X.°</td><td>±1°</td></tr><tr><td>X.X°</td><td>±X°</td></tr><tr><td>Angle</td><td>TOL</td></tr></table> RoHS compliant ① Drawn 29.07.2009 Dean Id. Modification Date Name 							Scale	1:1	TOLERANCE		X.	±0.50	X.X	±0.30	X.XX	±0.10	DIM	TOL	X.°	±1°	X.X°	±X°	Angle	TOL	A															
Scale								1:1																																	
TOLERANCE																																									
X.								±0.50																																	
X.X								±0.30																																	
X.XX								±0.10																																	
DIM	TOL																																								
X.°	±1°																																								
X.X°	±X°																																								
Angle	TOL																																								
B	B																																								
C	C																																								
D	D																																								
E	E																																								
F	F																																								
G	RoHS compliant ① Drawn 29.07.2009 Dean Id. Modification Date Name  <table><tr><td>Scale</td><td>1:1</td></tr><tr><td>TOLERANCE</td><td></td></tr><tr><td>X.</td><td>±0.50</td></tr><tr><td>X.X</td><td>±0.30</td></tr><tr><td>X.XX</td><td>±0.10</td></tr><tr><td>DIM</td><td>TOL</td></tr><tr><td>X.°</td><td>±1°</td></tr><tr><td>X.X°</td><td>±X°</td></tr><tr><td>Angle</td><td>TOL</td></tr></table> <table><tr><td>Date</td><td>Name</td><td>Customer-No.</td></tr><tr><td>29.07.2009</td><td>Dean</td><td rowspan="2">ASSMANN WSW-No. A-TB762-VJxxH</td></tr><tr><td>29.07.2009</td><td>Hellwig</td></tr><tr><td colspan="2">Drawing-No.</td><td rowspan="2">ASS 3596 CO rev01</td></tr><tr><td colspan="2">Replace</td></tr><tr><td colspan="2">Sheet</td></tr></table>							Scale	1:1	TOLERANCE		X.	±0.50	X.X	±0.30	X.XX	±0.10	DIM	TOL	X.°	±1°	X.X°	±X°	Angle	TOL	Date	Name	Customer-No.	29.07.2009	Dean	ASSMANN WSW-No. A-TB762-VJxxH	29.07.2009	Hellwig	Drawing-No.		ASS 3596 CO rev01	Replace		Sheet		G
Scale	1:1																																								
TOLERANCE																																									
X.	±0.50																																								
X.X	±0.30																																								
X.XX	±0.10																																								
DIM	TOL																																								
X.°	±1°																																								
X.X°	±X°																																								
Angle	TOL																																								
Date	Name	Customer-No.																																							
29.07.2009	Dean	ASSMANN WSW-No. A-TB762-VJxxH																																							
29.07.2009	Hellwig																																								
Drawing-No.		ASS 3596 CO rev01																																							
Replace																																									
Sheet																																									
H	H																																								
	1	2	3	4	5	6	7	svxxxx																																	