

1 2 3 4 5 6 7

A

B

C

D

E

F

G

H

A

B

C


D

E




F

G

H

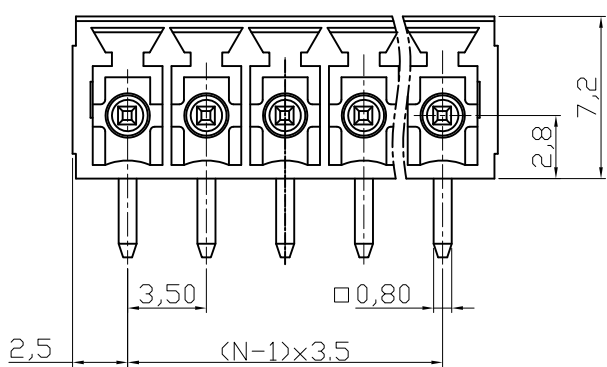

P.C.B LAYOUT

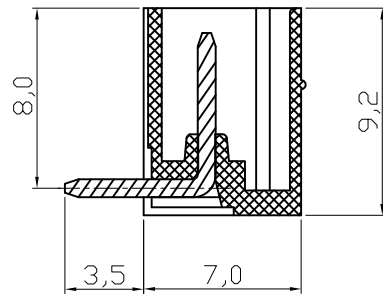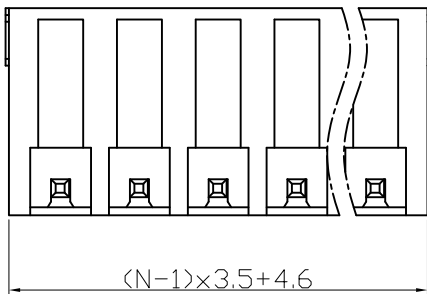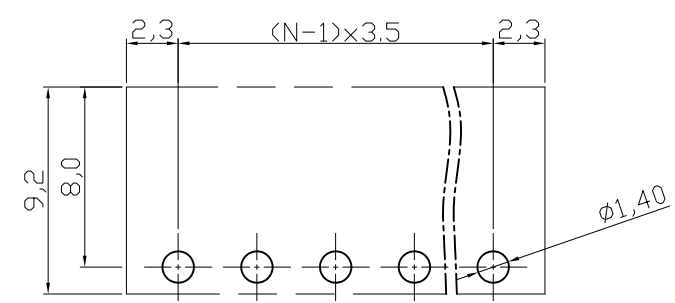

Material
Terminal body
(contact pin): Brass(CuZn) Tin plated
Insulator (housing): Thermoplastic (UL94V-0),Green

Electrical cULus/ CSA /VDE
Voltage rating: 300VAC/125VAC/125VAC
Current rating: 10A/8A/10.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Withstanding Voltage: 1.6KV/1.6KV/2.5KV
Operating temperature: -30°C to +105°C
Soldering temperature: 250°C±10°C/5 Sec
Safety Approval:

N= NUMBER OF CONTACTS

RoHS compliant

Scale	1:1						Date	Name	Customer-No.	
TOLERANCE						Drawn	29.07.2009	Dean		
X.	±0.50								ASSMANN WSW-No. A-TB350-OQxxCH	
X.X	±0.30					Approved	10.12.2009	Hellwig		
X.XX	±0.10									
DIM	TOL	②	Modify Notes	10.12.2009	Dean				Drawing-No.	
X.°	±1°								ASS 3601 CO rev02	
		①	Drawn	29.07.2009	Dean					
Angle	TOL	Id.	Modification	Date	Name				Replace	Sheet

1 2 3 4 5 6 7