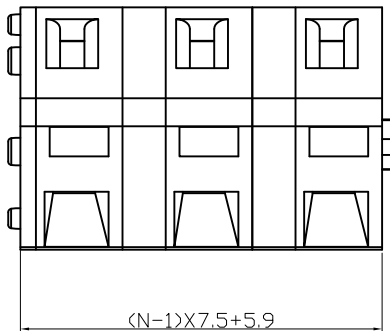
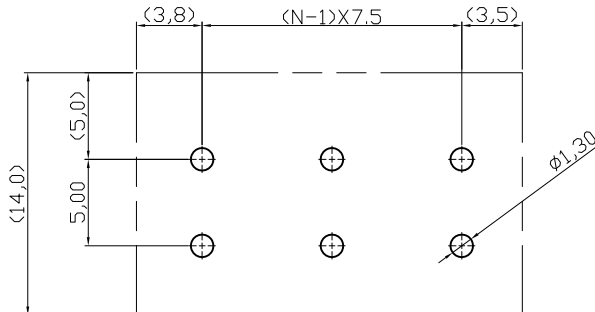
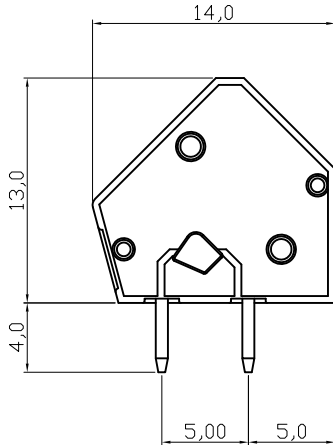
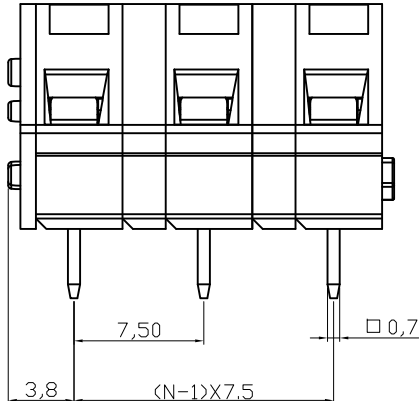


	1	2	3	4	5	6	7						
A	  RECOMMENDED PCB. LAYOUT  Material Terminal body (Contact pin): Brass Wire guard: Stainless steel Surface of solder tail: Tin plated Insulator (housing): Thermoplastic (UL94V-0),Grey Electrical Voltage rating: 300VAC Current rating: 15A Wire range: Solid wire(AWG): 12-28 Stranded wire(AWG): 12-28 Pull force: Screw: Wire strip length: 6-7mm Withstanding Voltage: 1.6KV Operating temperature: -40°C to +115°C Soldering temperature: 250°C±10°C/5 Sec Safety approval : us  N=Number of contacts							A					
B								B					
C								C					
D								D					
E								E					
F								F					
G	RoHS compliant		Scale 1:1		TOLERANCE		Date	Name	Customer-No.	G			
X. ±0.50			X.X ±0.30		Drawn	29.07.2009	Dean	ASSMANN WSW-No. A-TB750-HGxx					
			X.XX ±0.10		DIM TOL		Approved		29.07.2009	Hellwig			
			X.° ±1°		X.X° ±X°					Drawing-No.	ASS 3604 CO	rev01	H
			Angle TOL		① Drawn						Replace	Sheet	
			Id.		Modification		Date		Name				SVxxx
	1	2	3	4	5	6	7						