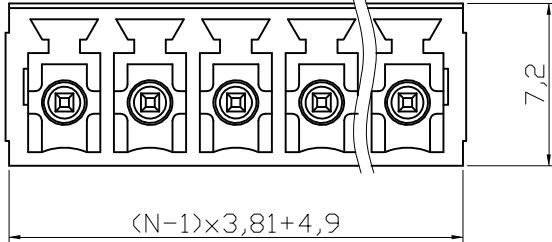
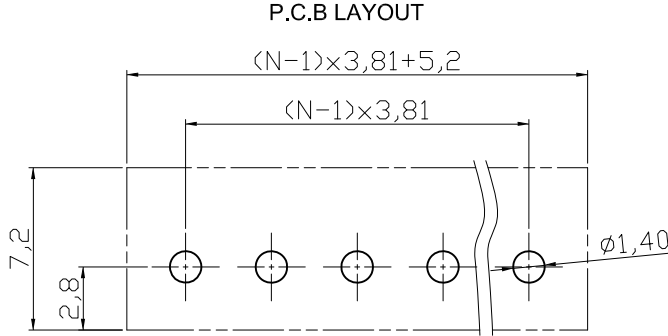
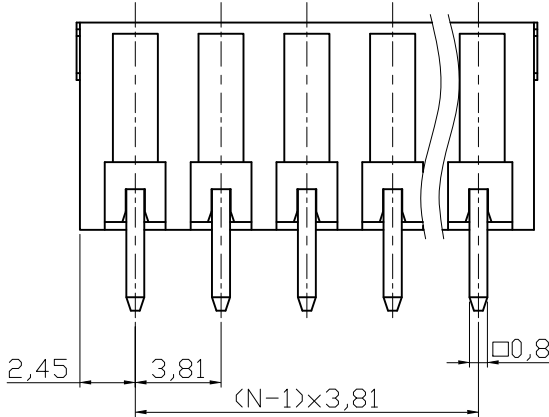
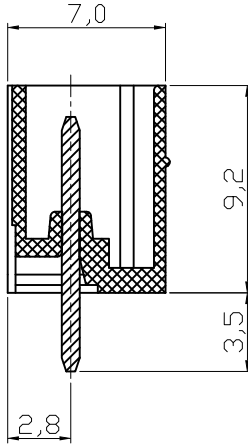


	1	2	3	4	5	6	7																																																																																									
A	 							A																																																																																								
B								B																																																																																								
C	 							C																																																																																								
D								D																																																																																								
E	Material Terminal body (contact pin): Brass(CuZn) Tin plated Insulator (housing): Thermoplastic (UL94V-0),Green Electrical cULus/CSA/VDE Voltage rating: 300VAC/125VAC/125VAC Current rating: 10A/8A/10.5A Wire range: Solid wire(AWG): Stranded wire(AWG): Withstanding Voltage: 1.6KV/1.6KV/2.5KV Operating temperature: -30°C to +105°C Soldering temperature: 250°C±10°C/5 Sec Safety Approval:   							E																																																																																								
F								F																																																																																								
G	RoHS compliant <table><tr><td>Scale</td><td>1:1</td><td></td><td></td><td></td><td></td><td></td><td>Date</td><td>Name</td><td>Customer-No.</td></tr><tr><td>TOLERANCE</td><td></td><td></td><td></td><td></td><td></td><td></td><td>Drawn</td><td>10.12.2009</td><td>Dean</td></tr><tr><td>X.</td><td>±0.50</td><td></td><td></td><td></td><td></td><td></td><td>Approved</td><td>10.12.2009</td><td>Hellwig</td></tr><tr><td>X.X</td><td>±0.30</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.XX</td><td>±0.10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>DIM</td><td>TOL</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.°</td><td>±1°</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td>①</td><td>Drawn</td><td>10.12.2009</td><td>Dean</td><td colspan="2" rowspan="3"></td><td>Drawing-No.</td><td>ASSMANN WSW-No. A-TB381-OQxxCV</td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td>Replace</td><td>rev01</td></tr></table>							Scale	1:1						Date	Name	Customer-No.	TOLERANCE							Drawn	10.12.2009	Dean	X.	±0.50						Approved	10.12.2009	Hellwig	X.X	±0.30									X.XX	±0.10									DIM	TOL									X.°	±1°											①	Drawn	10.12.2009	Dean			Drawing-No.	ASSMANN WSW-No. A-TB381-OQxxCV	Angle	TOL	Id.	Modification	Date	Name	Replace	rev01	G
Scale	1:1						Date	Name	Customer-No.																																																																																							
TOLERANCE							Drawn	10.12.2009	Dean																																																																																							
X.	±0.50						Approved	10.12.2009	Hellwig																																																																																							
X.X	±0.30																																																																																															
X.XX	±0.10																																																																																															
DIM	TOL																																																																																															
X.°	±1°																																																																																															
		①	Drawn	10.12.2009	Dean			Drawing-No.	ASSMANN WSW-No. A-TB381-OQxxCV																																																																																							
Angle	TOL	Id.	Modification	Date	Name			Replace	rev01																																																																																							
H								H																																																																																								
	1	2	3	4	5	6	7																																																																																									