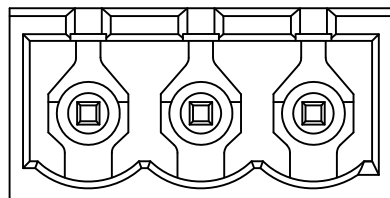
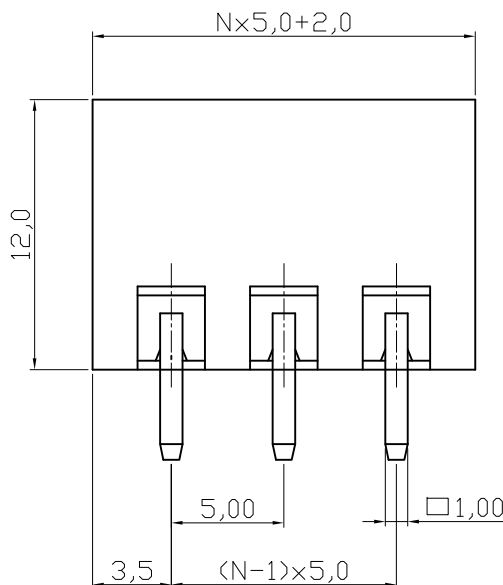
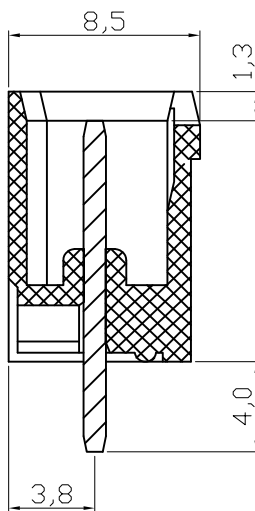
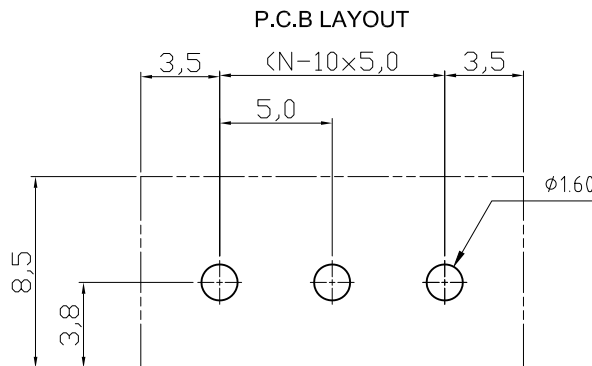


	1	2	3	4	5	6	7																																																																																									
A	  N= NUMBER OF CONTACTS  P.C.B LAYOUT  Material Terminal body (contact pin): Brass(CuZn) Tin plated Insulator (housing): Thermoplastic (UL94V-0),Green Electrical cULus/CSA/VDE Voltage rating: 300VAC/300VAC/300VAC Current rating: 20A/20A/20A Wire range: Solid wire(AWG): Stranded wire(AWG): Withstanding Voltage: 1.6KV/2.5KV/2.5KV Operating temperature: -30°C to +105°C Soldering temperature: 250°C±10°C/5 Sec Safety Approval:  <td>A</td>							A																																																																																								
B								B																																																																																								
C								C																																																																																								
D								D																																																																																								
E								E																																																																																								
F								F																																																																																								
G	RoHS compliant <table><tr><td>Scale</td><td>1:1</td><td></td><td></td><td></td><td></td><td></td><td>Date</td><td>Name</td><td>Customer-No.</td></tr><tr><td>TOLERANCE</td><td></td><td></td><td></td><td></td><td></td><td>Drawn</td><td>10.12.2009</td><td>Dean</td><td></td></tr><tr><td>X.</td><td>±0.50</td><td></td><td></td><td></td><td></td><td>Approved</td><td>10.12.2009</td><td>Hellwig</td><td>ASSMANN WSW-No. A-TB500-OQxxCV</td></tr><tr><td>X.X</td><td>±0.30</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.XX</td><td>±0.10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>DIM</td><td>TOL</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>Drawing-No.</td></tr><tr><td>X.°</td><td>±1°</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td>①</td><td>Drawn</td><td>10.12.2009</td><td>Dean</td><td colspan="2" rowspan="3"></td><td>ASS 3861 CO</td><td>rev01</td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td>Replace</td><td>Sheet</td></tr></table>							Scale	1:1						Date	Name	Customer-No.	TOLERANCE						Drawn	10.12.2009	Dean		X.	±0.50					Approved	10.12.2009	Hellwig	ASSMANN WSW-No. A-TB500-OQxxCV	X.X	±0.30									X.XX	±0.10									DIM	TOL								Drawing-No.	X.°	±1°											①	Drawn	10.12.2009	Dean			ASS 3861 CO	rev01	Angle	TOL	Id.	Modification	Date	Name	Replace	Sheet	G
Scale	1:1						Date	Name	Customer-No.																																																																																							
TOLERANCE						Drawn	10.12.2009	Dean																																																																																								
X.	±0.50					Approved	10.12.2009	Hellwig	ASSMANN WSW-No. A-TB500-OQxxCV																																																																																							
X.X	±0.30																																																																																															
X.XX	±0.10																																																																																															
DIM	TOL								Drawing-No.																																																																																							
X.°	±1°																																																																																															
		①	Drawn	10.12.2009	Dean			ASS 3861 CO	rev01																																																																																							
Angle	TOL	Id.	Modification	Date	Name			Replace	Sheet																																																																																							
H								H																																																																																								
	1	2	3	4	5	6	7																																																																																									