

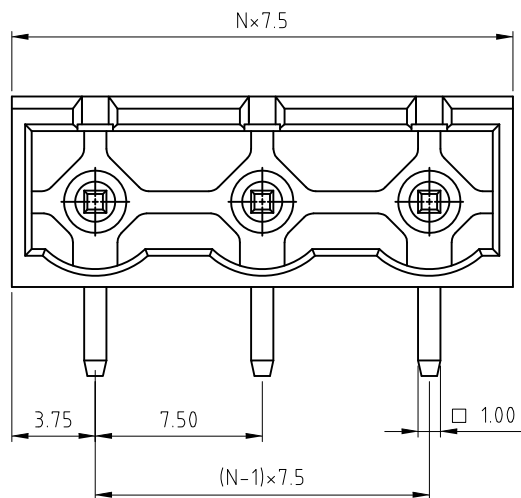


N=Number of contacts

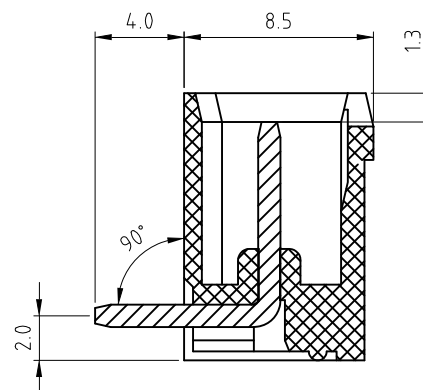

P.C.B LAYOUT

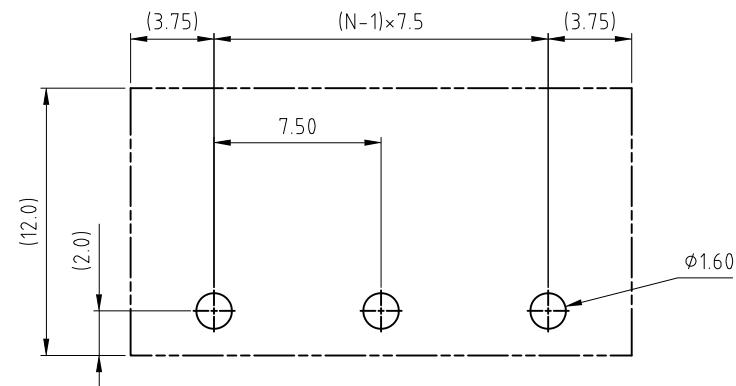

Material

- Terminal body
(contact pin): Brass(CuZn) Tin plated
- Insulator (housing): Thermoplastic (UL94V-0) Green

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 20A
- Wire range:
- Solid wire(AWG):
- Stranded wire(AWG):
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: (cULus) pending

RoHS compliant

Scale	1:1						Date	Name	Customer-No.
TOLERANCE						Drawn	10.12.2009	Dean	
X.	±0.50					Approved	10.12.2009	Hellwig	ASSMANN WSW-No.
X.X	±0.30								A-TB750-OQxxCH
X.XX	±0.10								Drawing-No.
DIM	TOL								ASS 3942 CO
X.°	±1°								rev01
		①	Drawn	10.12.2009	Dean			Replace	Sheet
Angle	TOL	Id.	Modification	Date	Name				