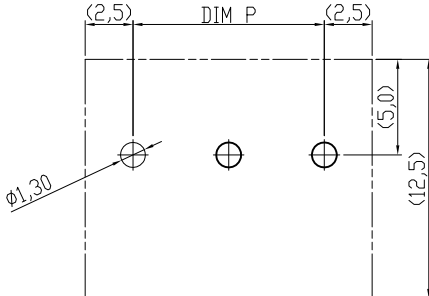
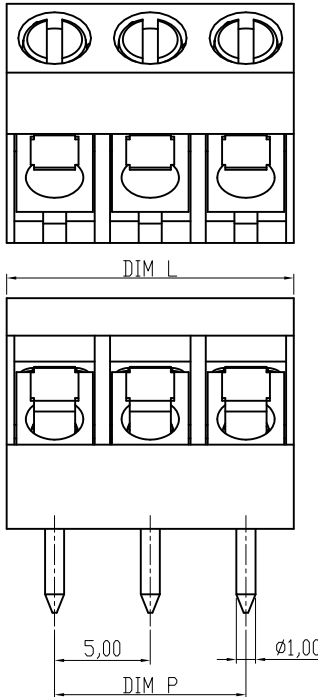
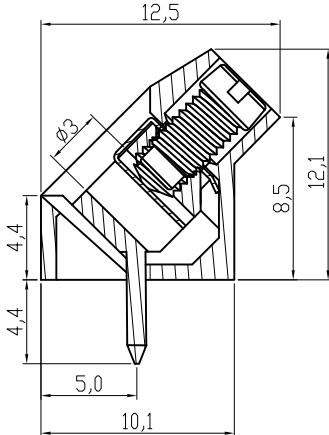


	1	2	3	4	5	6	7																																																																														
A	Material Terminal body(metal housing): Brass(CuZn) Terminal screw: Steel Zinc plating "-" slot type Wire guard: Stainless steel Surface of solder tail: Tin plated Insulator (housing): Thermoplastic (UL94V-0).BLACK							A																																																																													
B	Electrical cULus							B																																																																													
C	Voltage rating: 300VAC Current rating: 15A Wire range: Solid wire(AWG): 14-22 Stranded wire(AWG): 14-22 Torque(Lb-In): 3.5 Screw: M3 Wire strip length: 6-7mm Withstanding Voltage: 1.6KV Operating temperature: -40°C to +115°C Soldering temperature: 250°C±10°C/5 Sec Safety Approval: 							C																																																																													
D	  							D																																																																													
E	RECOMMENDER PCB LAYOUT							E																																																																													
F	DIMENSION <table><tr><td>L</td><td>Nx5,0</td></tr><tr><td>P</td><td>(N-1)x5,0</td></tr></table> N=Number of poles <table><tr><th colspan="2">Poles</th><th colspan="2">Tolerance</th></tr><tr><th></th><th></th><th>DIM L</th><th>DIM P</th></tr><tr><td>2p-6p</td><td></td><td>±0.20</td><td>±0.15</td></tr><tr><td>7p-12p</td><td></td><td>±0.25</td><td>±0.20</td></tr><tr><td>13p-18p</td><td></td><td>±0.30</td><td>±0.25</td></tr><tr><td>19p-24p</td><td></td><td>±0.40</td><td>±0.30</td></tr></table>							L	Nx5,0	P	(N-1)x5,0	Poles		Tolerance				DIM L	DIM P	2p-6p		±0.20	±0.15	7p-12p		±0.25	±0.20	13p-18p		±0.30	±0.25	19p-24p		±0.40	±0.30	F																																																	
L	Nx5,0																																																																																				
P	(N-1)x5,0																																																																																				
Poles		Tolerance																																																																																			
		DIM L	DIM P																																																																																		
2p-6p		±0.20	±0.15																																																																																		
7p-12p		±0.25	±0.20																																																																																		
13p-18p		±0.30	±0.25																																																																																		
19p-24p		±0.40	±0.30																																																																																		
G	RoHS compliant <table><tr><td>Scale</td><td>1:1</td><td></td><td></td><td></td><td></td><td>Date</td><td>Name</td><td colspan="2">Customer-No.</td></tr><tr><td>TOLERANCE</td><td></td><td></td><td></td><td></td><td></td><td>Drawn</td><td>19.04.2010</td><td>Alex</td><td rowspan="4">ASSMANN WSW-No. A-TB500-TQxxSB</td></tr><tr><td>X.</td><td>±0.50</td><td></td><td></td><td></td><td></td><td rowspan="3">Approved</td><td rowspan="7">19.04.2010</td><td colspan="2" rowspan="3">Hellwig</td></tr><tr><td>X.X</td><td>±0.30</td><td></td><td></td><td></td><td></td></tr><tr><td>X.XX</td><td>±0.10</td><td></td><td></td><td></td><td></td></tr><tr><td>DIM</td><td>TOL</td><td></td><td></td><td></td><td></td><td colspan="3" rowspan="3"></td><td rowspan="3">Drawing-No. ASS 4094 CO</td><td rowspan="3">rev00</td></tr><tr><td>X.°</td><td>±1°</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td>Ⓘ</td><td>Drawn</td><td>19.04.2010</td><td>Alex</td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td colspan="3"></td><td>Replace</td><td>Sheet</td><td>H</td></tr></table>							Scale	1:1					Date	Name	Customer-No.		TOLERANCE						Drawn	19.04.2010	Alex	ASSMANN WSW-No. A-TB500-TQxxSB	X.	±0.50					Approved	19.04.2010	Hellwig		X.X	±0.30					X.XX	±0.10					DIM	TOL								Drawing-No. ASS 4094 CO	rev00	X.°	±1°							Ⓘ	Drawn	19.04.2010	Alex	Angle	TOL	Id.	Modification	Date	Name				Replace	Sheet	H	G
Scale	1:1					Date	Name	Customer-No.																																																																													
TOLERANCE						Drawn	19.04.2010	Alex	ASSMANN WSW-No. A-TB500-TQxxSB																																																																												
X.	±0.50					Approved	19.04.2010	Hellwig																																																																													
X.X	±0.30																																																																																				
X.XX	±0.10																																																																																				
DIM	TOL								Drawing-No. ASS 4094 CO	rev00																																																																											
X.°	±1°																																																																																				
		Ⓘ	Drawn	19.04.2010	Alex																																																																																
Angle	TOL	Id.	Modification	Date	Name				Replace	Sheet	H																																																																										
H								H																																																																													
	1	2	3	4	5	6	7																																																																														