

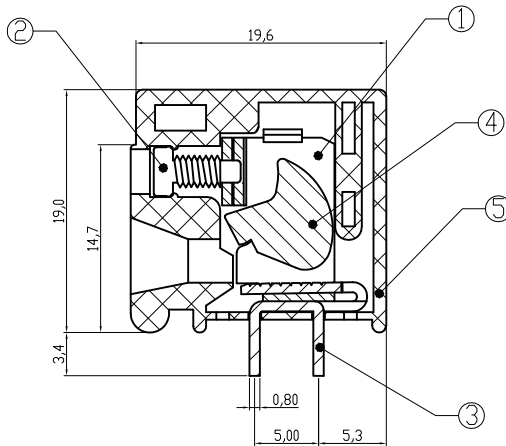
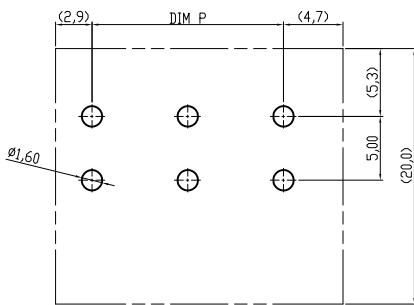


	1	2	3	4	5	6	7																																																																																							
A	Material ①Terminal body(metal housing): steel stamped Zinc plating ②Terminal screw: Steel Zinc plating "-" slot type ③Contacts: Brass,Tin plated ④Firm wire chunk: steel Zinc plating ⑤Insulator (housing): Thermoplastic (UL94V-0) , GREEN Electrical cULus Voltage rating: 300VAC Current rating: 20A Wire range: Solid wire(AWG): 12-22 Stranded wire(AWG): 12-22 Torque(Lb-In): 2.4 Screw: M2.5 Wire strip length: 10-11mm Withstanding Voltage: 1.6KV Operating temperature: -40°C to +115°C Soldering temperature: 250°C±10°C/5 Sec Safety Approval: 							A																																																																																						
B								B																																																																																						
C								C																																																																																						
D								D																																																																																						
E								E																																																																																						
F	RECOMMENDER PCB LAYOUT RoHS compliant <table><tr><td>Scale</td><td>1:1</td><td></td><td></td><td></td><td></td><td></td><td>Date</td><td>Name</td><td colspan="2">Customer-No.</td></tr><tr><td>TOLERANCE</td><td></td><td></td><td></td><td></td><td></td><td>Drawn</td><td>19.04.2010</td><td>Alex</td><td colspan="2" rowspan="4">ASSMANN WSW-No. A-TB750-TRxxH</td></tr><tr><td>X.</td><td>±0.50</td><td></td><td></td><td></td><td></td><td rowspan="3">Approved</td><td rowspan="3">19.04.2010</td><td colspan="3" rowspan="3">Hellwig</td></tr><tr><td>X.X</td><td>±0.30</td><td></td><td></td><td></td><td></td></tr><tr><td>X.XX</td><td>±0.10</td><td></td><td></td><td></td><td></td></tr><tr><td>DIM</td><td>TOL</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td colspan="2">Drawing-No.</td></tr><tr><td>X.°</td><td>±1°</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td colspan="2" rowspan="2">ASS 4096 CO</td></tr><tr><td></td><td></td><td>①</td><td>Drawn</td><td>19.04.2010</td><td>Alex</td><td colspan="5"></td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td>Replace</td><td>Sheet</td></tr></table>							Scale	1:1						Date	Name	Customer-No.		TOLERANCE						Drawn	19.04.2010	Alex	ASSMANN WSW-No. A-TB750-TRxxH		X.	±0.50					Approved	19.04.2010	Hellwig			X.X	±0.30					X.XX	±0.10					DIM	TOL								Drawing-No.		X.°	±1°								ASS 4096 CO				①	Drawn	19.04.2010	Alex						Angle	TOL	Id.	Modification	Date	Name	Replace	Sheet	F
Scale	1:1						Date	Name	Customer-No.																																																																																					
TOLERANCE						Drawn	19.04.2010	Alex	ASSMANN WSW-No. A-TB750-TRxxH																																																																																					
X.	±0.50					Approved	19.04.2010	Hellwig																																																																																						
X.X	±0.30																																																																																													
X.XX	±0.10																																																																																													
DIM	TOL								Drawing-No.																																																																																					
X.°	±1°								ASS 4096 CO																																																																																					
		①	Drawn	19.04.2010	Alex																																																																																									
Angle	TOL	Id.	Modification	Date	Name	Replace	Sheet																																																																																							
G	ASSMANN WSW components							G																																																																																						
H	ASSMANN WSW components							H																																																																																						
	1	2	3	4	5	6	7																																																																																							