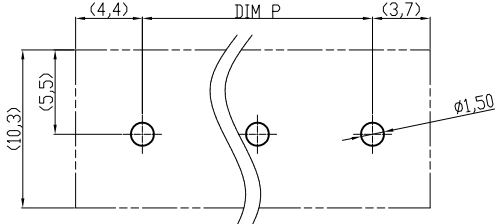
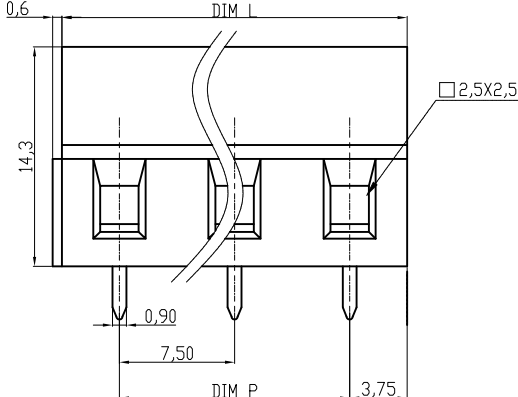
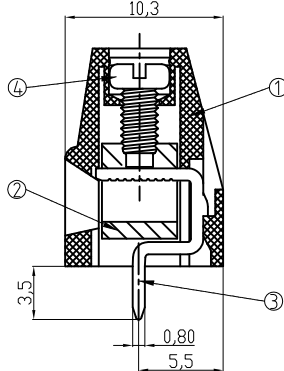


	1	2	3	4	5	6	7	
A	Material ①Terminal housing: Thermoplastic (UL94V-0) , GREEN ②Clamp: Brass,Ni plated ③Wire guard solder pin: Brass,Tin plated ④Terminal screw: Steel Zinc plating "-" slot type Electrical UL VDE Voltage rating: 300V 450V Current rating: 10A 10A Wire range: 0.34-4.0mm² Solid wire(AWG): 12-22 Stranded wire(AWG): 12-22 Torque(Lb-In): 3.5Lb-In 0.4 Nm Screw: M2.5 Wire strip length: 6-7mm Withstanding Voltage: 1.6KV 2.5KV Operating temperature: -40°C to +115°C Soldering temperature: 250°C±10°C/5 Sec Safety Approval:    RECOMMENDER PCB LAYOUT							A
B								B
C								C
D	  DIMENSION L Nx7.5 P (N-1)x7.5 N=Number of poles Poles Tolerance DIM L DIM P 2p-4p ±0.20 ±0.20 5p-8p ±0.25 ±0.25 9p-12p ±0.35 ±0.35							D
E								E
F								F
G	RoHS compliant Scale 1:1 TOLERANCE X. ±0.50 X.X ±0.30 X.XX ±0.10 DIM TOL X.° ±1° Angle TOL ① Drawn 19.04.2010 Alex Id. Modification Date Name  Customer-No. ASSMANN WSW-No. A-TB750-Tlxx Drawing-No. ASS 4105 CO rev00 Replace Sheet							G
H								H
	1	2	3	4	5	6	7	