
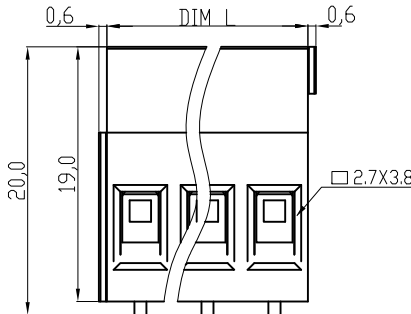
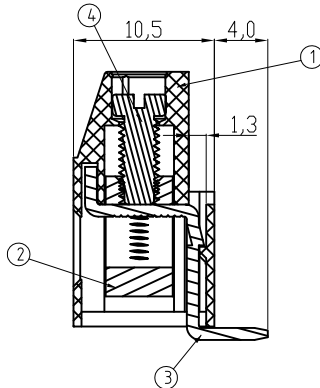
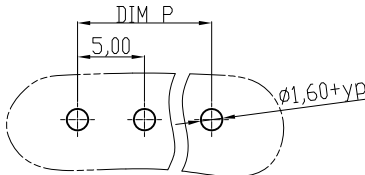


	1	2	3	4	5	6	7																																																																																																			
A	Material ①Terminal housing: Thermoplastic (UL94V-0) , GREEN ②Clamp:Brass,Ni plated ③Wire guard solder pin:Copper,Tin plated ④Terminal screw: Steel, Zinc plating "-" slot type Electrical cULus Voltage rating: 300VAC Current rating: 20A Wire range: Solid wire(AWG): 12-30 Stranded wire(AWG): 12-30 Torque(Lb-In): 3.5 Screw: M3 Wire strip length: 6-7mm Withstanding Voltage: 1.6KV Operating temperature: -40°C to +115°C Soldering temperature: 250°C±10°C/5 Sec Safety Approval: 							A																																																																																																		
B								B																																																																																																		
C								C																																																																																																		
D								D																																																																																																		
E								E																																																																																																		
F	 DIMENSION <table><tr><td>L</td><td>Nx5,0</td></tr><tr><td>P</td><td>(N-1)x5.0</td></tr></table> N=Number of poles <table><tr><th>Poles</th><th>Tolerance</th></tr><tr><td></td><td>DIM L&DIM P</td></tr><tr><td>2p-8p</td><td>±0.15</td></tr><tr><td>9p-14p</td><td>±0.25</td></tr><tr><td>15p-20p</td><td>±0.35</td></tr><tr><td>21p-24p</td><td>±0.40</td></tr></table>							L	Nx5,0	P	(N-1)x5.0	Poles	Tolerance		DIM L&DIM P	2p-8p	±0.15	9p-14p	±0.25	15p-20p	±0.35	21p-24p	±0.40	F																																																																																		
L	Nx5,0																																																																																																									
P	(N-1)x5.0																																																																																																									
Poles	Tolerance																																																																																																									
	DIM L&DIM P																																																																																																									
2p-8p	±0.15																																																																																																									
9p-14p	±0.25																																																																																																									
15p-20p	±0.35																																																																																																									
21p-24p	±0.40																																																																																																									
G	RECOMMENDER PCB LAYOUT RoHS compliant <table><tr><td>Scale</td><td>1:1</td><td></td><td></td><td></td><td></td><td>Date</td><td>Name</td><td colspan="2">Customer-No.</td></tr><tr><td>TOLERANCE</td><td></td><td></td><td></td><td></td><td></td><td>Drawn</td><td>19.04.2010</td><td>Alex</td><td></td></tr><tr><td>X.</td><td>±0.50</td><td></td><td></td><td></td><td></td><td>Approved</td><td>19.04.2010</td><td>Hellwig</td><td></td></tr><tr><td>X.X</td><td>±0.30</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.XX</td><td>±0.10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>DIM</td><td>TOL</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.°</td><td>±1°</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td>①</td><td>Drawn</td><td>19.04.2010</td><td>Alex</td><td colspan="2" rowspan="2"></td><td colspan="2">ASSMANN WSW-No. A-TB500-VJxxV</td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td>Drawing-No.</td><td>rev00</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>Replace</td><td>Sheet</td></tr></table>							Scale	1:1					Date	Name	Customer-No.		TOLERANCE						Drawn	19.04.2010	Alex		X.	±0.50					Approved	19.04.2010	Hellwig		X.X	±0.30									X.XX	±0.10									DIM	TOL									X.°	±1°											①	Drawn	19.04.2010	Alex			ASSMANN WSW-No. A-TB500-VJxxV		Angle	TOL	Id.	Modification	Date	Name	Drawing-No.	rev00									Replace	Sheet	G
Scale	1:1					Date	Name	Customer-No.																																																																																																		
TOLERANCE						Drawn	19.04.2010	Alex																																																																																																		
X.	±0.50					Approved	19.04.2010	Hellwig																																																																																																		
X.X	±0.30																																																																																																									
X.XX	±0.10																																																																																																									
DIM	TOL																																																																																																									
X.°	±1°																																																																																																									
		①	Drawn	19.04.2010	Alex			ASSMANN WSW-No. A-TB500-VJxxV																																																																																																		
Angle	TOL	Id.	Modification	Date	Name			Drawing-No.	rev00																																																																																																	
								Replace	Sheet																																																																																																	
H								H																																																																																																		
	1	2	3	4	5	6	7																																																																																																			