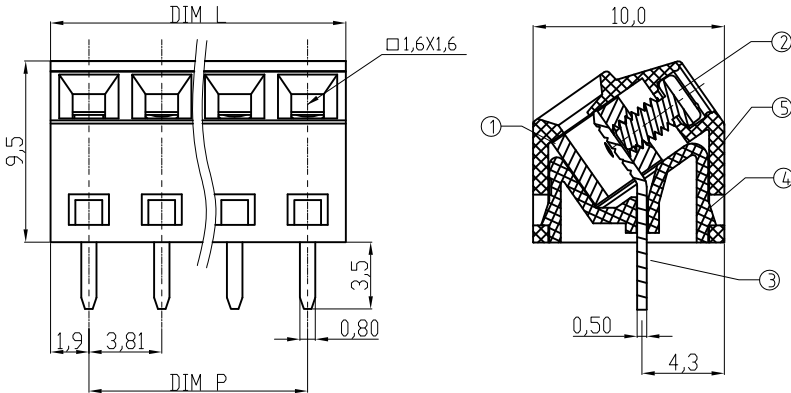
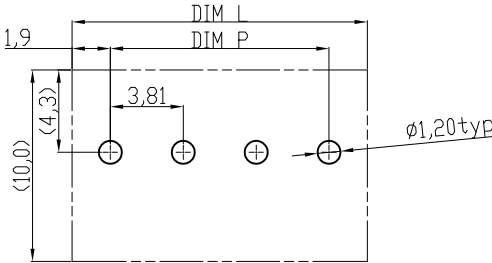


	1	2	3	4	5	6	7																																																																																																			
A	Material ①Clamp:Brass,Ni plated ②Terminal screw: Steel Zinc plating "-" slot type ③Wire guard solder pin: Brass,Tin plated ④Terminal cover:Thermoplastic(UL94V-0) ⑤Terminal(housing): Thermoplastic (UL94V-0) , GREEN Electrical Voltage rating: 300VAC Current rating: 10A Wire range: Solid wire(AWG): 16-28 Stranded wire(AWG): 16-28 Torque(Lb-In): 1.7 Screw: M2 Wire strip length: 5-6mm Withstanding Voltage: 1.6KV Operating temperature: -40°C to +115°C Soldering temperature: 250°C±10°C/5 Sec Safety Approval: us							A																																																																																																		
B								B																																																																																																		
C								C																																																																																																		
D								D																																																																																																		
E								E																																																																																																		
F	RECOMMENDER PCB LAYOUT RoHS compliant <table><tr><td>Scale</td><td>1:1</td><td></td><td></td><td></td><td></td><td>Date</td><td>Name</td><td colspan="2">Customer-No.</td></tr><tr><td>TOLERANCE</td><td></td><td></td><td></td><td></td><td></td><td>Drawn</td><td>19.04.2010</td><td>Alex</td><td></td></tr><tr><td>X.</td><td>±0.50</td><td></td><td></td><td></td><td></td><td>Approved</td><td>19.04.2010</td><td>Hellwig</td><td></td></tr><tr><td>X.X</td><td>±0.30</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.XX</td><td>±0.10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>DIM</td><td>TOL</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.°</td><td>±1°</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td>①</td><td>Drawn</td><td>19.04.2010</td><td>Alex</td><td rowspan="2"></td><td colspan="2">Drawing-No.</td><td></td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td>ASS 4114 CO</td><td>rev00</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td colspan="2" rowspan="2">Replace</td><td colspan="2">Sheet</td></tr></table>							Scale	1:1					Date	Name	Customer-No.		TOLERANCE						Drawn	19.04.2010	Alex		X.	±0.50					Approved	19.04.2010	Hellwig		X.X	±0.30									X.XX	±0.10									DIM	TOL									X.°	±1°											①	Drawn	19.04.2010	Alex		Drawing-No.			Angle	TOL	Id.	Modification	Date	Name	ASS 4114 CO	rev00							Replace		Sheet		F
Scale	1:1					Date	Name	Customer-No.																																																																																																		
TOLERANCE						Drawn	19.04.2010	Alex																																																																																																		
X.	±0.50					Approved	19.04.2010	Hellwig																																																																																																		
X.X	±0.30																																																																																																									
X.XX	±0.10																																																																																																									
DIM	TOL																																																																																																									
X.°	±1°																																																																																																									
		①	Drawn	19.04.2010	Alex		Drawing-No.																																																																																																			
Angle	TOL	Id.	Modification	Date	Name		ASS 4114 CO	rev00																																																																																																		
						Replace		Sheet																																																																																																		
G								G																																																																																																		
H								H																																																																																																		
	1	2	3	4	5	6	7																																																																																																			