
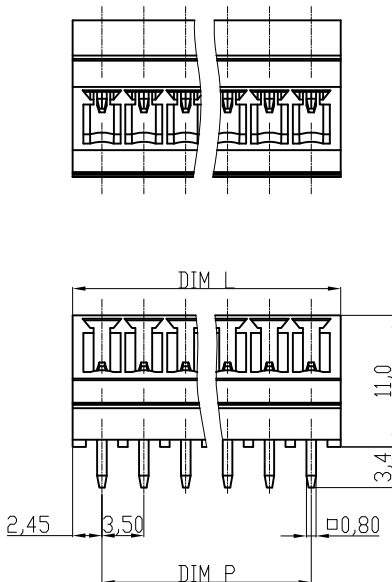
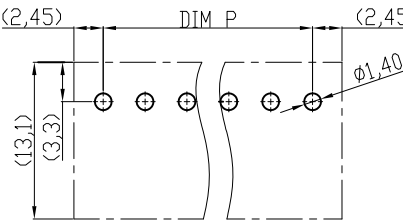


	1	2	3	4	5	6	7																																																																																																					
A	Material Item a Male contact pin:Copper Tin plated Item b Terminal (housing): Thermoplastic (UL94V-0) , GREEN Electrical cULus/VDE Voltage rating:300V/300V Current rating:8A/10A Withstanding Voltage:1.6KV/2.5KV Operating temperature:-40°C to +115°C Soldering temperature:250°C±10°C/5 Sec Safety Approval: cULus    DIMENSION<table><tr><td>L</td><td>(N-1)x3.5+4.9</td></tr><tr><td>P</td><td>(N-1)x3.5</td></tr></table> N=Number of poles <table><tr><th>Poles</th><th colspan="2">Tolerance</th></tr><tr><th></th><th>DIM L</th><th>DIM P</th></tr><tr><td>2p-6p</td><td>±0.15</td><td>±0.15</td></tr><tr><td>7p-12p</td><td>±0.20</td><td>±0.20</td></tr><tr><td>13p-18p</td><td>±0.25</td><td>±0.25</td></tr><tr><td>19p-24p</td><td>±0.30</td><td>±0.30</td></tr></table> RECOMMENDER PCB LAYOUT <table><tr><td>Scale</td><td>1:1</td><td></td><td></td><td></td><td></td><td>Date</td><td>Name</td><td>Customer-No.</td></tr><tr><td>TOLERANCE</td><td></td><td></td><td></td><td></td><td></td><td>Drawn</td><td>19.04.2010</td><td>Alex</td></tr><tr><td>X.</td><td>±0.50</td><td></td><td></td><td></td><td></td><td>Approved</td><td>19.04.2010</td><td>Hellwig</td></tr><tr><td>X.X</td><td>±0.30</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.XX</td><td>±0.10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>DIM</td><td>TOL</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.°</td><td>±1°</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td>Ⓢ</td><td>Drawn</td><td>19.04.2010</td><td>Alex</td><td colspan="3" rowspan="2">  </td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td></tr></table> RoHS compliant							L	(N-1)x3.5+4.9	P	(N-1)x3.5	Poles	Tolerance			DIM L	DIM P	2p-6p	±0.15	±0.15	7p-12p	±0.20	±0.20	13p-18p	±0.25	±0.25	19p-24p	±0.30	±0.30	Scale	1:1					Date	Name	Customer-No.	TOLERANCE						Drawn	19.04.2010	Alex	X.	±0.50					Approved	19.04.2010	Hellwig	X.X	±0.30								X.XX	±0.10								DIM	TOL								X.°	±1°										Ⓢ	Drawn	19.04.2010	Alex				Angle	TOL	Id.	Modification	Date	Name	A
L	(N-1)x3.5+4.9																																																																																																											
P	(N-1)x3.5																																																																																																											
Poles	Tolerance																																																																																																											
	DIM L	DIM P																																																																																																										
2p-6p	±0.15	±0.15																																																																																																										
7p-12p	±0.20	±0.20																																																																																																										
13p-18p	±0.25	±0.25																																																																																																										
19p-24p	±0.30	±0.30																																																																																																										
Scale	1:1					Date	Name	Customer-No.																																																																																																				
TOLERANCE						Drawn	19.04.2010	Alex																																																																																																				
X.	±0.50					Approved	19.04.2010	Hellwig																																																																																																				
X.X	±0.30																																																																																																											
X.XX	±0.10																																																																																																											
DIM	TOL																																																																																																											
X.°	±1°																																																																																																											
		Ⓢ	Drawn	19.04.2010	Alex																																																																																																							
Angle	TOL	Id.	Modification	Date	Name																																																																																																							
B								B																																																																																																				
C								C																																																																																																				
D								D																																																																																																				
E								E																																																																																																				
F								F																																																																																																				
G	Scale 1:1 TOLERANCE X. ±0.50 X.X ±0.30 X.XX ±0.10 DIM TOL X.° ±1° Ⓢ Drawn 19.04.2010 Alex Angle TOL Id. Modification Date Name							G																																																																																																				
H	ASSMANN components ASS 4118 CO rev00 Replace Sheet							H																																																																																																				
	1	2	3	4	5	6	7																																																																																																					