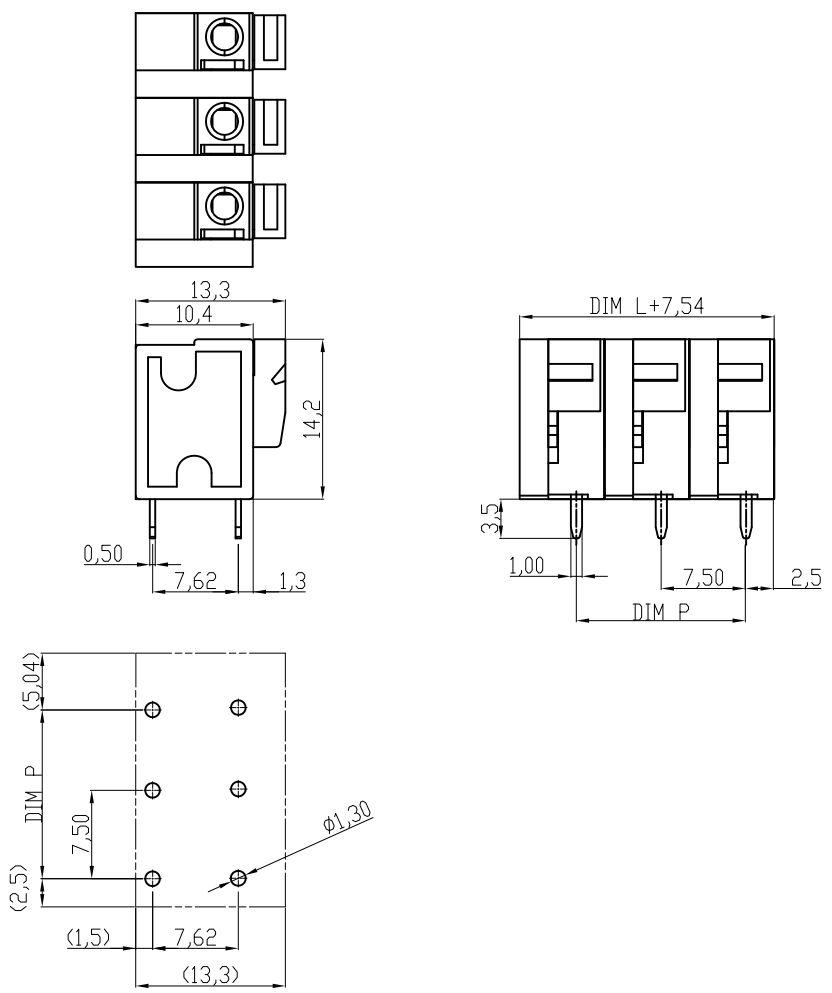

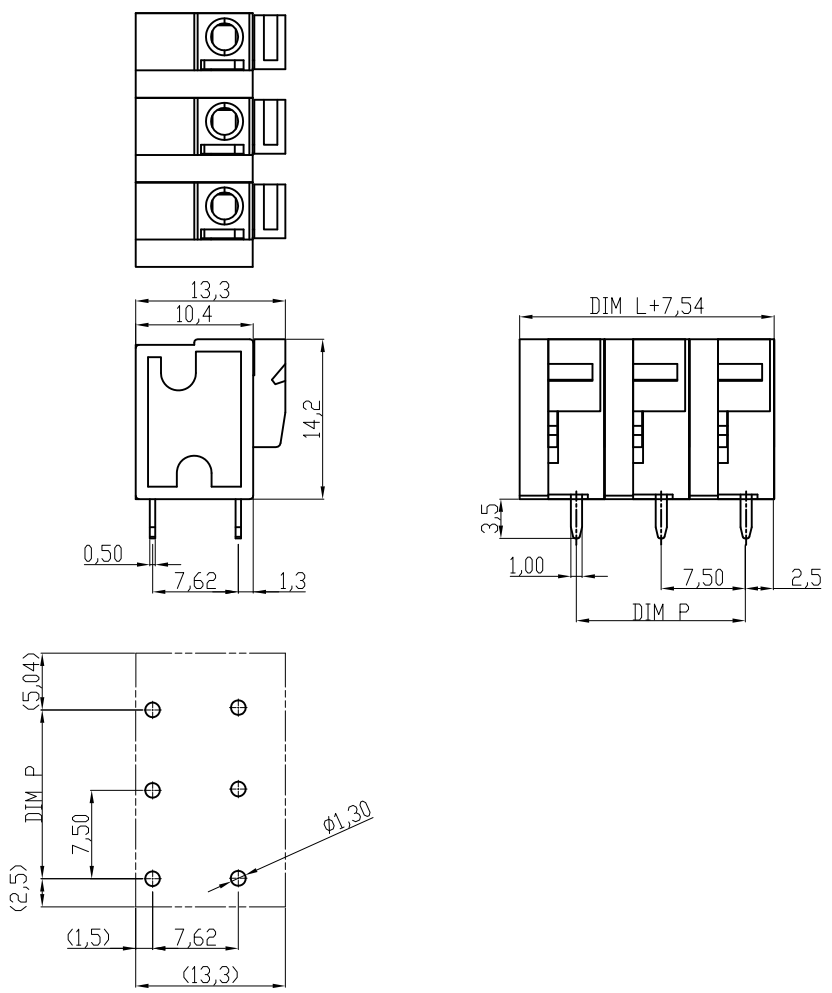
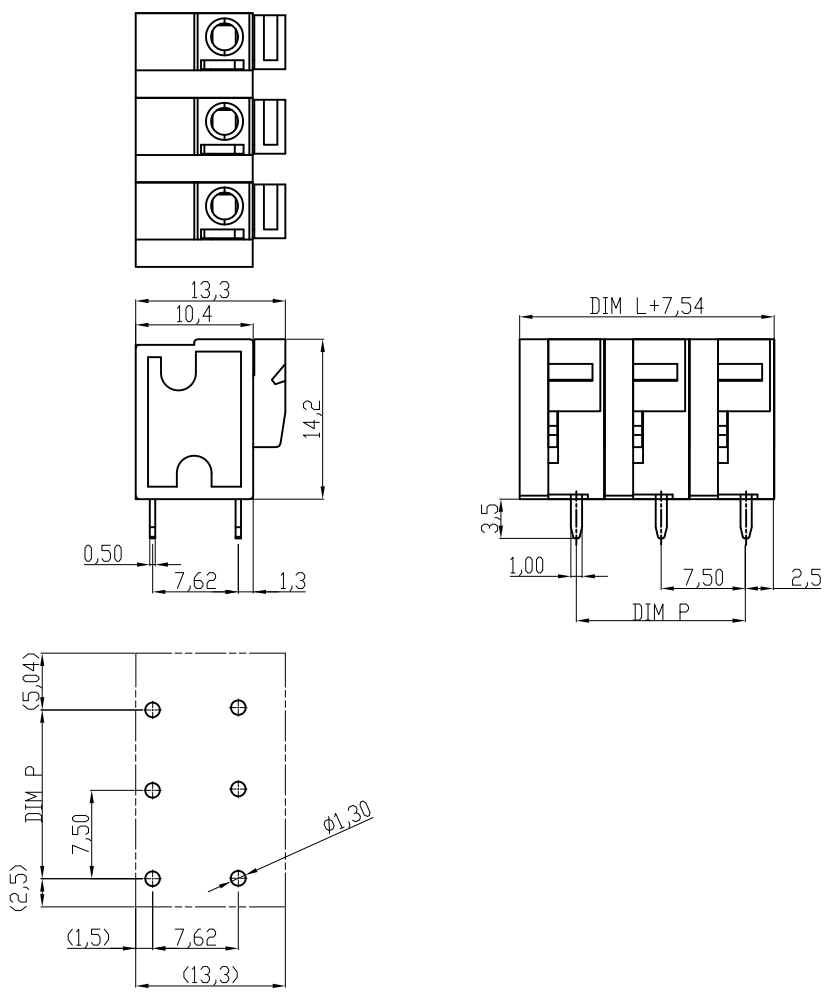
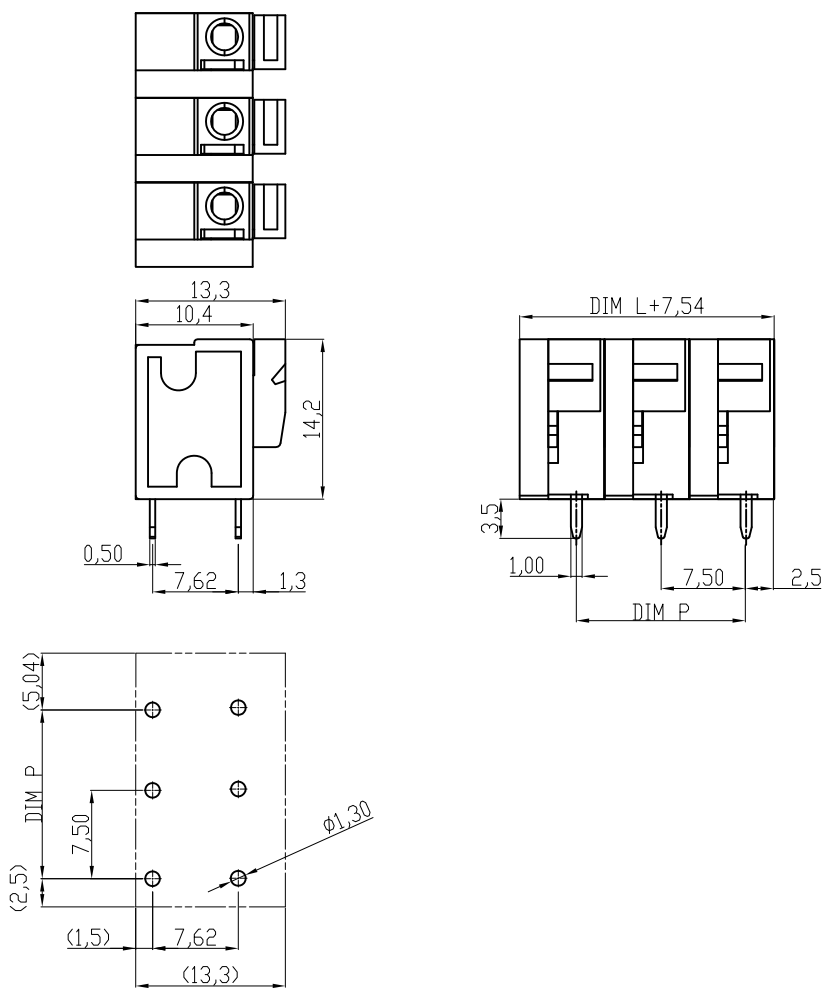
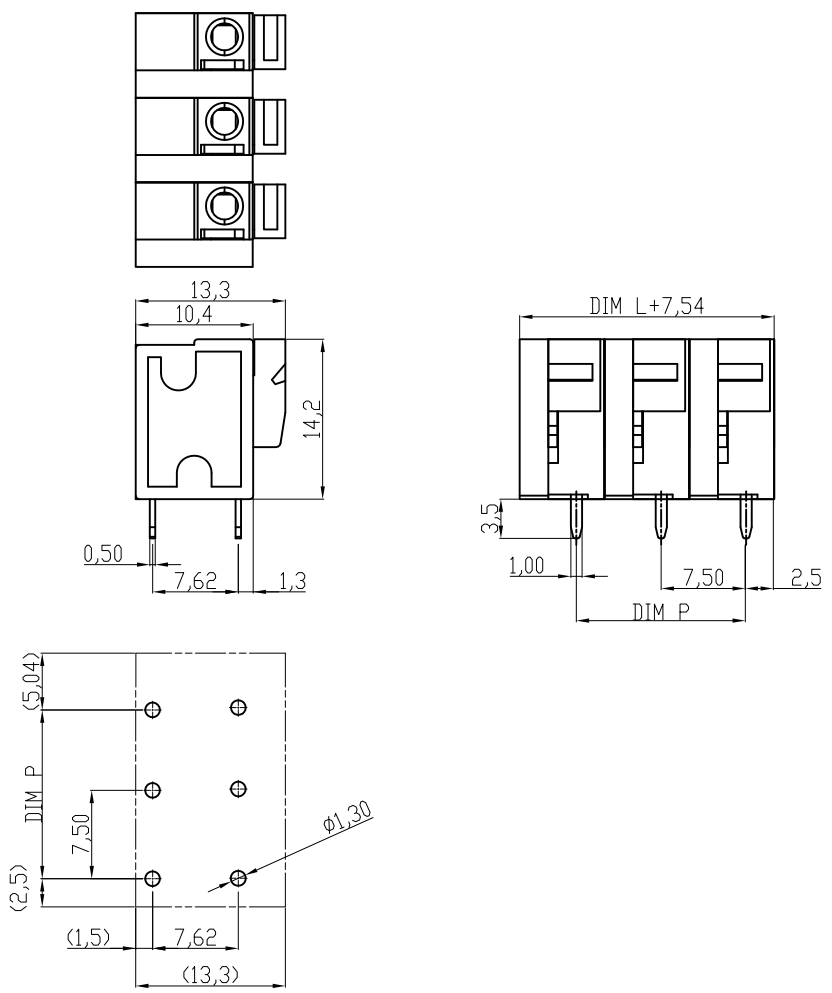
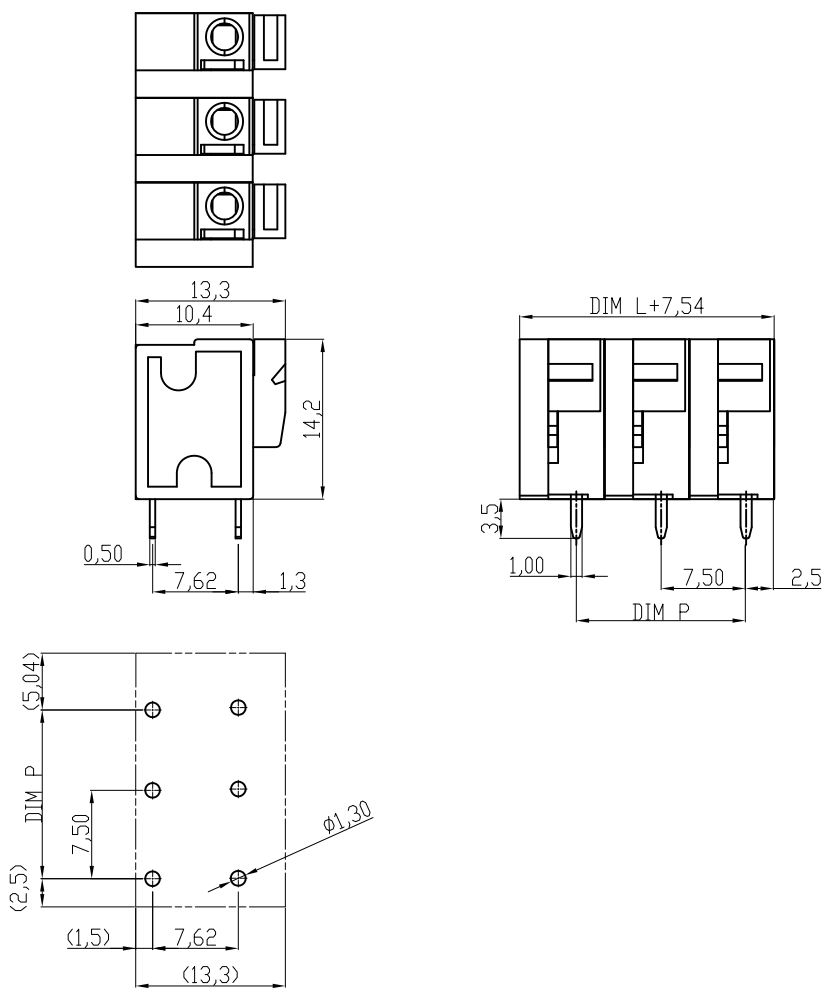
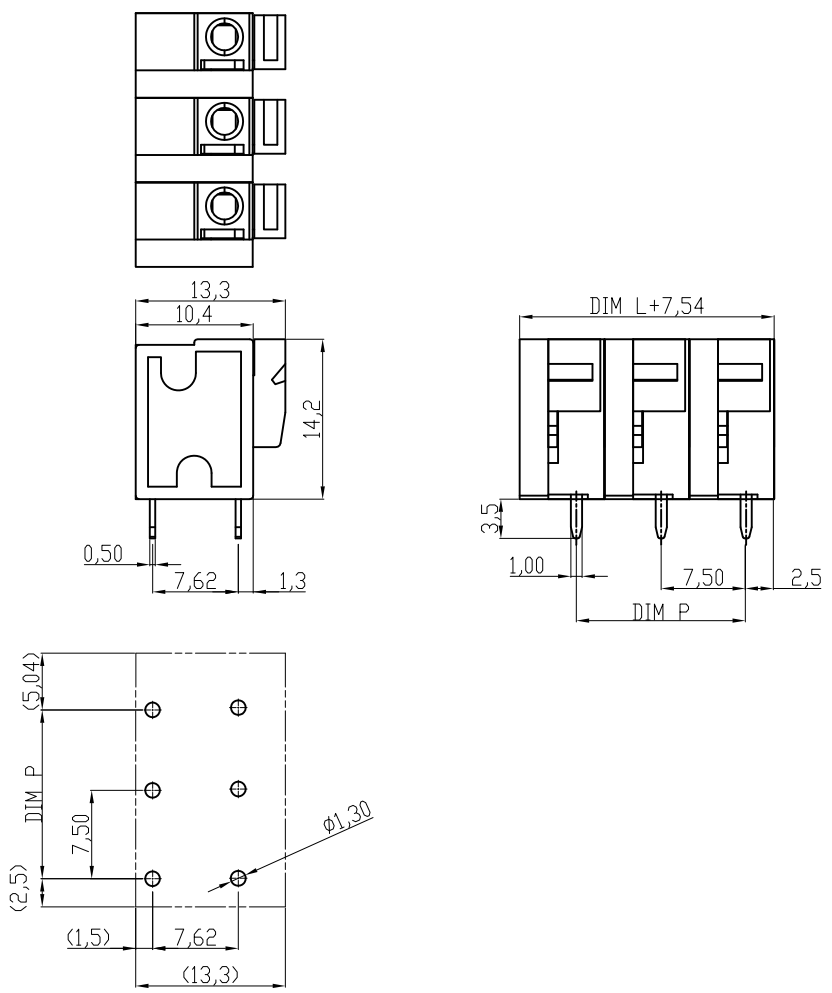
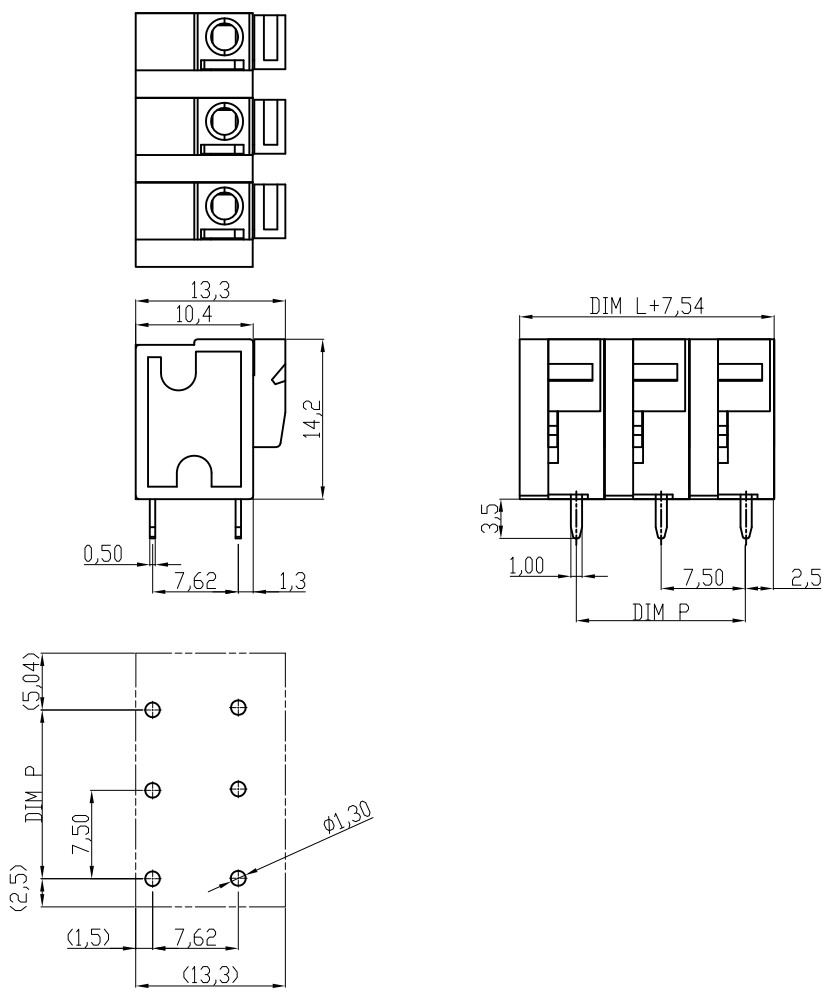
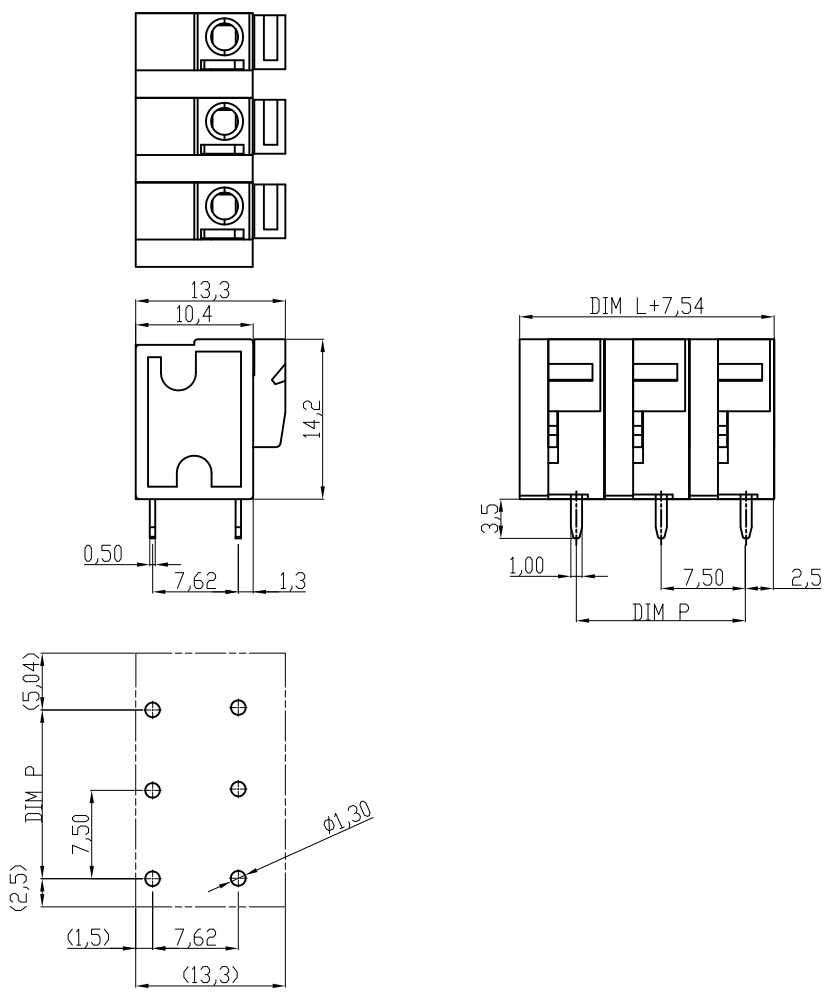
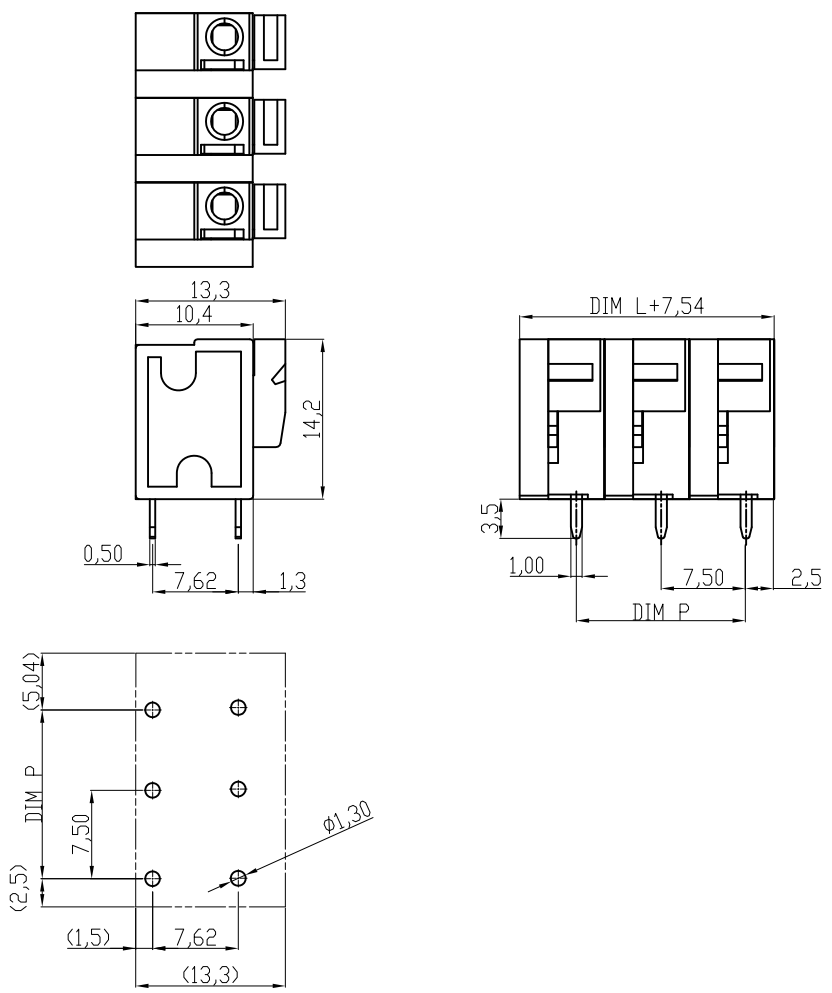
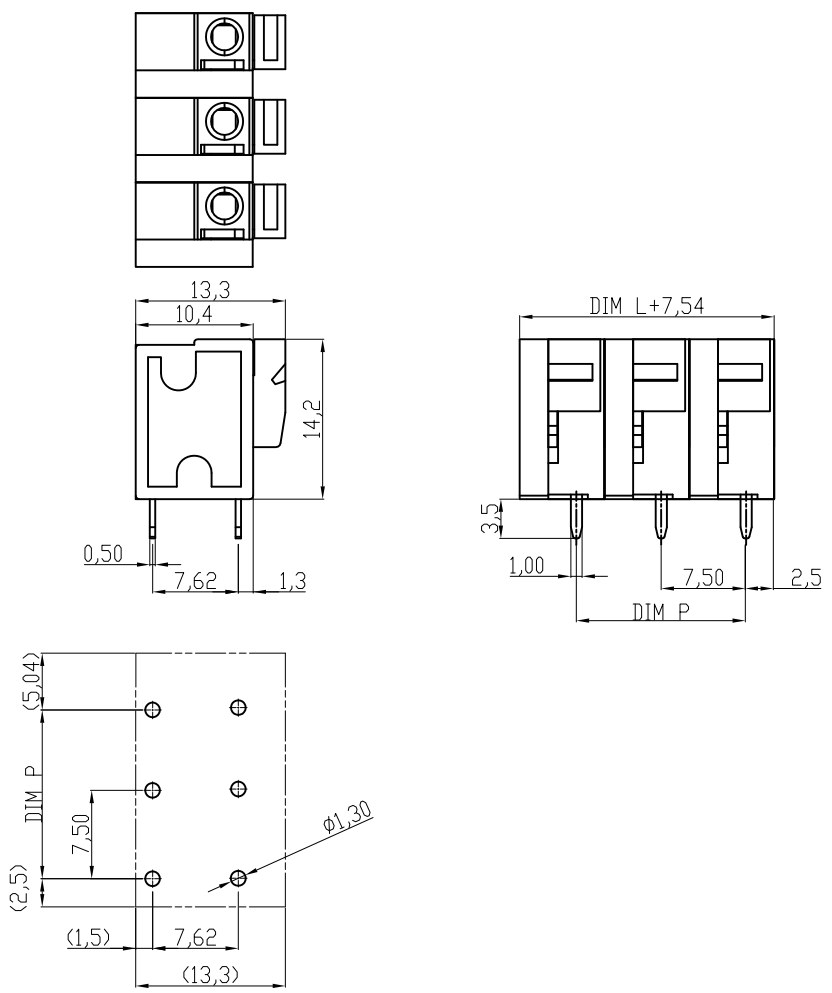
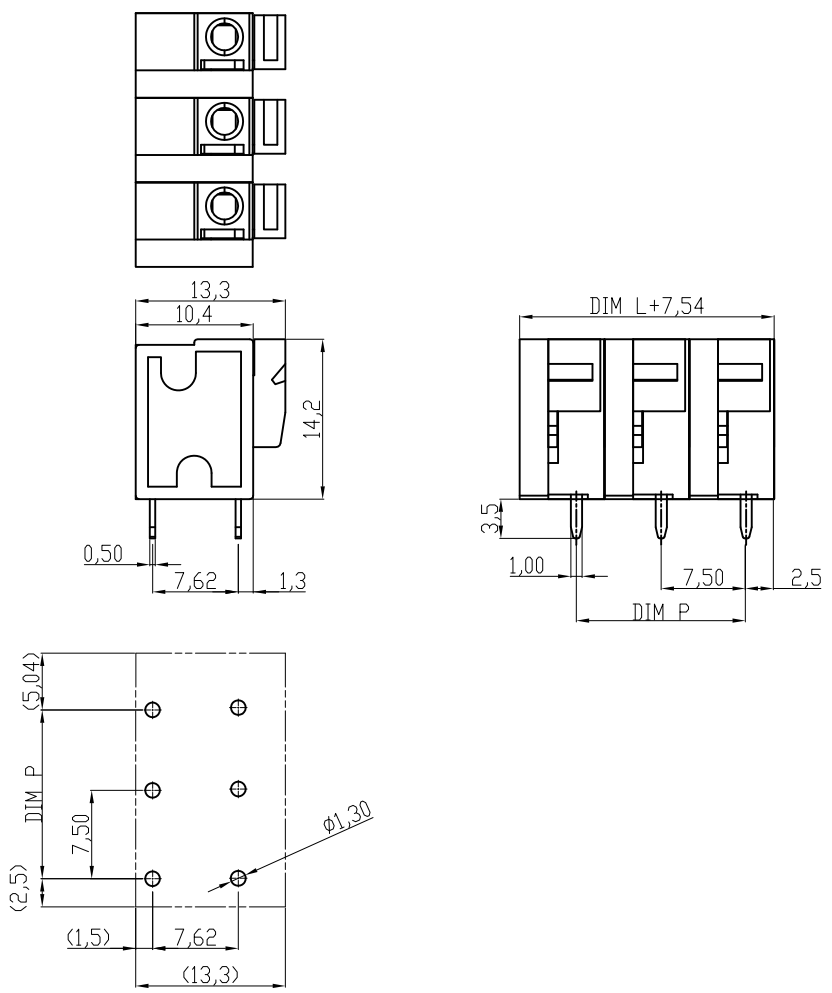
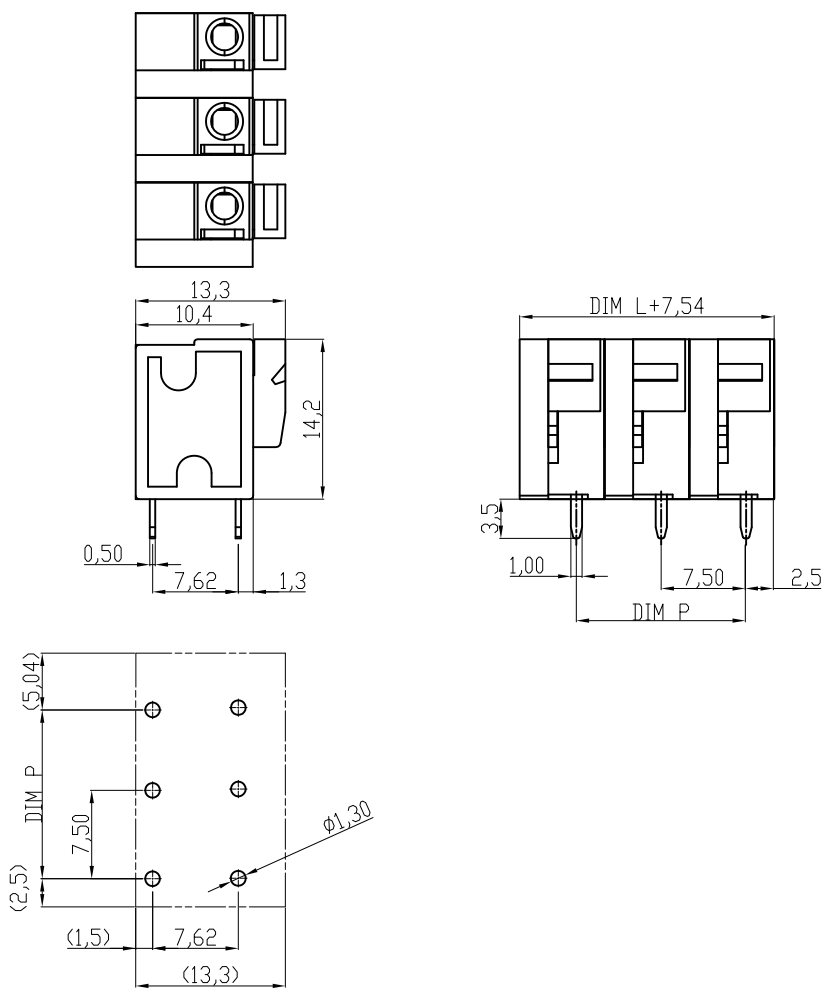
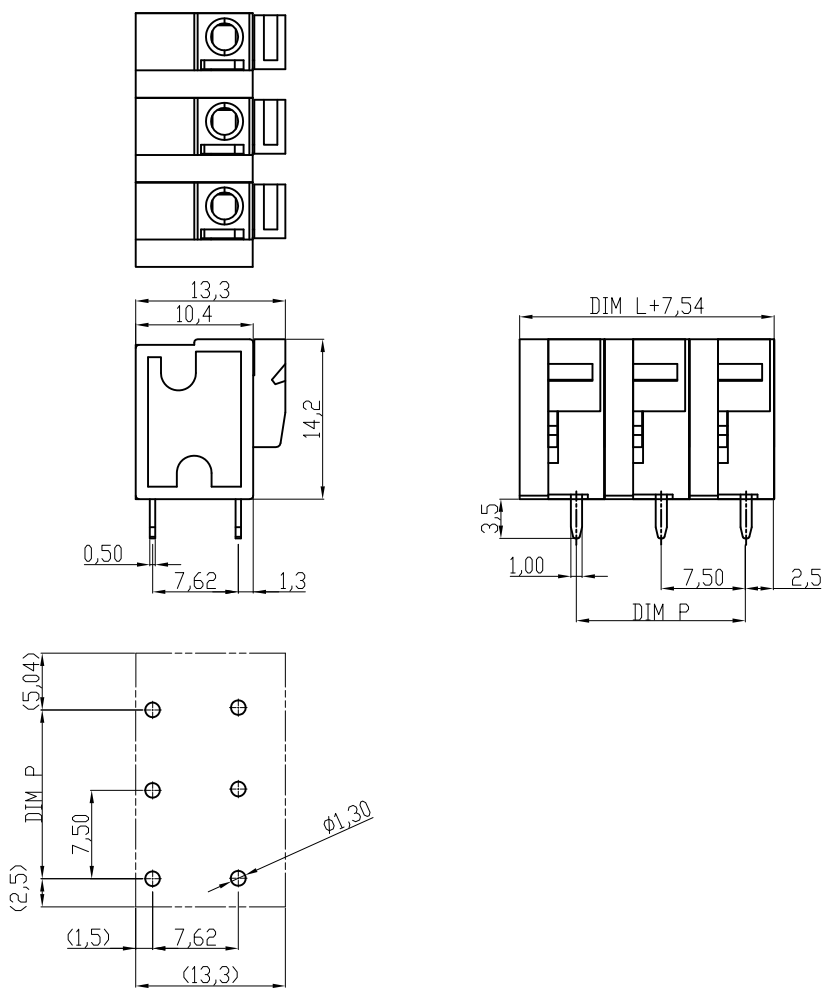
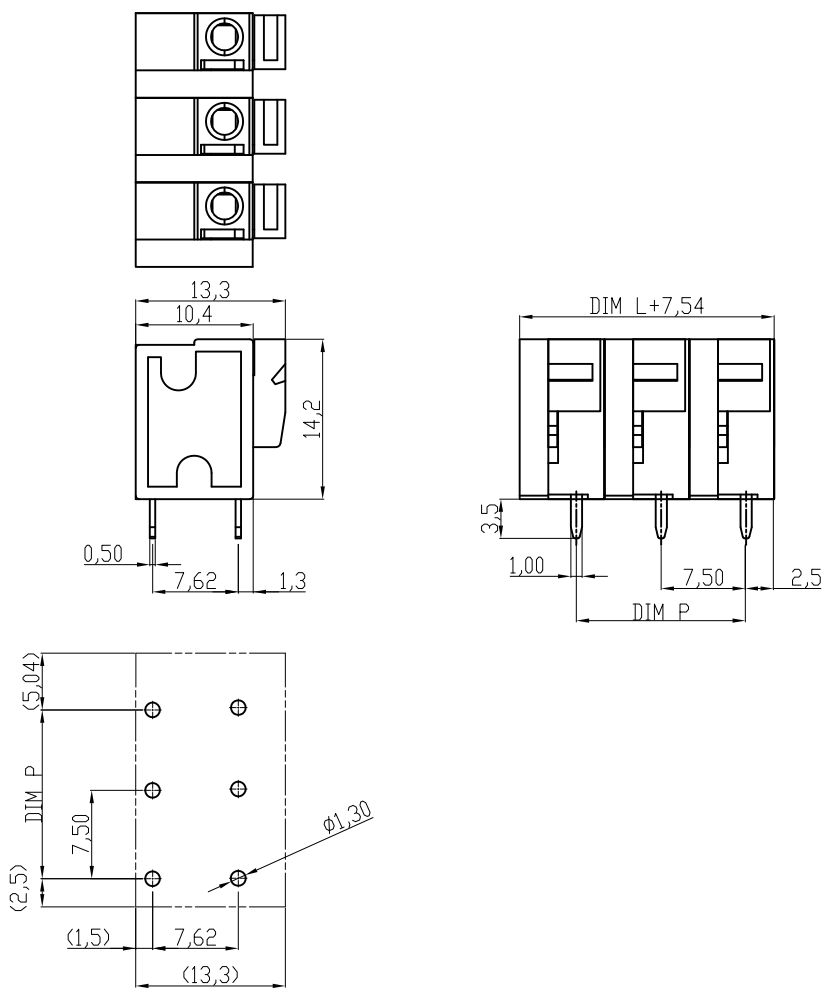
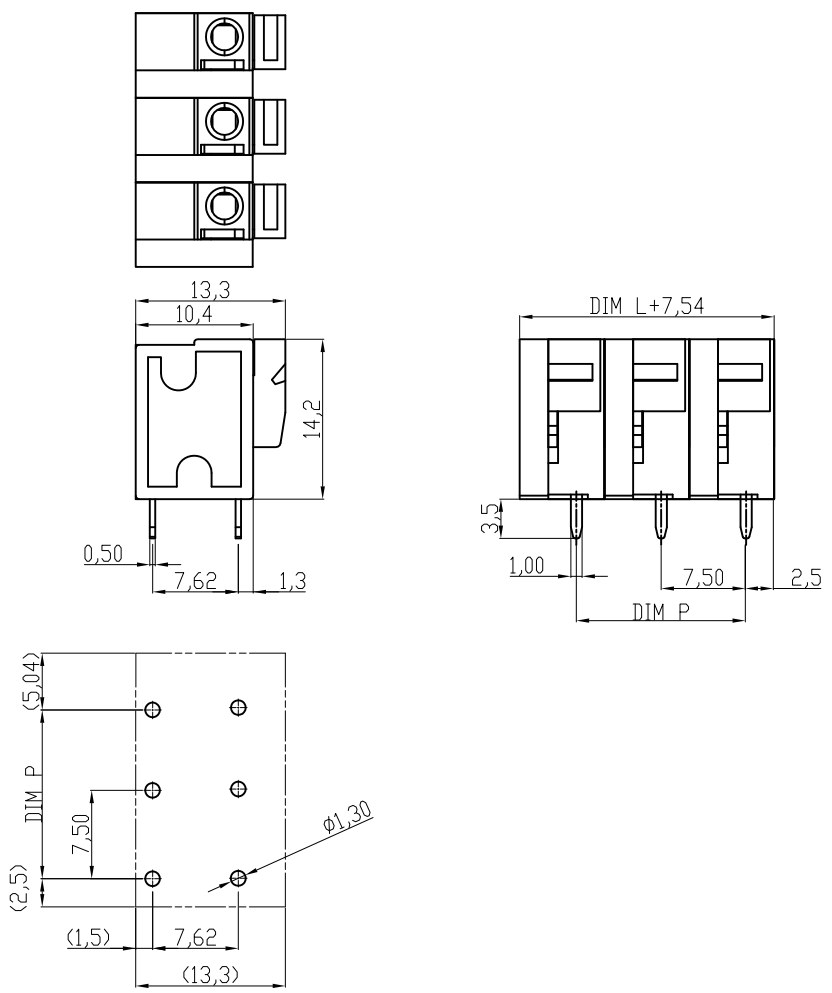
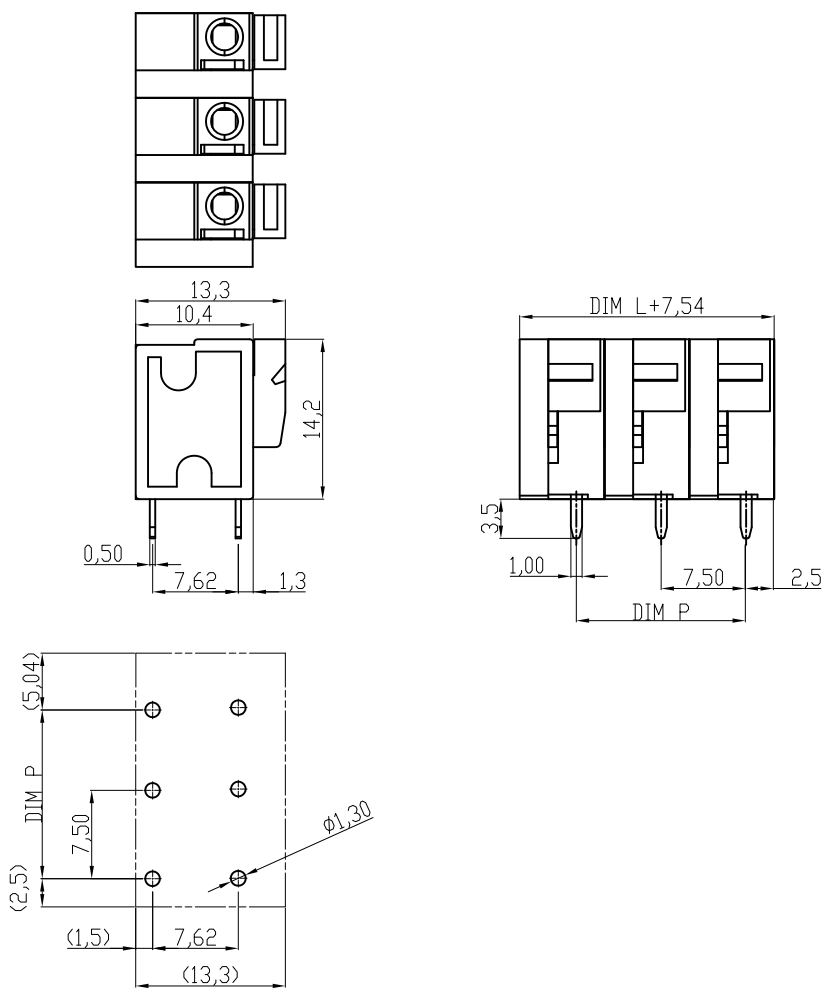
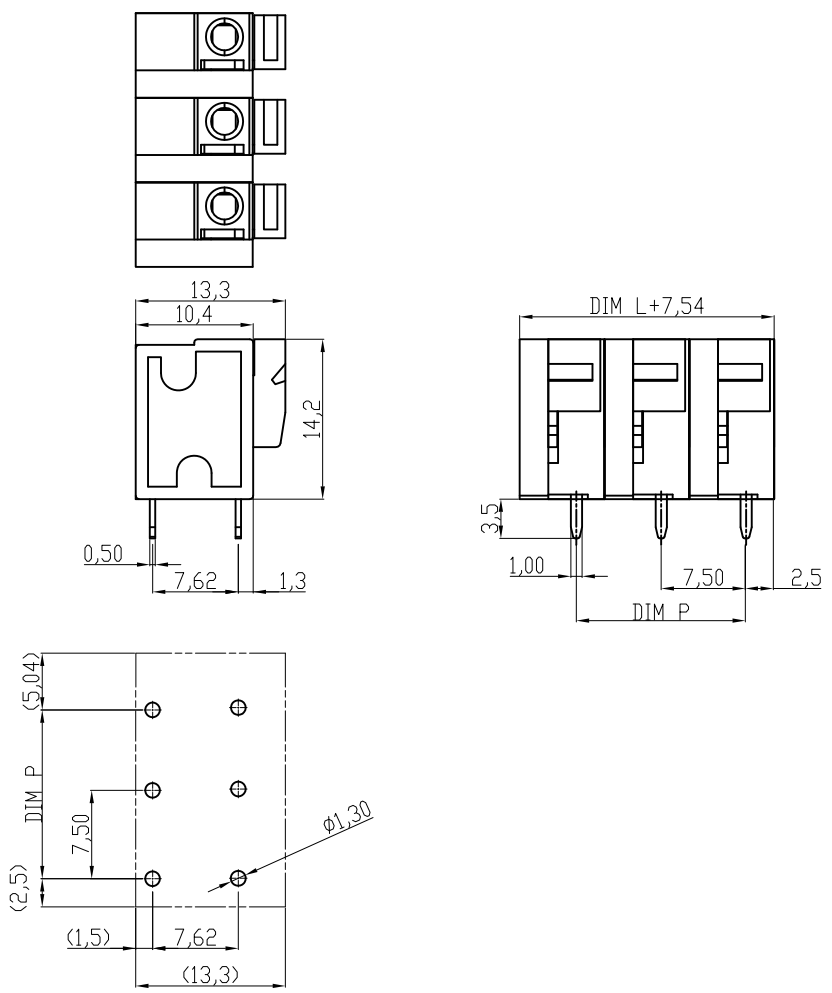
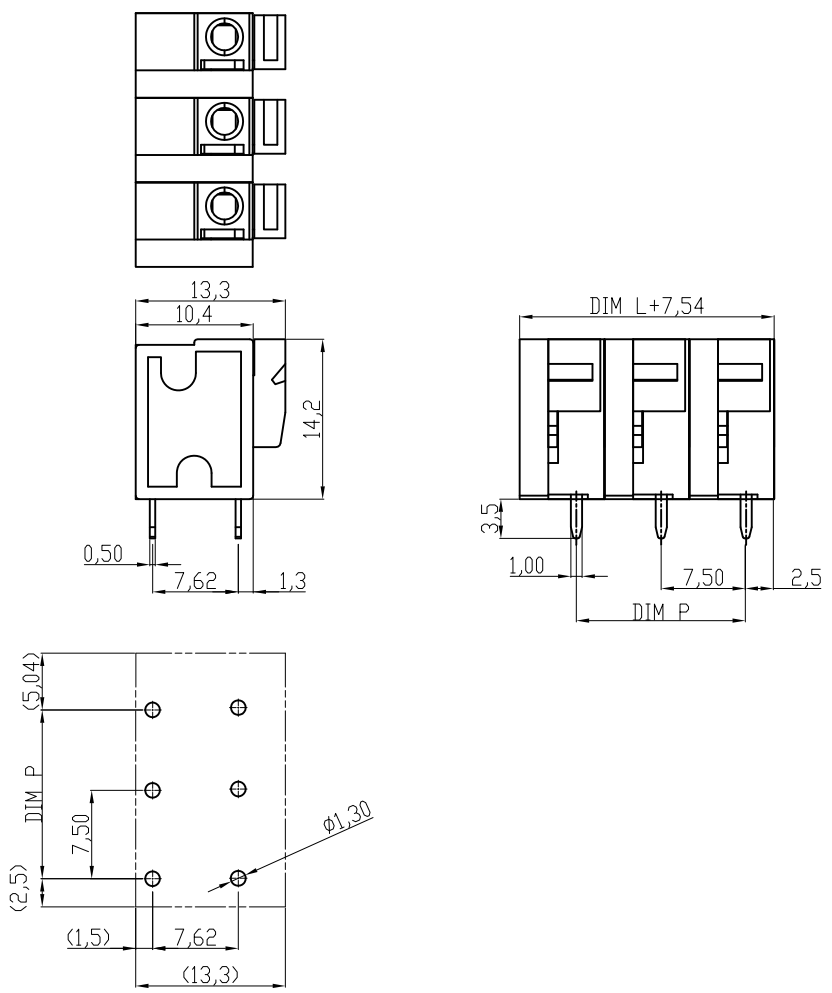
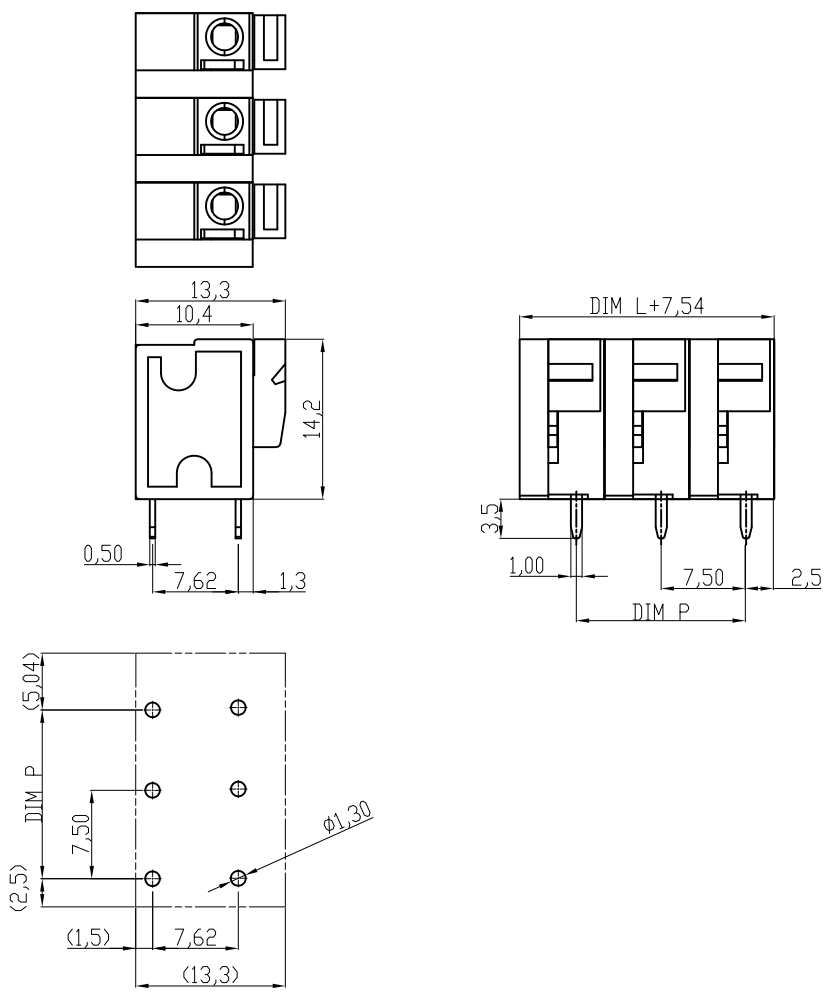
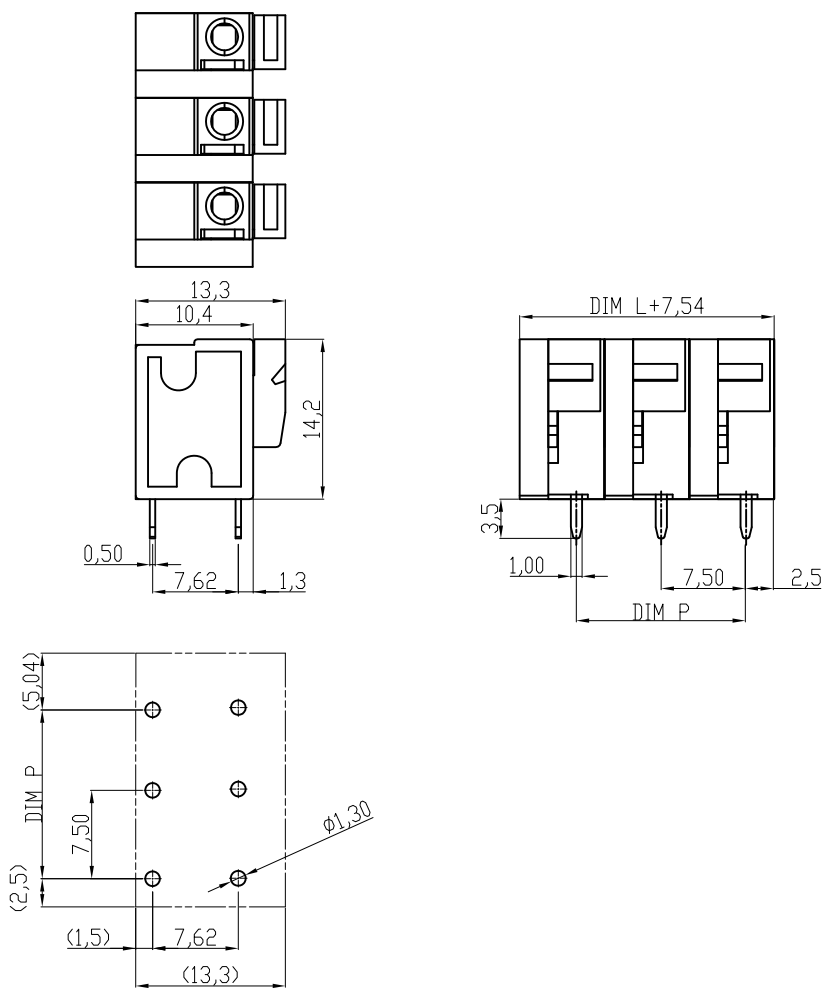
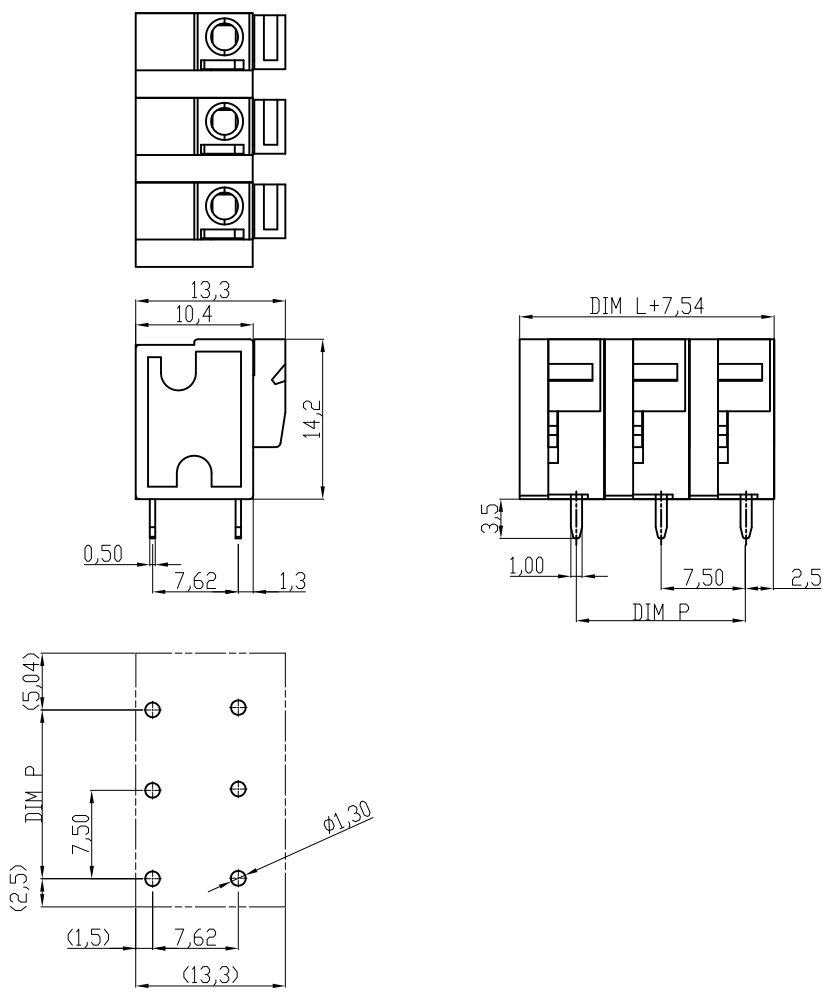
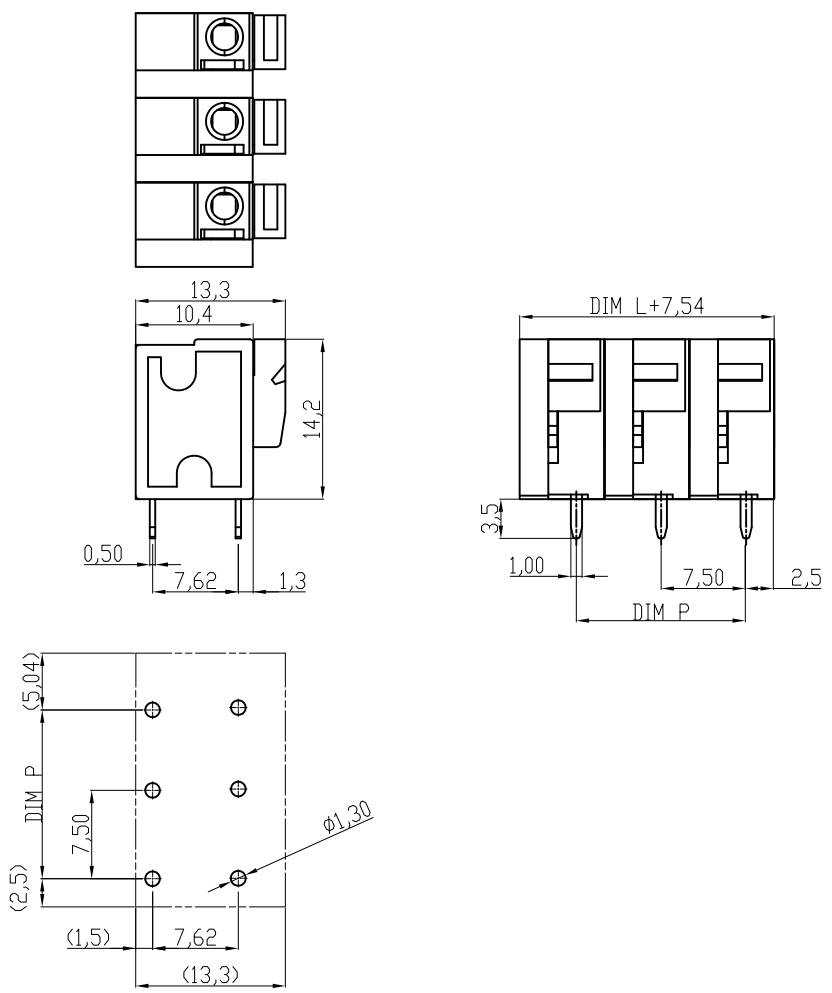
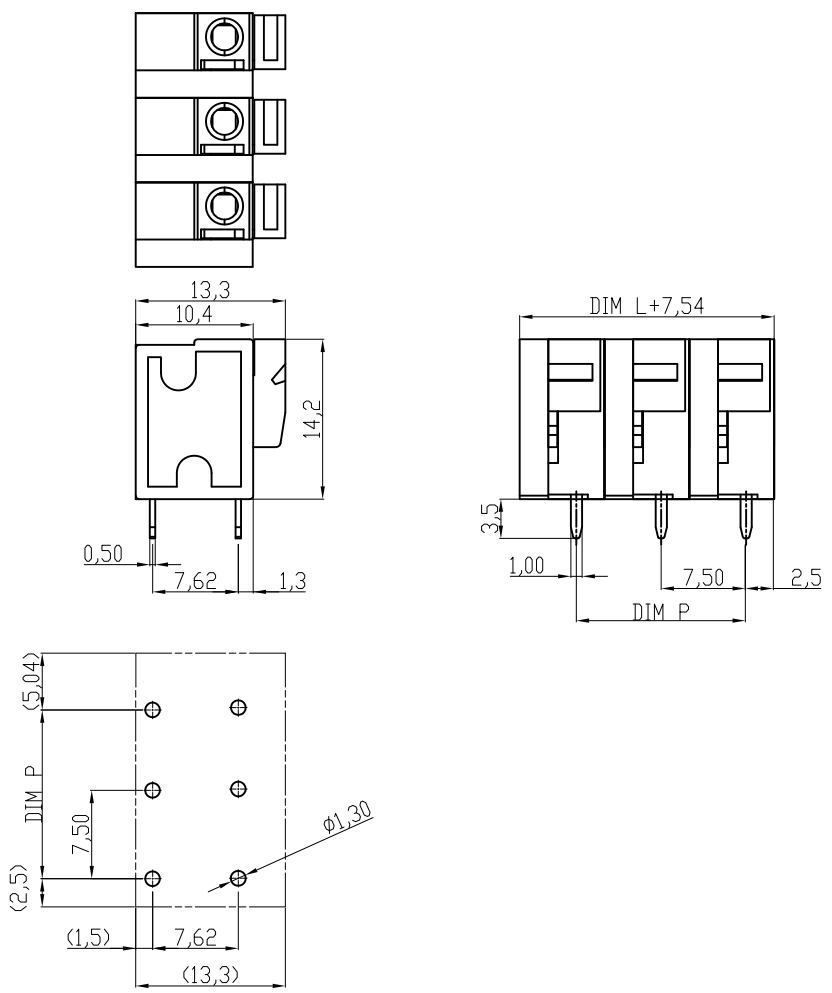
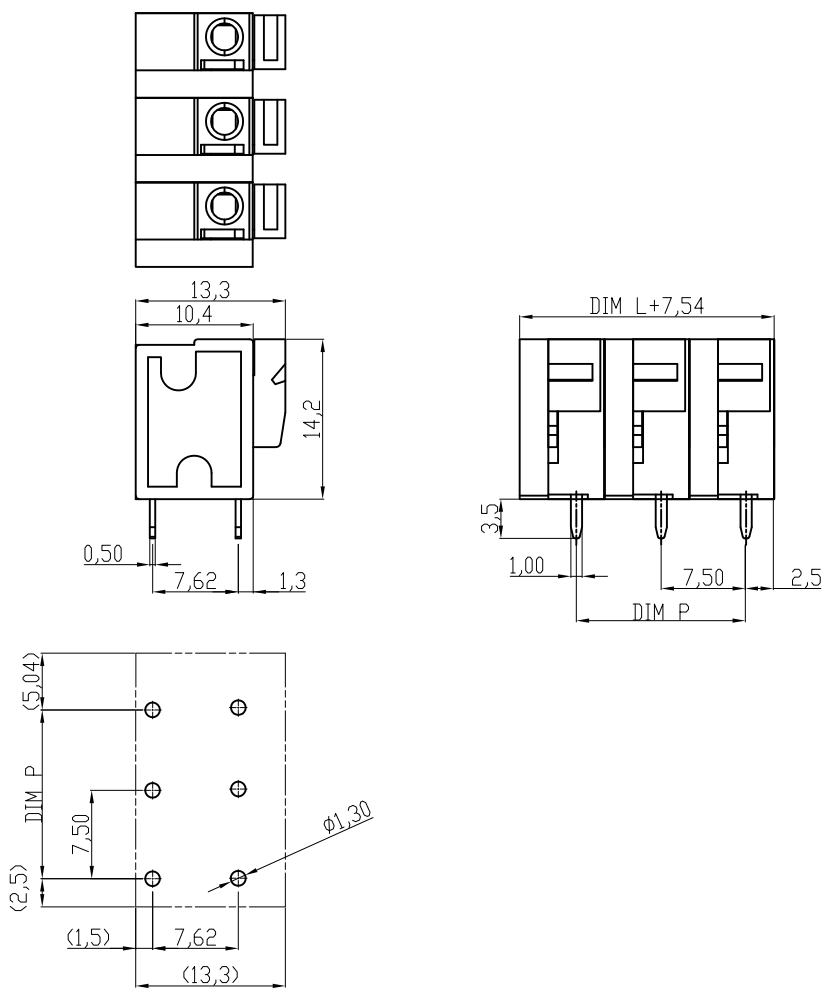
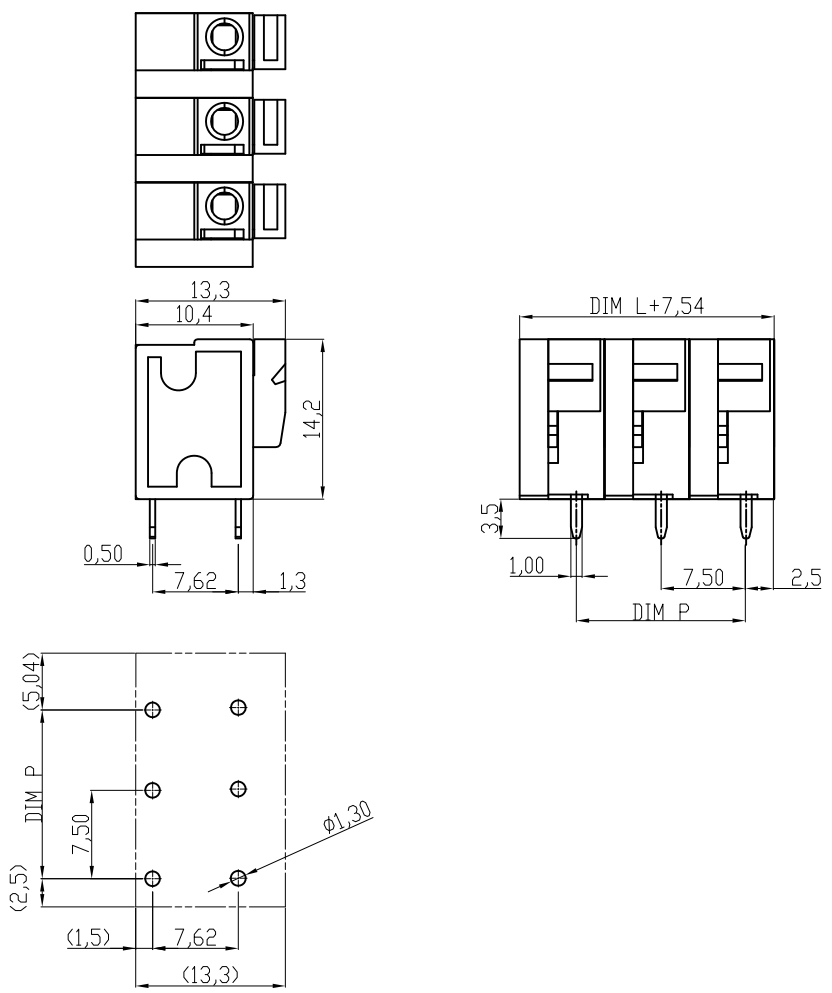
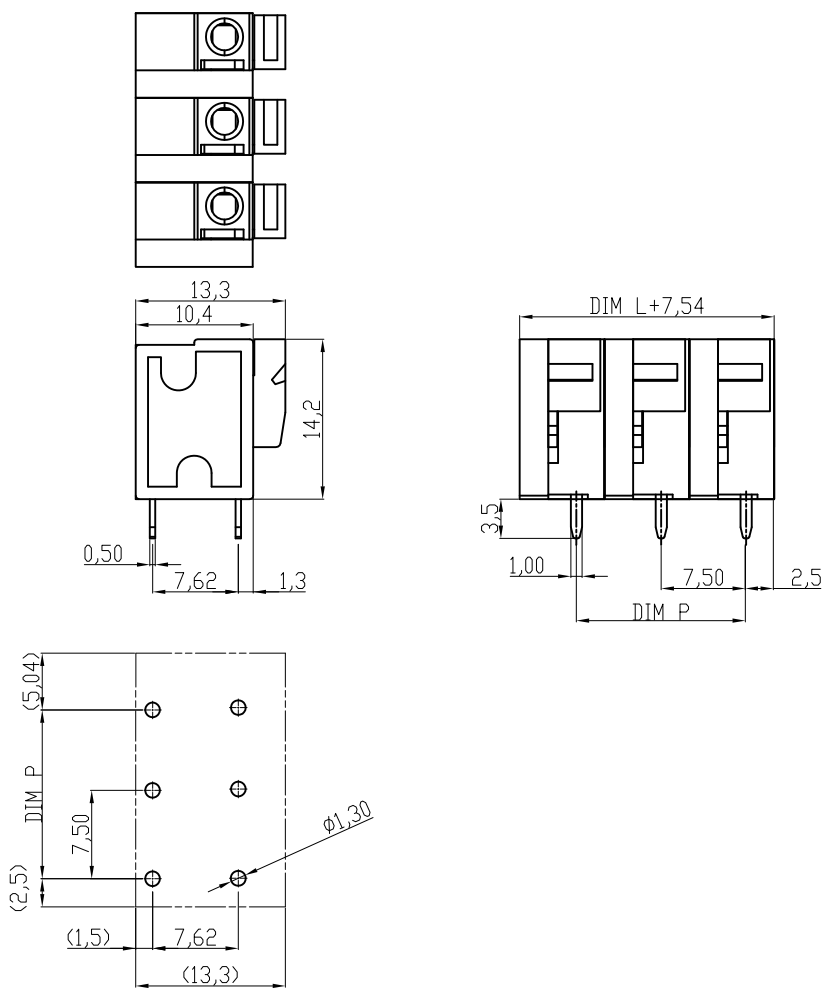
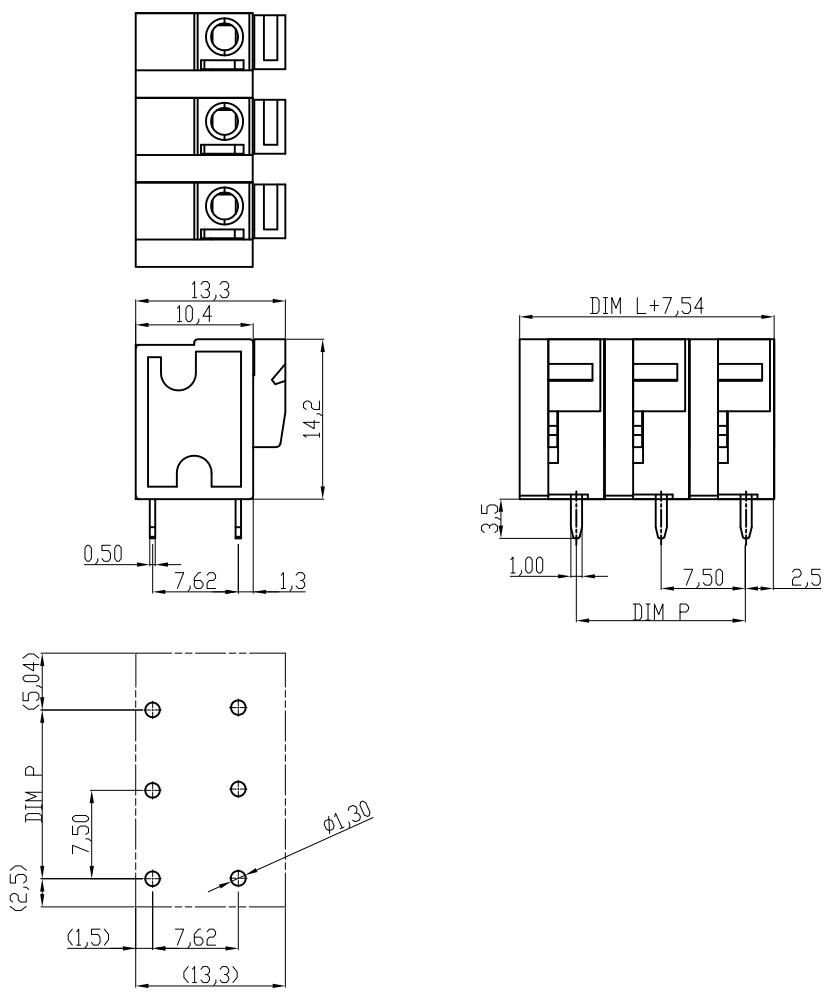
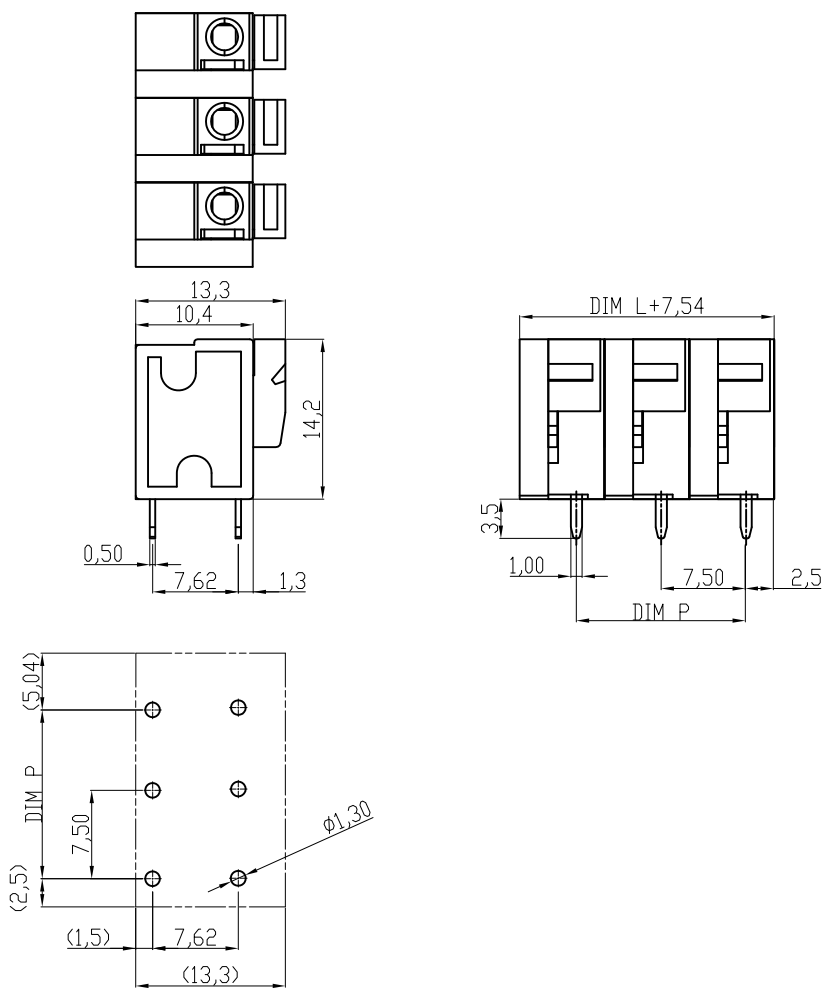
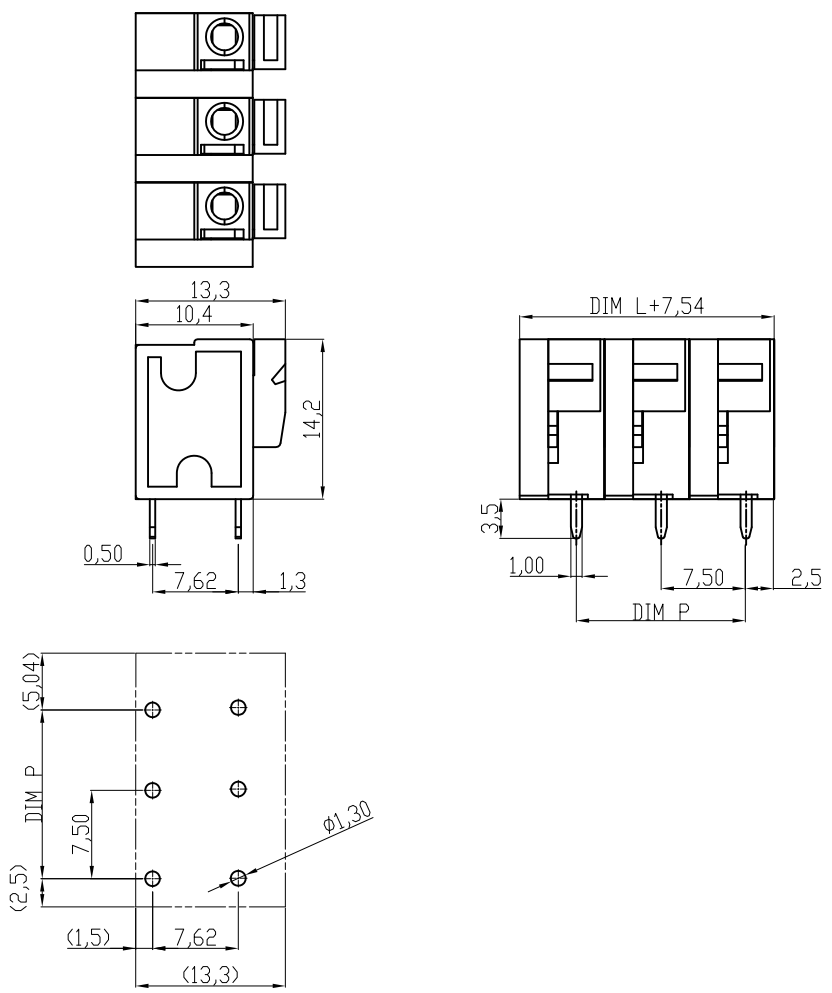
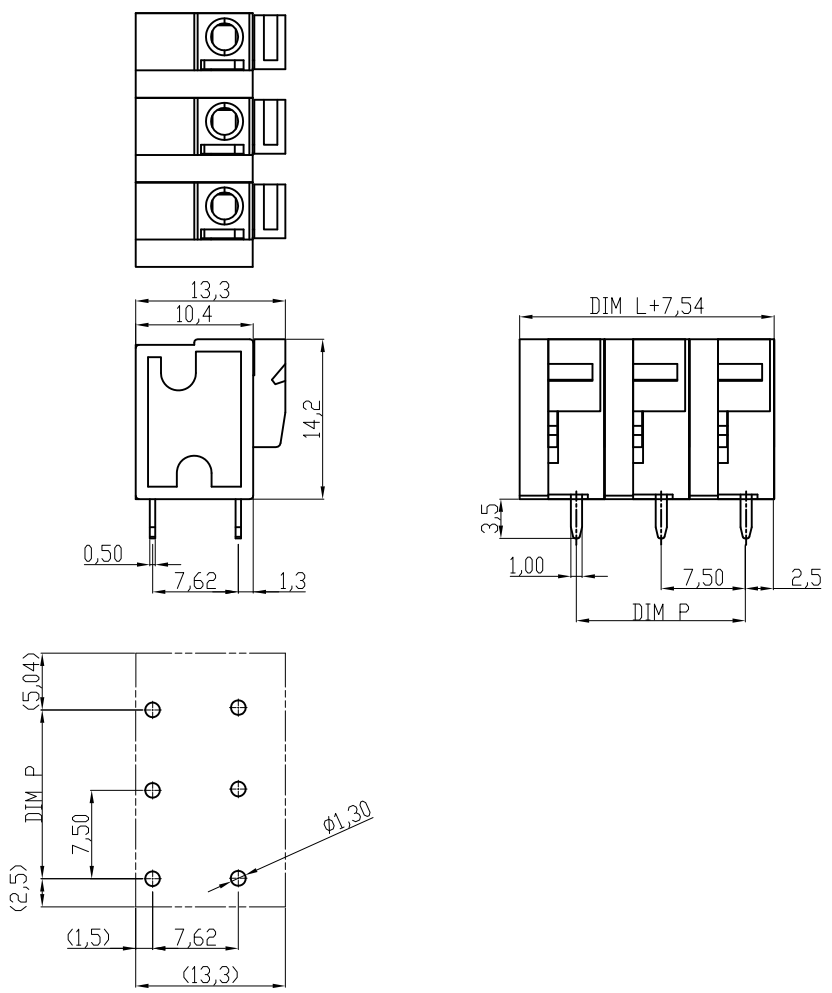
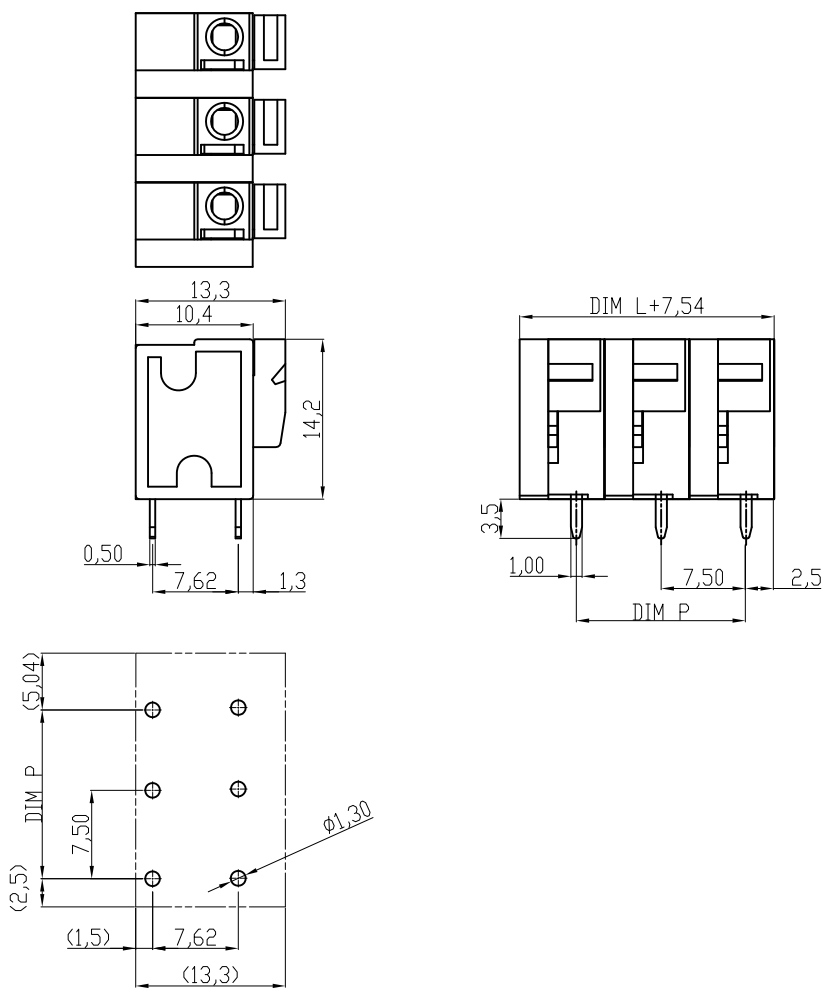
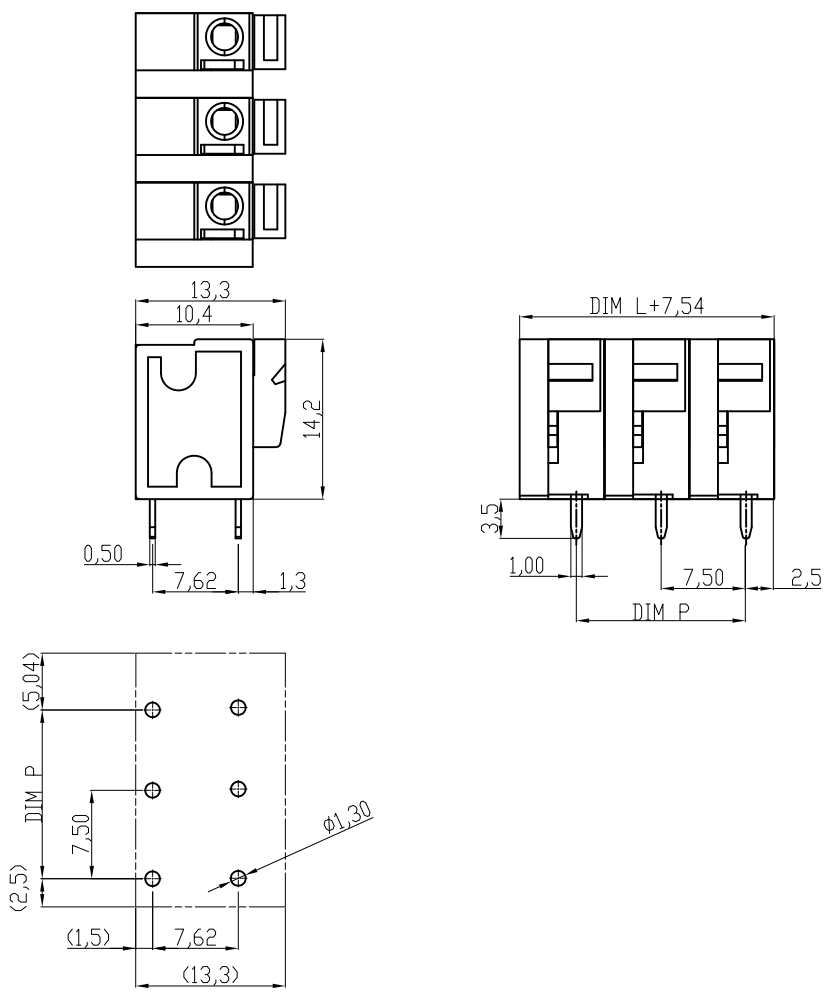
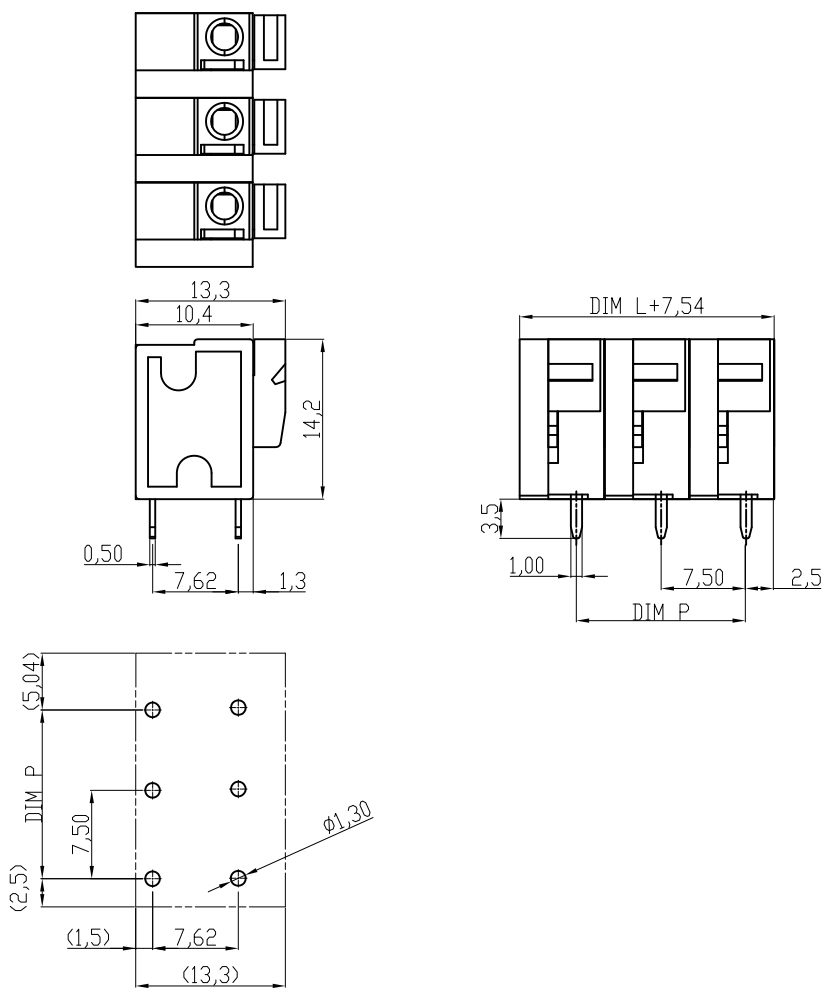
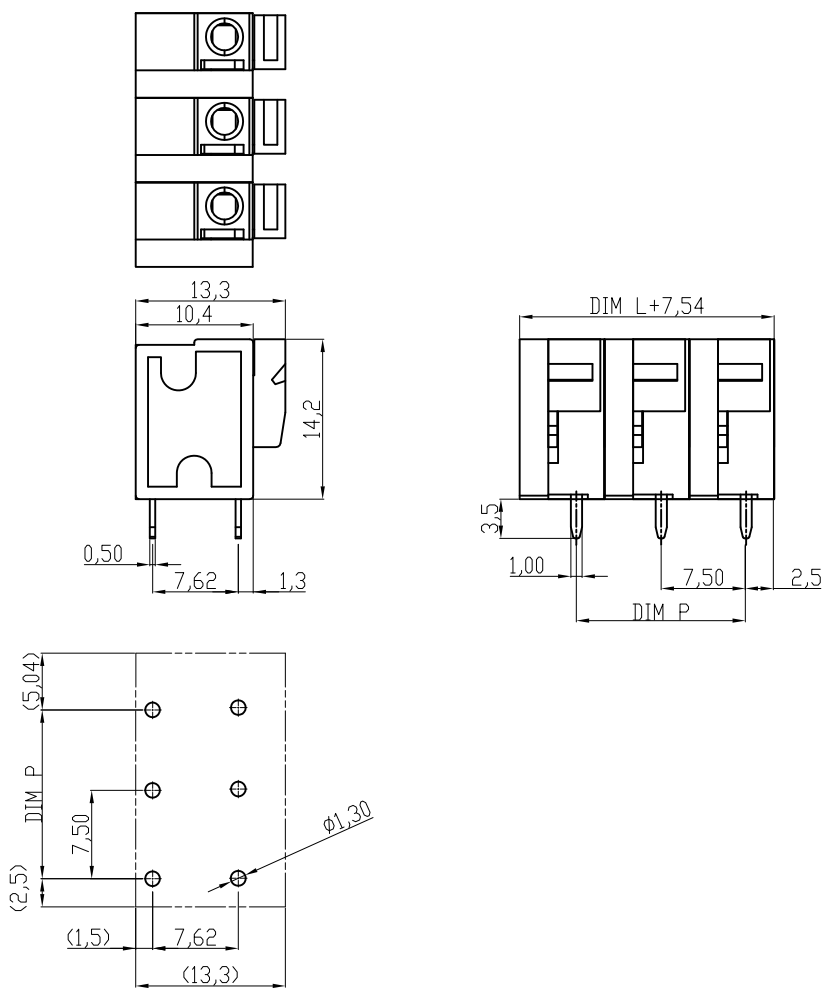
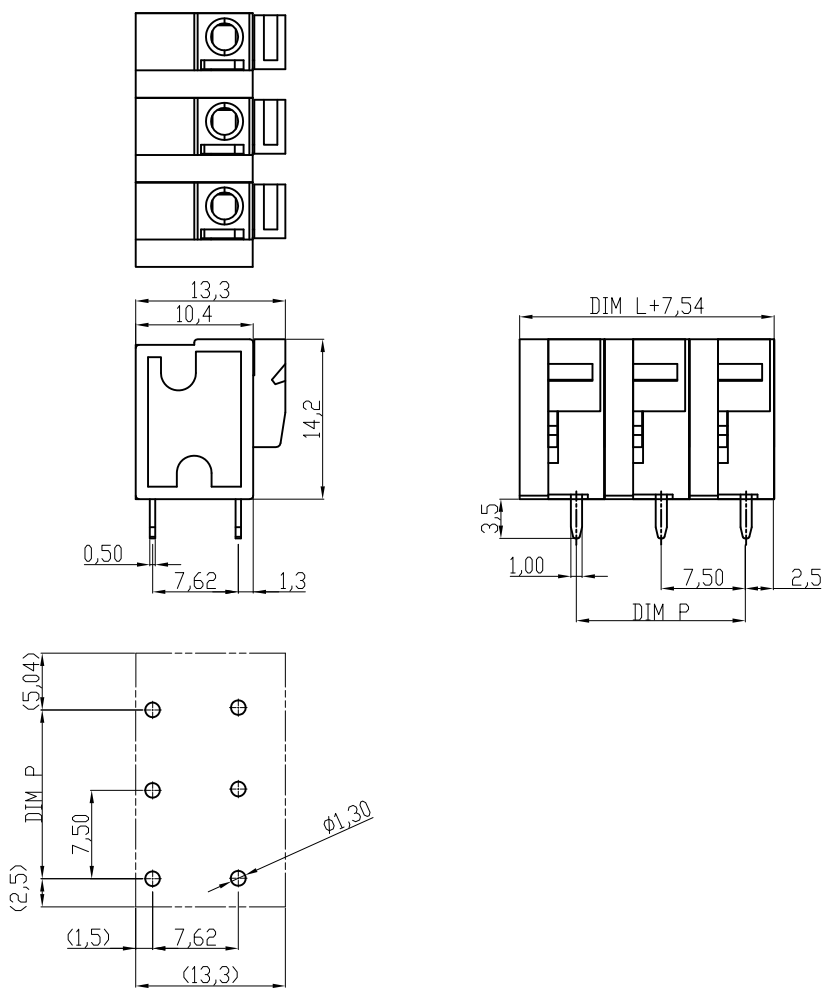
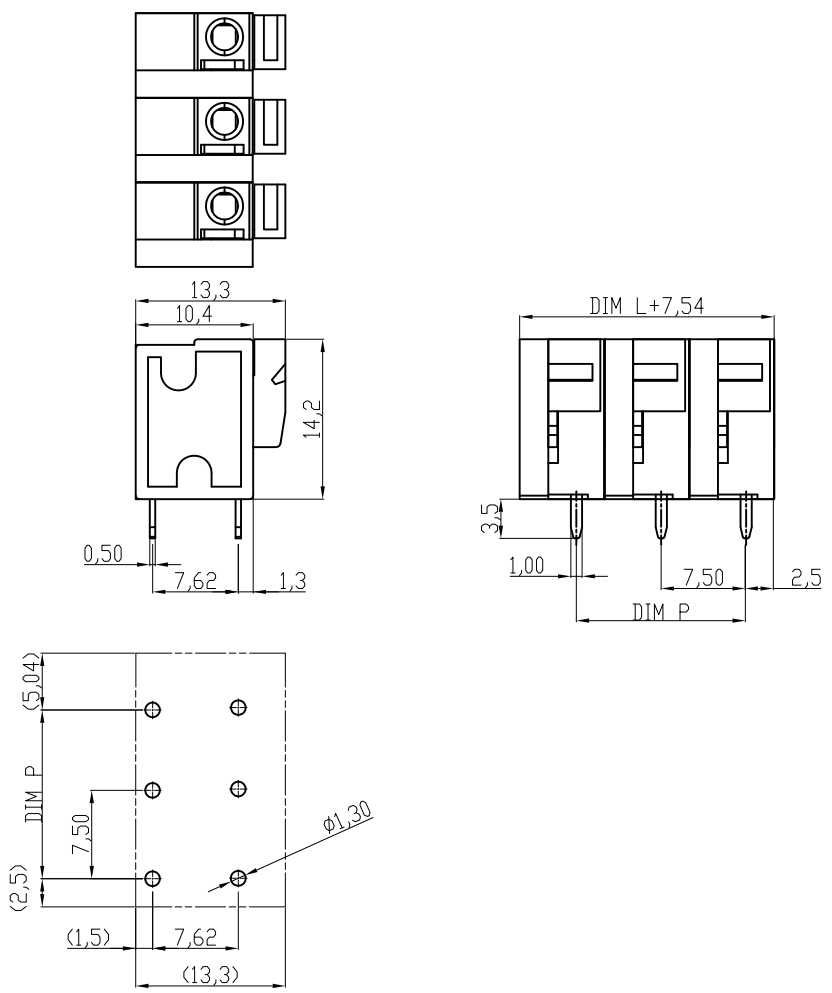
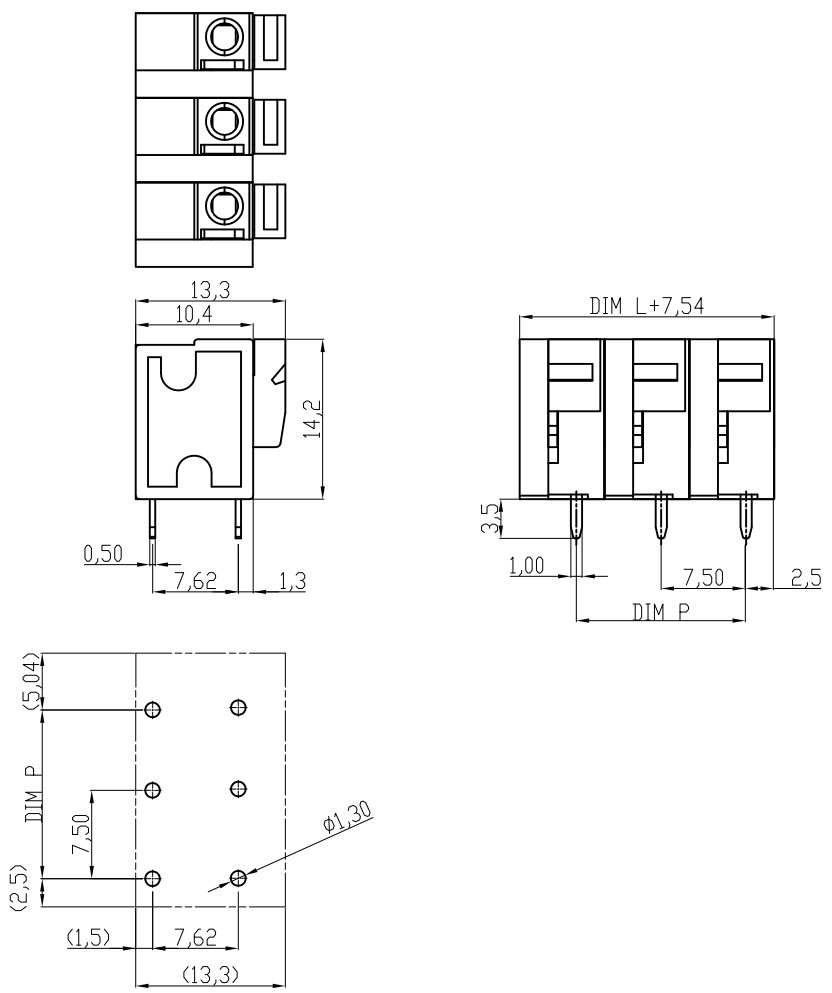
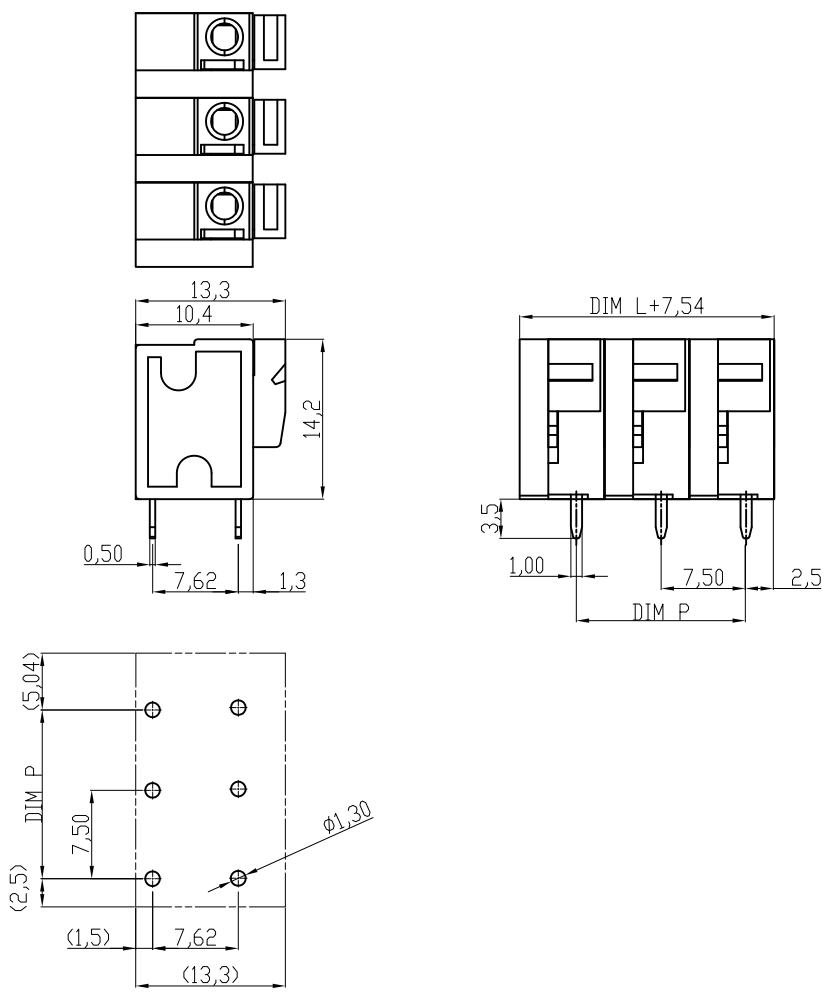
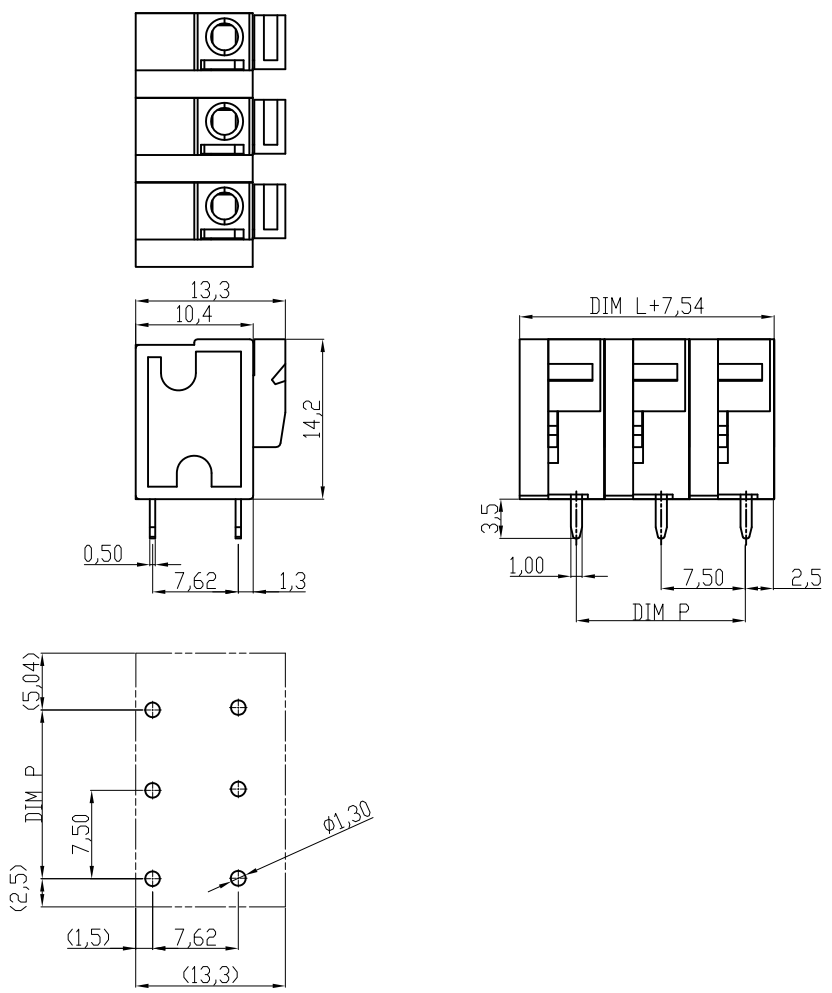
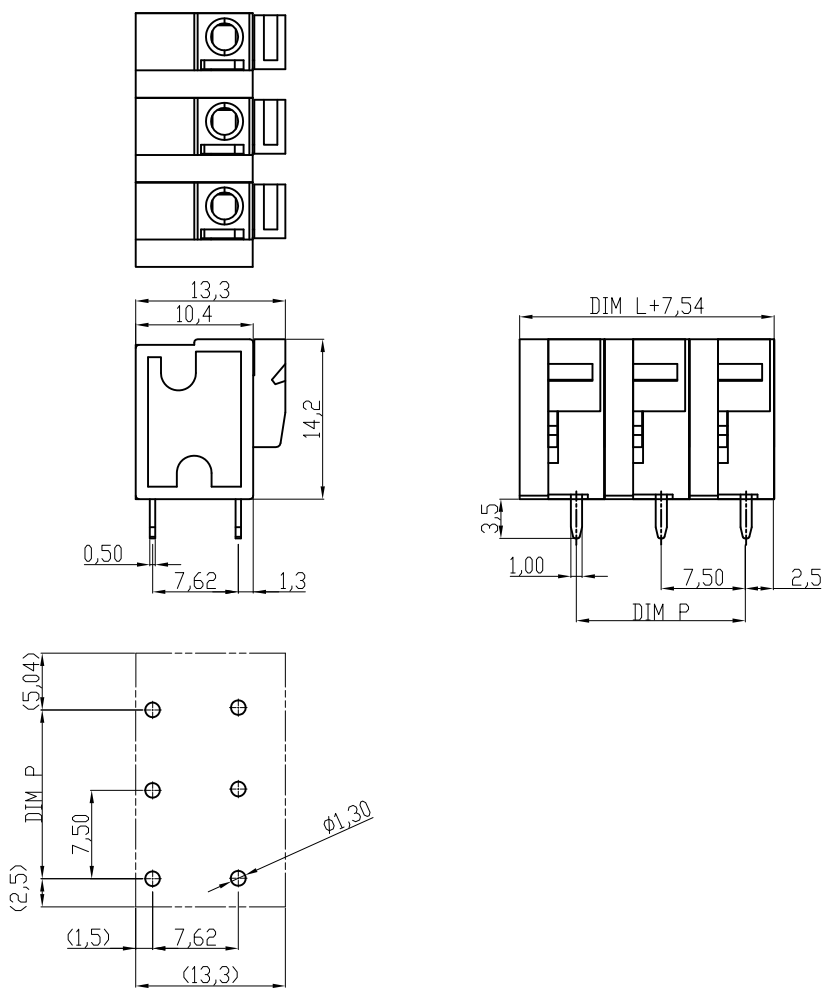
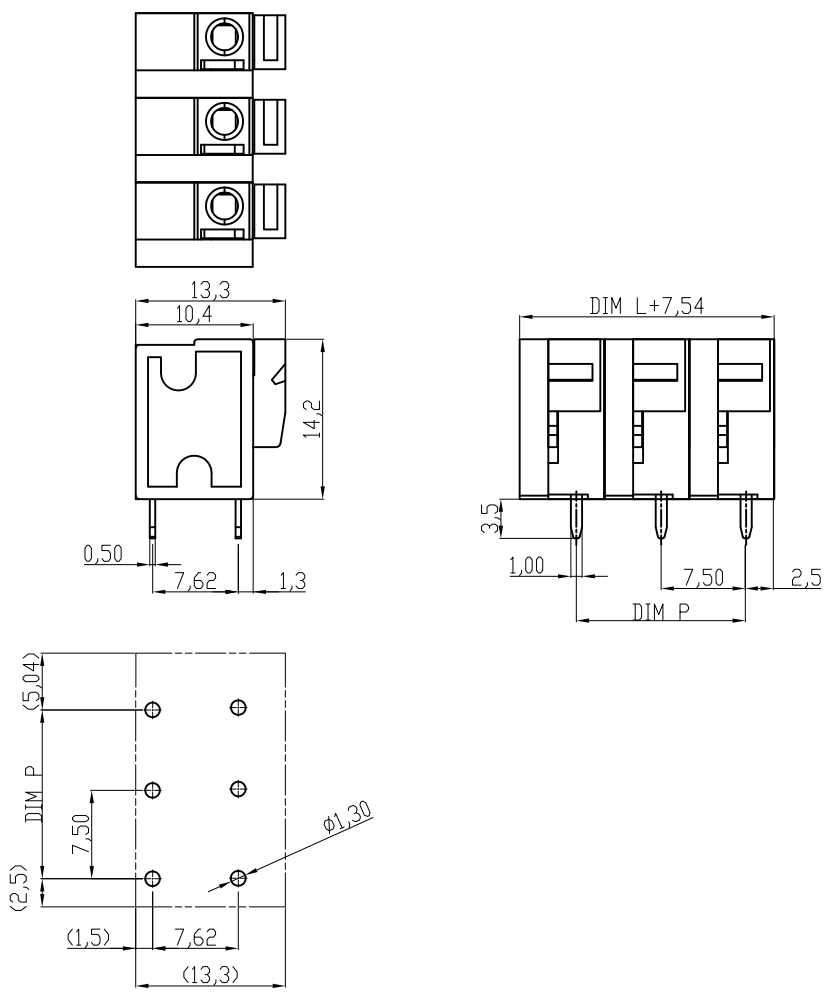
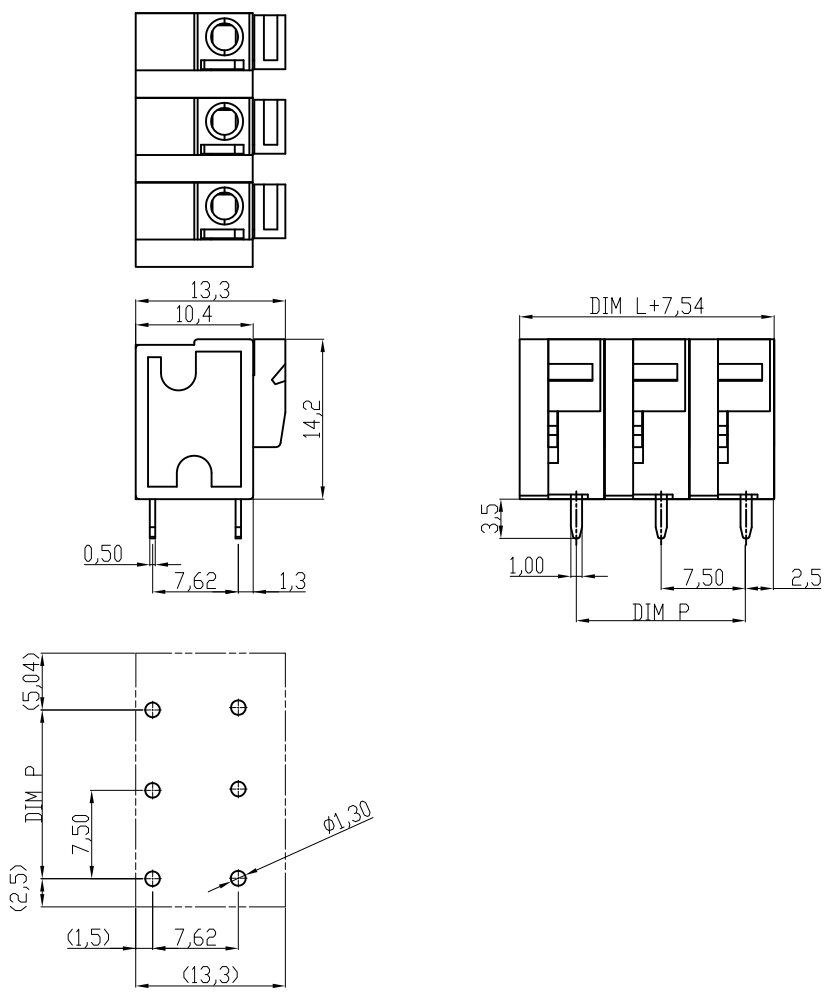
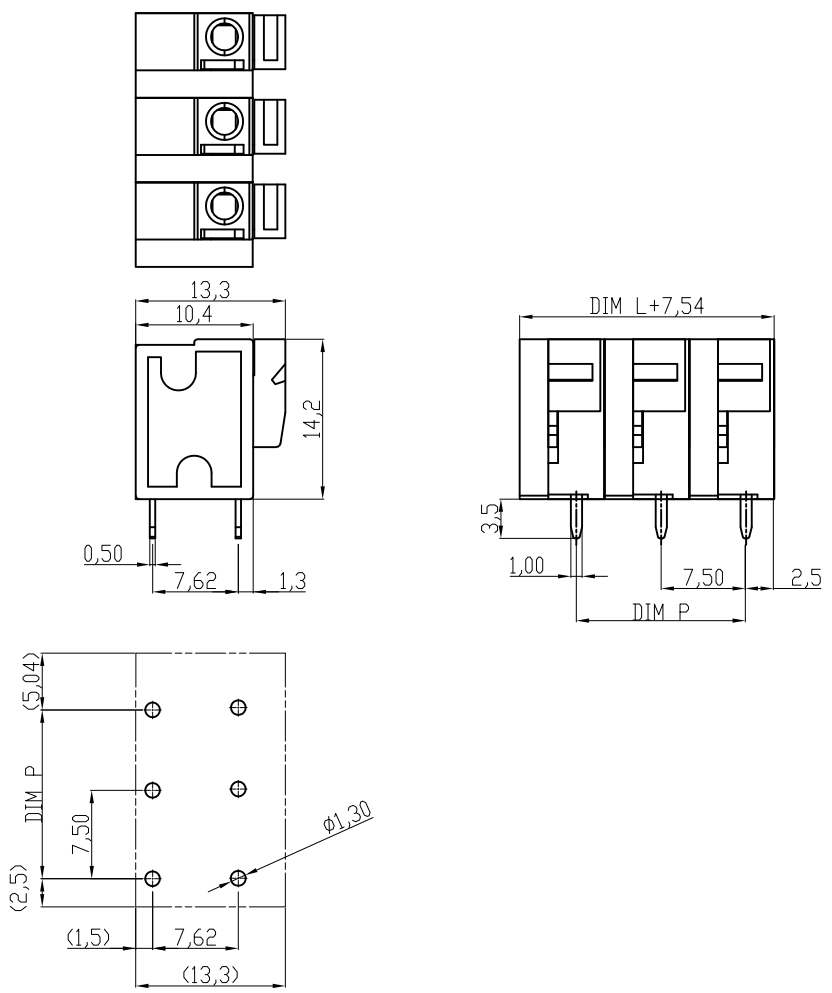
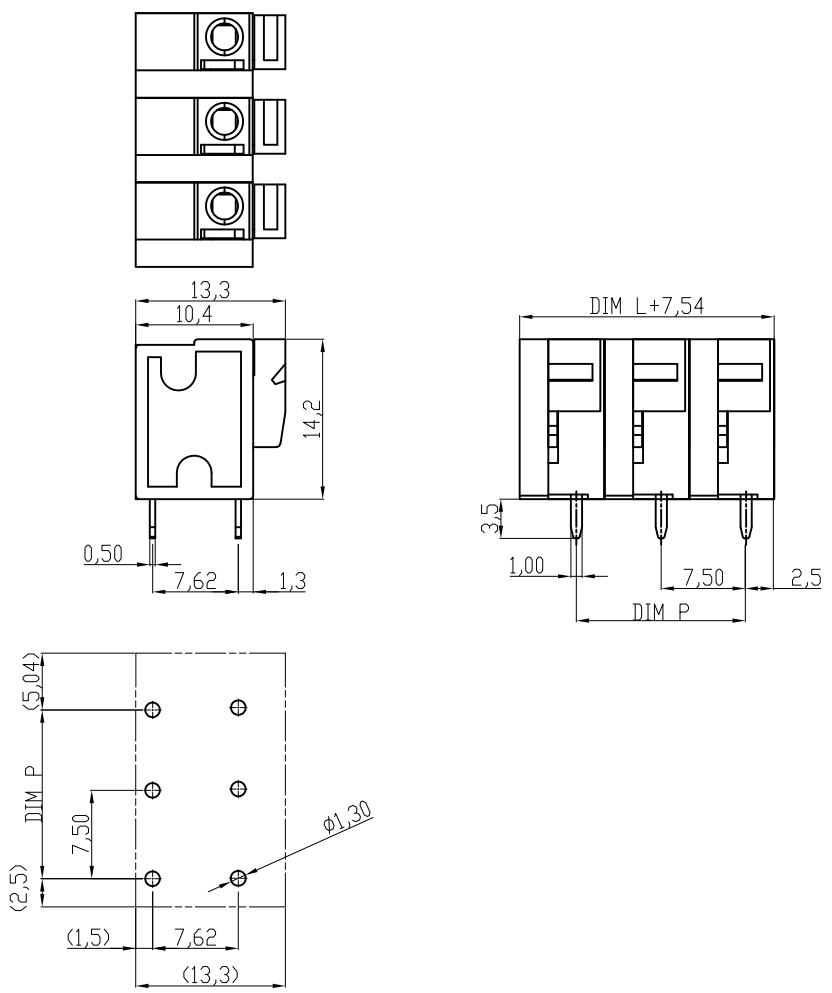
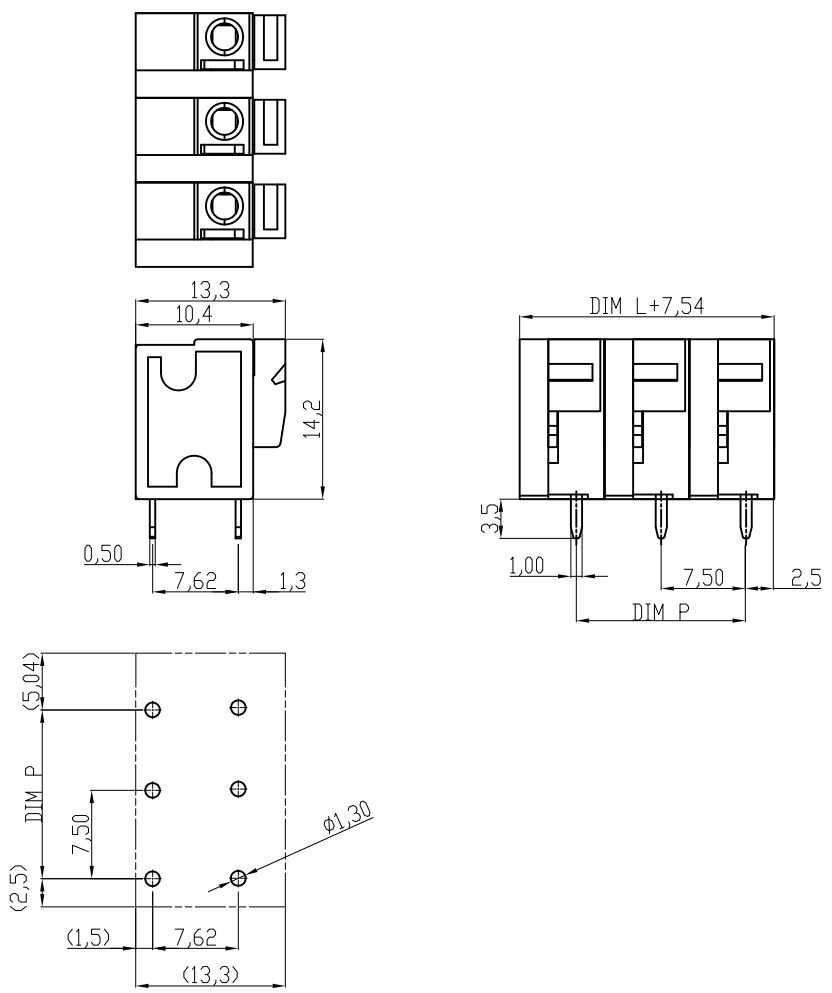
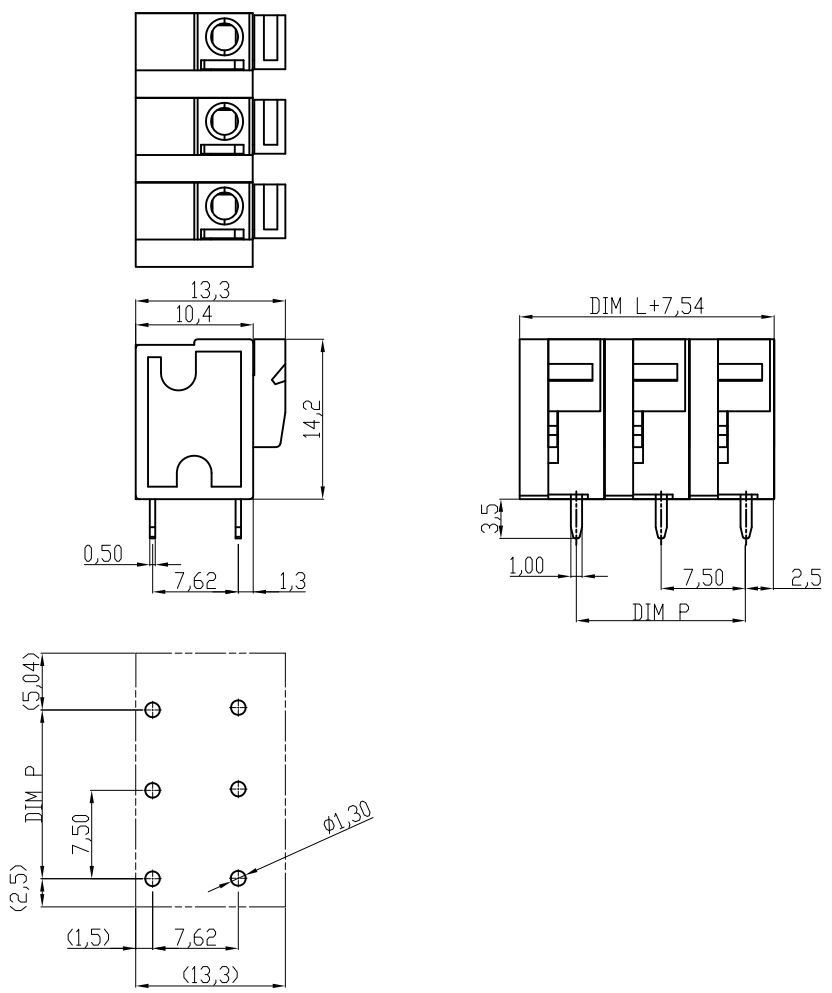
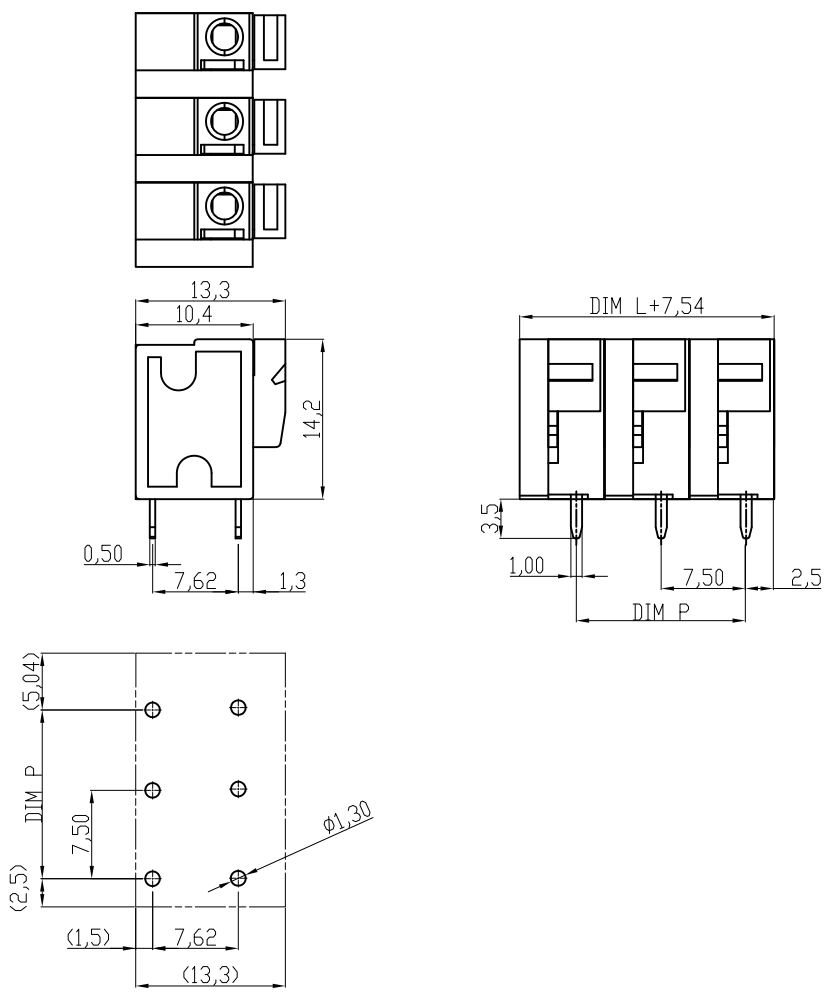
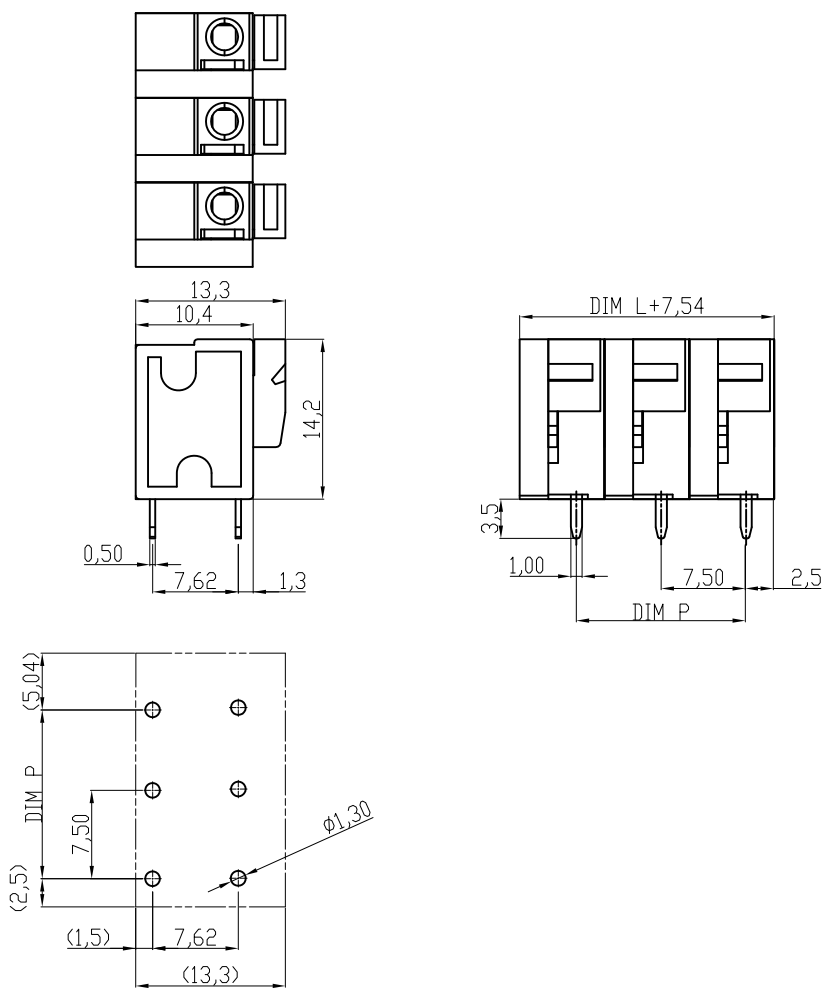
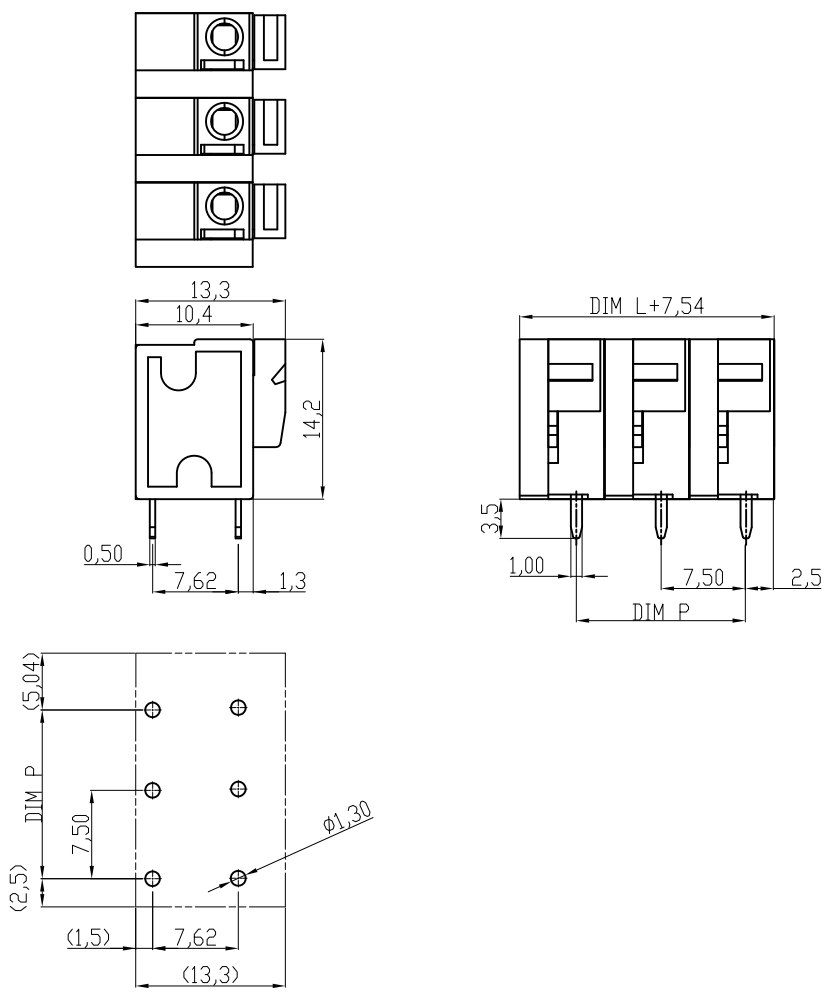
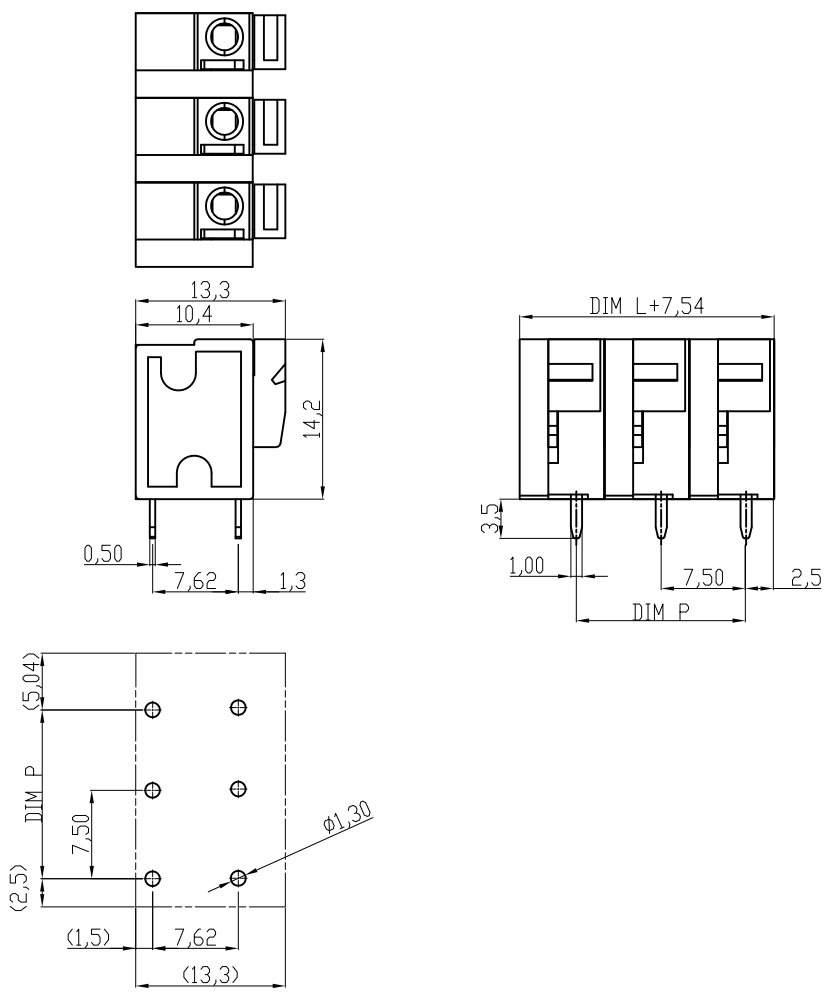
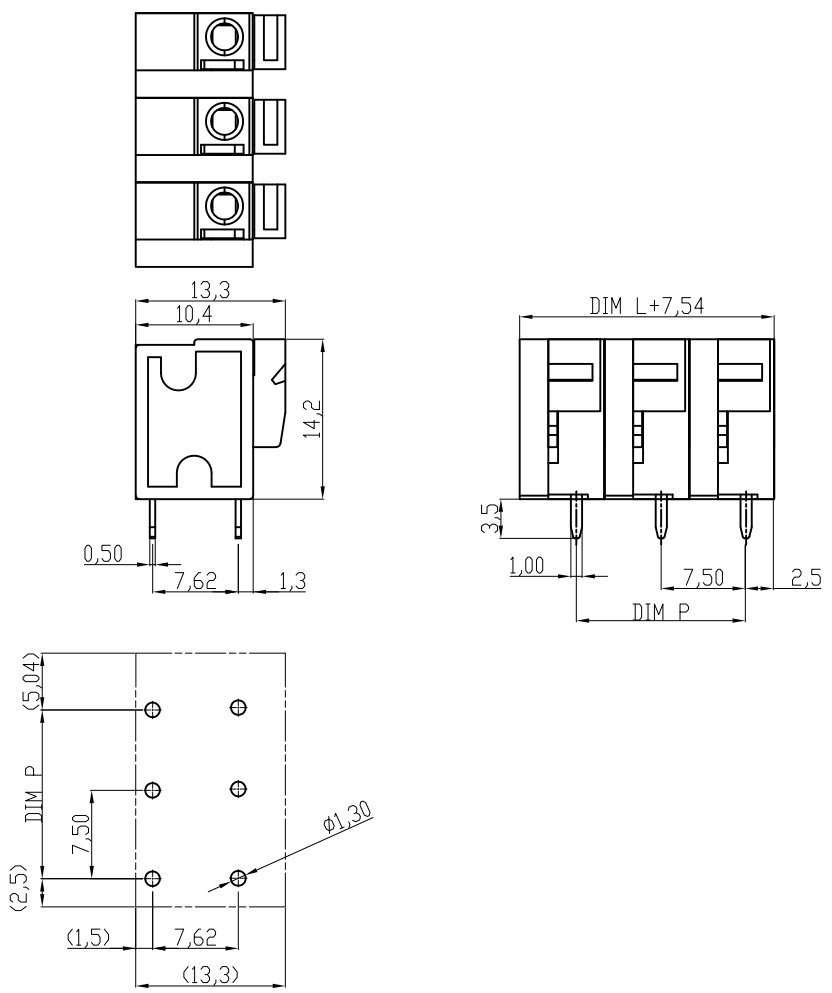
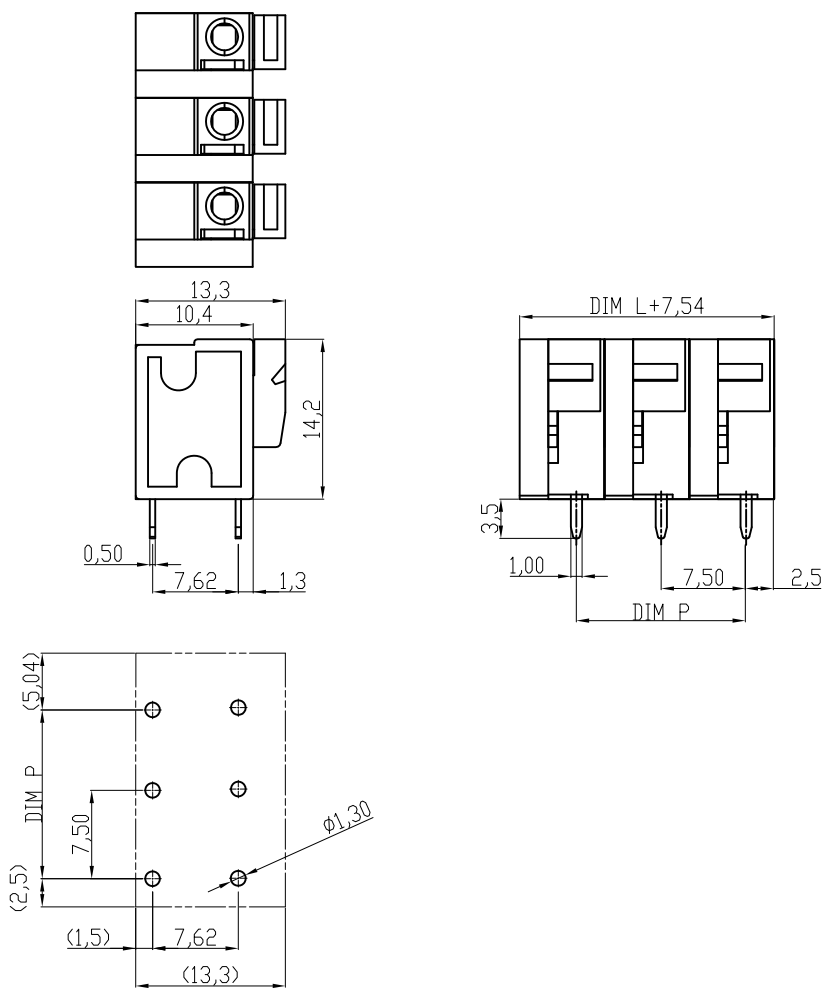
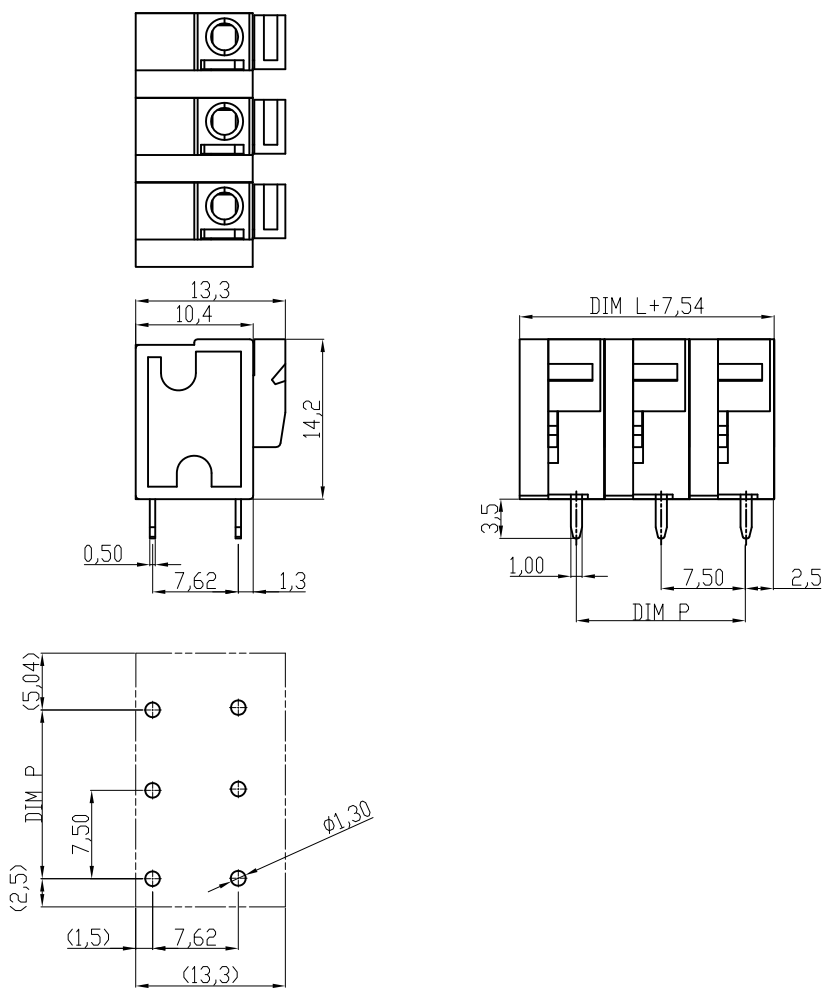
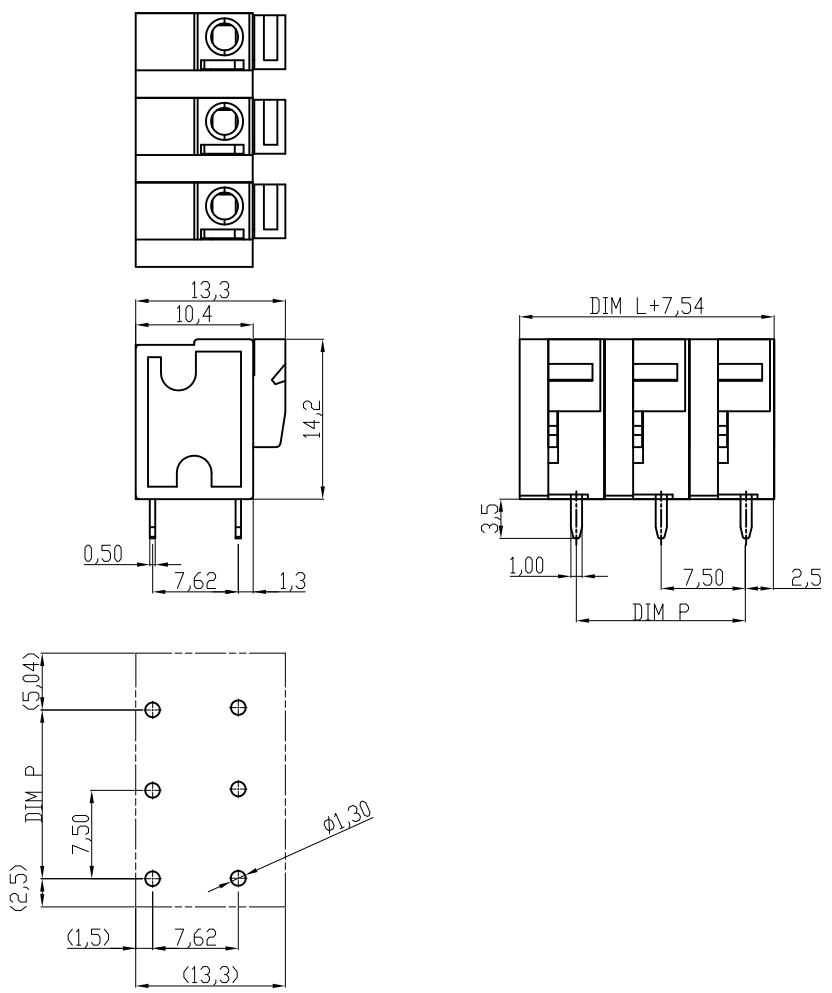
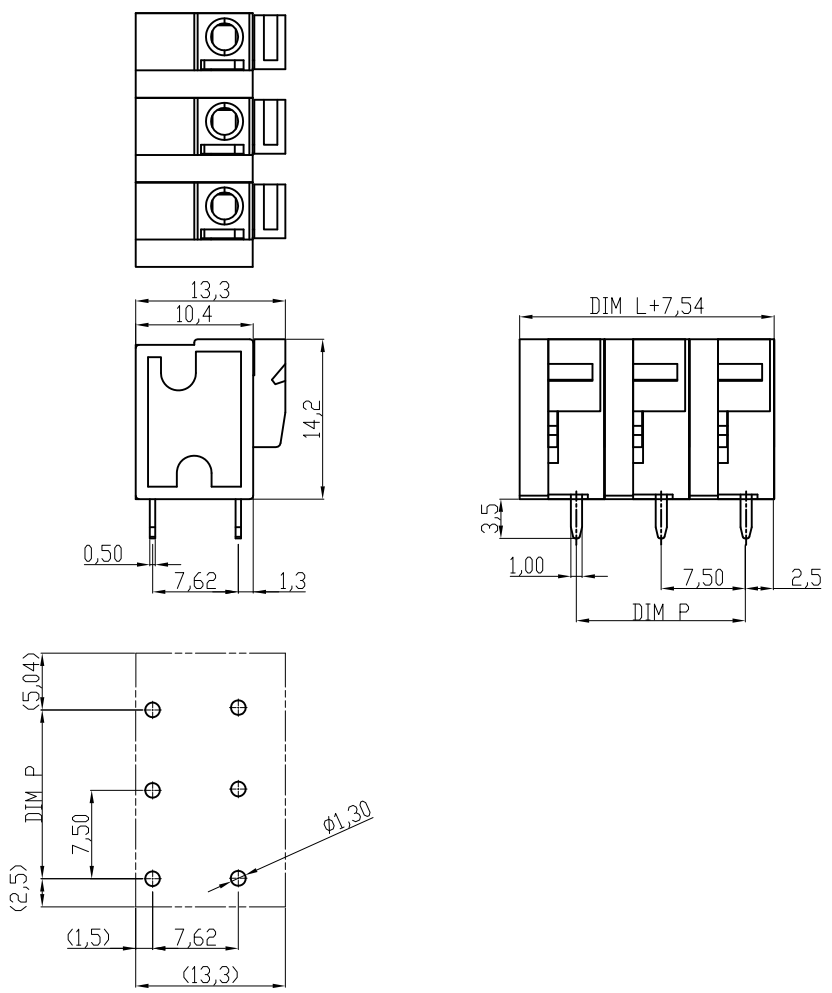
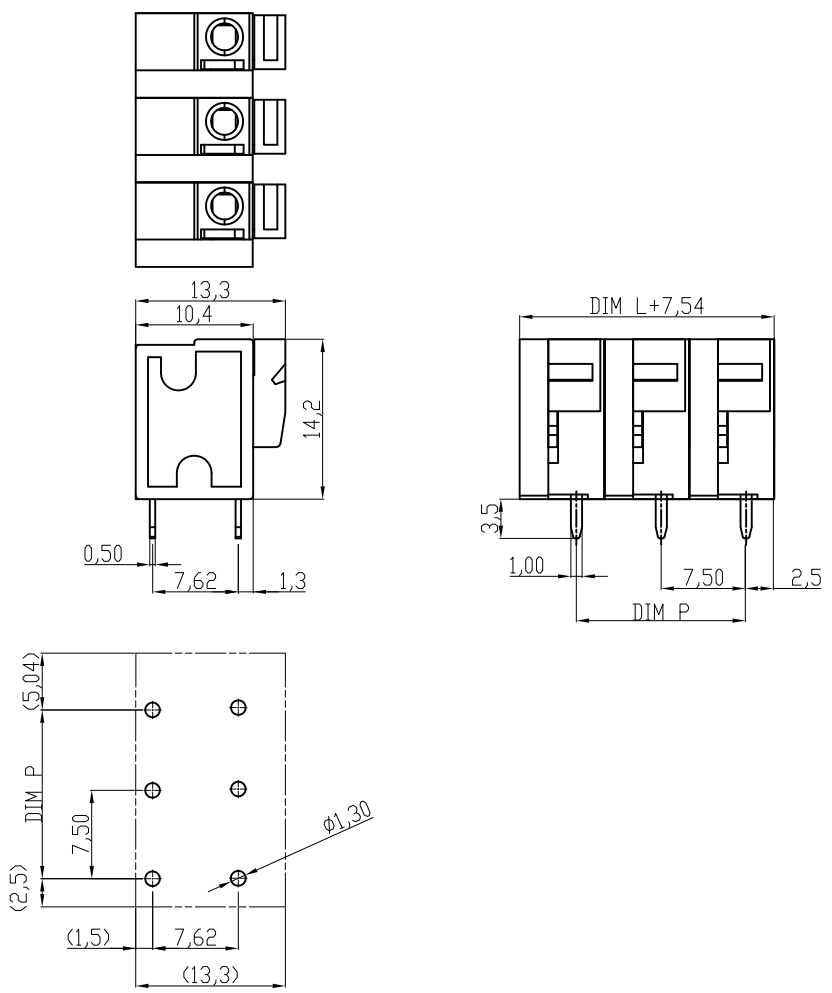



	1	2	3	4	5	6	7																
A						Material Terminal body(Contact pin): Brass Wire guard:Stainless steel Surface of Solder tail:Tin plated Terminal (housing): Thermoplastic (UL94V-0) , GREEN		A															
B						Electrical cULus/VDE Voltage rating: 300VAC/450VAC Current rating: 10A/10A Wire range: 0.75-1.5mm² Solid wire(AWG): 14-24 Stranded wire(AWG): 14-24 Pull force: Screw: Wire strip length: 9-10mm Withstanding Voltage: 1.6KV/2.5KV Operating temperature: -40°C to +115°C Soldering temperature: 250°C±10°C/5 Sec Safety Approval: 		B															
C								C															
D								D															
E						DIMENSION <table border="1" data-bbox="1420 965 1592 1042"><tr><td>L</td><td>Nx7.5</td></tr><tr><td>P</td><td>(N-1)x7.5</td></tr></table> N=Number of poles <table border="1" data-bbox="1706 1011 2136 1150"><thead><tr><th rowspan="2">Poles</th><th colspan="2">Tolerance</th></tr><tr><th>DIM L</th><th>DIM P</th></tr></thead><tbody><tr><td>2p-6p</td><td>±0.15</td><td>±0.10</td></tr><tr><td>7p-12p</td><td>±0.20</td><td>±0.20</td></tr></tbody></table>		L	Nx7.5	P	(N-1)x7.5	Poles	Tolerance		DIM L	DIM P	2p-6p	±0.15	±0.10	7p-12p	±0.20	±0.20	E
L						Nx7.5																	
P						(N-1)x7.5																	
Poles						Tolerance																	
	DIM L	DIM P																					
2p-6p	±0.15	±0.10																					
7p-12p	±0.20	±0.20																					
F								F															
G								G															
H								H															
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							
																							

Material

Terminal body(Contact pin): Brass
Wire guard:Stainless steel
Surface of Solder tail:Tin plated
Terminal (housing): Thermoplastic (UL94V-0) , GREEN

Electrical cULus/VDE

Voltage rating: 300VAC/450VAC
Current rating: 10A/10A
Wire range: 0.75-1.5mm²
Solid wire(AWG): 14-24
Stranded wire(AWG): 14-24
Pull force:
Screw:
Wire strip length: 9-10mm
Withstanding Voltage: 1.6KV/2.5KV
Operating temperature: -40°C to +115°C
Soldering temperature: 250°C±10°C/5 Sec
Safety Approval:



DIMENSION

L	Nx7,5
P	(N-1)x7.5

N=Number of poles

Poles	Tolerance	
	DIM L	DIM P
2p-6p	±0.15	±0.10
7p-12p	±0.20	±0.20

RECOMMENDER PCB LAYOUT

RoHS compliant

Scale	1:1						Date	Name
TOLERANCE						Drawn	19.04.2010	Alex
X.	±0.50					Approved	19.04.2010	Hellwig
X.X	±0.30							
X.XX	±0.10							
DIM	TOL							
X.°	±1°							
		①	Drawn	19.04.2010	Alex			
Angle	TOL	Id.	Modification	Date	Name			