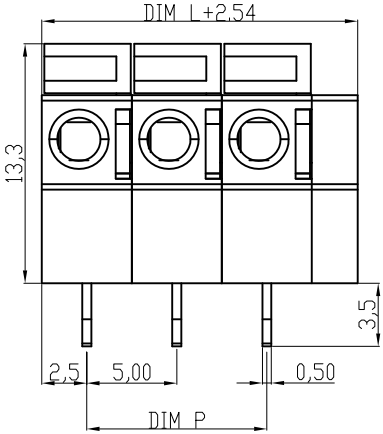
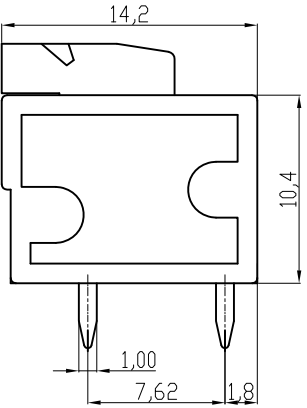
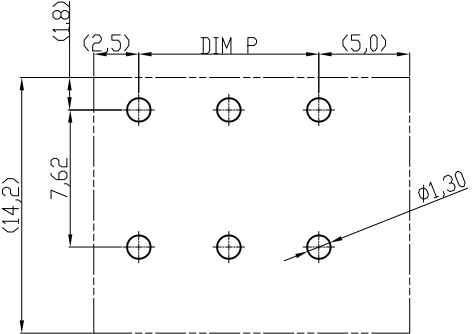


	1	2	3	4	5	6	7																																																																															
A	Material ①Terminal body(Contact pin):Brass ②Wire guard: Stainless steel ③Surface of solder tail: Tin plated ④Insulator(housing): Thermoplastic (UL94V-0) , GREEN							A																																																																														
B	Electrical cULus/VDE Voltage rating: 300VAC/250VAC Current rating: 10A/10A Wire range:0.75-1.5mm² Solid wire(AWG): 14-24 Stranded wire(AWG): 14-24 Pull force: Screw: Wire strip length: 9-10mm Withstanding Voltage: 1.6KV/2KV Operating temperature: -40°C to +115°C Soldering temperature: 250°C±10°C/5 Sec Safety Approval:  							B																																																																														
C	 							C																																																																														
D								D																																																																														
E	RECOMMENDER PCB LAYOUT							E																																																																														
F	DIMENSION <table><tr><td>L</td><td>Nx5.0</td></tr><tr><td>P</td><td>(N-1)x5.0</td></tr></table> N=Number of poles <table><thead><tr><th>Poles</th><th colspan="2">Tolerance</th></tr><tr><td></td><th>DIM L</th><th>DIM P</th></tr></thead><tbody><tr><td>2p-6p</td><td>±0.15</td><td>±0.10</td></tr><tr><td>7p-12p</td><td>±0.20</td><td>±0.20</td></tr><tr><td>13p-18p</td><td>±0.30</td><td>±0.25</td></tr><tr><td>19p-24p</td><td>±0.40</td><td>±0.30</td></tr></tbody></table>							L	Nx5.0	P	(N-1)x5.0	Poles	Tolerance			DIM L	DIM P	2p-6p	±0.15	±0.10	7p-12p	±0.20	±0.20	13p-18p	±0.30	±0.25	19p-24p	±0.40	±0.30	F																																																								
L	Nx5.0																																																																																					
P	(N-1)x5.0																																																																																					
Poles	Tolerance																																																																																					
	DIM L	DIM P																																																																																				
2p-6p	±0.15	±0.10																																																																																				
7p-12p	±0.20	±0.20																																																																																				
13p-18p	±0.30	±0.25																																																																																				
19p-24p	±0.40	±0.30																																																																																				
G	RoHS compliant <table><thead><tr><th>Scale</th><th>1:1</th><th></th><th></th><th></th><th></th><th>Date</th><th>Name</th><th>Customer-No.</th></tr></thead><tbody><tr><td>TOLERANCE</td><td></td><td></td><td></td><td></td><td></td><td>Drawn</td><td>19.04.2010</td><td>Alex</td></tr><tr><td>X.</td><td>±0.50</td><td></td><td></td><td></td><td></td><td>Approved</td><td>19.04.2010</td><td>Hellwig</td></tr><tr><td>X.X</td><td>±0.30</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.XX</td><td>±0.10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>DIM</td><td>TOL</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.°</td><td>±1°</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td>①</td><td>Drawn</td><td>19.04.2010</td><td>Alex</td><td colspan="3" rowspan="2"></td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td></tr></tbody></table>							Scale	1:1					Date	Name	Customer-No.	TOLERANCE						Drawn	19.04.2010	Alex	X.	±0.50					Approved	19.04.2010	Hellwig	X.X	±0.30								X.XX	±0.10								DIM	TOL								X.°	±1°										①	Drawn	19.04.2010	Alex				Angle	TOL	Id.	Modification	Date	Name	G
Scale	1:1					Date	Name	Customer-No.																																																																														
TOLERANCE						Drawn	19.04.2010	Alex																																																																														
X.	±0.50					Approved	19.04.2010	Hellwig																																																																														
X.X	±0.30																																																																																					
X.XX	±0.10																																																																																					
DIM	TOL																																																																																					
X.°	±1°																																																																																					
		①	Drawn	19.04.2010	Alex																																																																																	
Angle	TOL	Id.	Modification	Date	Name																																																																																	
H	<table><tr><td colspan="2">Drawing-No.</td><td rowspan="2">ASS 4125 CO</td><td rowspan="2">rev00</td></tr><tr><td colspan="2">Replace</td><td>Sheet</td></tr></table>							Drawing-No.		ASS 4125 CO	rev00	Replace		Sheet	H																																																																							
Drawing-No.		ASS 4125 CO	rev00																																																																																			
Replace				Sheet																																																																																		
	1	2	3	4	5	6	7																																																																															