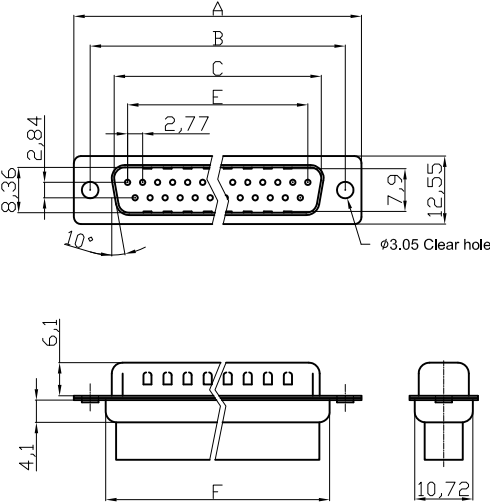
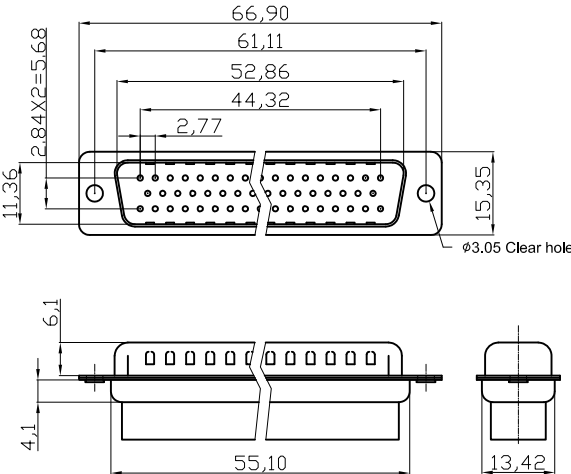


	1	2	3	4	5	6	7																																																																																	
A	Male					NOTES: MATERIAL 1.Insulator Material:Glass-filled thermoplastic PBT,UL94V-0 2.Insulator color :Black 3.Shell :Steel, 100 μ" Tin Over 50μ" min Copper 4.Contact: Brass 5.Housing: Zytel FR-50 UL94V-0, Standard colour black ELECTRICAL 1.Contact Resistance: 30mOhm max. at DC 100mA 2.Insulator Resistance: 1000MOhm Min. at DC 500V 3.Current Rating: 3 AMP 4.Dielectric Withstanding Voltage: AC 500V for 1 minute OPERATING TEMPERATURE:-20°C+85°C Order Code: A-Dx CR xx FZ Contact style: F - Female S - Male No. of Contacts 09 / 15 / 25 / 37			A																																																																															
B									B																																																																															
C									C																																																																															
D									D																																																																															
E	50 Positions					Dimensions <table><tr><th>Positions</th><th>A</th><th>B</th><th>C</th><th>E</th><th>F</th></tr><tr><td>09</td><td>30.81</td><td>24.99</td><td>16.92</td><td>11.08</td><td>19.20</td></tr><tr><td>15</td><td>39.20</td><td>33.30</td><td>25.25</td><td>19.39</td><td>27.70</td></tr><tr><td>25</td><td>53.05</td><td>47.04</td><td>38.96</td><td>33.24</td><td>41.10</td></tr><tr><td>37</td><td>69.40</td><td>63.50</td><td>55.42</td><td>49.86</td><td>57.30</td></tr></table>			Positions	A	B	C	E	F	09	30.81	24.99	16.92	11.08	19.20	15	39.20	33.30	25.25	19.39	27.70	25	53.05	47.04	38.96	33.24	41.10	37	69.40	63.50	55.42	49.86	57.30	E																																																	
Positions	A	B	C	E	F																																																																																			
09	30.81	24.99	16.92	11.08	19.20																																																																																			
15	39.20	33.30	25.25	19.39	27.70																																																																																			
25	53.05	47.04	38.96	33.24	41.10																																																																																			
37	69.40	63.50	55.42	49.86	57.30																																																																																			
F									F																																																																															
G	RoHS compliant Unit: mm  File No.: E198287					<table><tr><td>Scale</td><td>Free</td><td></td><td></td><td></td><td></td><td>Date</td><td>Name</td><td colspan="2">Customer-No.</td></tr><tr><td>TOLERANCE</td><td></td><td></td><td></td><td></td><td></td><td>Drawn</td><td>15.08.2012</td><td colspan="2">Lucas</td></tr><tr><td>X.</td><td>±0.38</td><td></td><td></td><td></td><td></td><td rowspan="3">Approved</td><td rowspan="8">15.08.2012</td><td colspan="2">ASSMANN WSW-No.</td></tr><tr><td>X.X</td><td>±0.25</td><td></td><td></td><td></td><td></td><td colspan="2">A-Dx CR xx FZ</td></tr><tr><td>X.XX</td><td>±0.13</td><td></td><td></td><td></td><td></td><td colspan="2">Drawing-No.</td></tr><tr><td>DIM</td><td>TOL</td><td></td><td></td><td></td><td colspan="2" rowspan="3"></td><td colspan="2">ASS 4893 CO</td></tr><tr><td>X.°</td><td>±3°</td><td rowspan="2">Ⓢ</td><td rowspan="2">Drawn</td><td rowspan="2">15.08.2012</td><td colspan="3" rowspan="2">Lucas</td><td colspan="2">rev00</td></tr><tr><td>X.X°</td><td>±1.0°</td><td colspan="2">Sheet</td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td colspan="2">Replace</td><td colspan="2">1/2</td></tr></table>			Scale	Free					Date	Name	Customer-No.		TOLERANCE						Drawn	15.08.2012	Lucas		X.	±0.38					Approved	15.08.2012	ASSMANN WSW-No.		X.X	±0.25					A-Dx CR xx FZ		X.XX	±0.13					Drawing-No.		DIM	TOL						ASS 4893 CO		X.°	±3°	Ⓢ	Drawn	15.08.2012	Lucas			rev00		X.X°	±1.0°	Sheet		Angle	TOL	Id.	Modification	Date	Name	Replace		1/2		G
Scale	Free					Date	Name	Customer-No.																																																																																
TOLERANCE						Drawn	15.08.2012	Lucas																																																																																
X.	±0.38					Approved	15.08.2012	ASSMANN WSW-No.																																																																																
X.X	±0.25							A-Dx CR xx FZ																																																																																
X.XX	±0.13							Drawing-No.																																																																																
DIM	TOL							ASS 4893 CO																																																																																
X.°	±3°	Ⓢ	Drawn	15.08.2012				Lucas			rev00																																																																													
X.X°	±1.0°										Sheet																																																																													
Angle	TOL	Id.	Modification	Date	Name	Replace		1/2																																																																																
H									H																																																																															
	1	2	3	4	5	6	7																																																																																	

	1	2	3	4	5	6	7																																																																																								
A	Female NOTES: MATERIAL 1.Insulator Material:Glass-filled thermoplastic PBT,UL94V-0 rated 2.Contact Material:Brass or Phosphor Bronze 3.Shell :Steel, 100 μ" Tin Over 50μ" min Nickel 4.Clinch Nut: Brass, 100μ" min Nickel Plated 5.Boardlock: Brass, 100μ" min Nickel Plated 6.Screwlock:Brass, 100μ" min Nickel Plated ELECTRICAL 1.Current Rating : 3 AMP 2.Voltage Rating : 250V AC/rms 60Hz 3.Contact Resistance: 20mΩ Max at 1 AMP DC 4.Insulation Resistance: 1000MΩ at 500 VDC 5.Withstand Voltage: 1000V AC/rms 60Hz for 1 minute 6.Operating Temperature:-20°C+85°C Dimensions <table><tr><th>Positions</th><th>A</th><th>B</th><th>D</th><th>E</th><th>F</th></tr><tr><td>09</td><td>30.81</td><td>24.99</td><td>16.33</td><td>11.08</td><td>19.02</td></tr><tr><td>15</td><td>39.20</td><td>33.30</td><td>24.70</td><td>19.39</td><td>27.70</td></tr><tr><td>25</td><td>53.05</td><td>47.04</td><td>38.40</td><td>33.24</td><td>41.10</td></tr><tr><td>37</td><td>69.40</td><td>63.50</td><td>54.80</td><td>49.86</td><td>57.30</td></tr></table>								Positions	A	B	D	E	F	09	30.81	24.99	16.33	11.08	19.02	15	39.20	33.30	24.70	19.39	27.70	25	53.05	47.04	38.40	33.24	41.10	37	69.40	63.50	54.80	49.86	57.30	A																																																								
Positions	A	B	D	E	F																																																																																										
09	30.81	24.99	16.33	11.08	19.02																																																																																										
15	39.20	33.30	24.70	19.39	27.70																																																																																										
25	53.05	47.04	38.40	33.24	41.10																																																																																										
37	69.40	63.50	54.80	49.86	57.30																																																																																										
B									B																																																																																						
C									C																																																																																						
D									D																																																																																						
E									E																																																																																						
F									F																																																																																						
G	RoHS compliant Unit: mm File No.: E198287 <table><tr><td>Scale</td><td>Free</td><td></td><td></td><td></td><td></td><td></td><td>Date</td><td>Name</td><td colspan="2">Customer-No.</td></tr><tr><td>TOLERANCE</td><td></td><td></td><td></td><td></td><td></td><td></td><td>Drawn</td><td>15.08.2012</td><td>Lucas</td><td rowspan="2">ASSMANN WSW-No. A-Dx CR xx FZ</td></tr><tr><td>X.</td><td>±0.38</td><td></td><td></td><td></td><td></td><td></td><td rowspan="2">Approved</td><td rowspan="2">15.08.2012</td><td rowspan="2">Winnie</td></tr><tr><td>X.X</td><td>±0.25</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.XX</td><td>±0.13</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td rowspan="3">Drawing-No. ASS 4893 CO rev00</td></tr><tr><td>DIM</td><td>TOL</td><td></td><td></td><td></td><td></td><td></td><td colspan="5" rowspan="2"></td></tr><tr><td>X.°</td><td>±3°</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.X°</td><td>±1.0°</td><td>Ⓢ</td><td>Drawn</td><td>15.08.2012</td><td>Lucas</td><td colspan="4" rowspan="2"></td><td rowspan="2">H</td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td></tr></table>								Scale	Free						Date	Name	Customer-No.		TOLERANCE							Drawn	15.08.2012	Lucas	ASSMANN WSW-No. A-Dx CR xx FZ	X.	±0.38						Approved	15.08.2012	Winnie	X.X	±0.25						X.XX	±0.13									Drawing-No. ASS 4893 CO rev00	DIM	TOL											X.°	±3°						X.X°	±1.0°	Ⓢ	Drawn	15.08.2012	Lucas					H	Angle	TOL	Id.	Modification	Date	Name	G
Scale	Free						Date	Name	Customer-No.																																																																																						
TOLERANCE							Drawn	15.08.2012	Lucas	ASSMANN WSW-No. A-Dx CR xx FZ																																																																																					
X.	±0.38						Approved	15.08.2012	Winnie																																																																																						
X.X	±0.25																																																																																														
X.XX	±0.13									Drawing-No. ASS 4893 CO rev00																																																																																					
DIM	TOL																																																																																														
X.°	±3°																																																																																														
X.X°	±1.0°	Ⓢ	Drawn	15.08.2012	Lucas					H																																																																																					
Angle	TOL	Id.	Modification	Date	Name																																																																																										
H									H																																																																																						
	1	2	3	4	5	6	7																																																																																								