


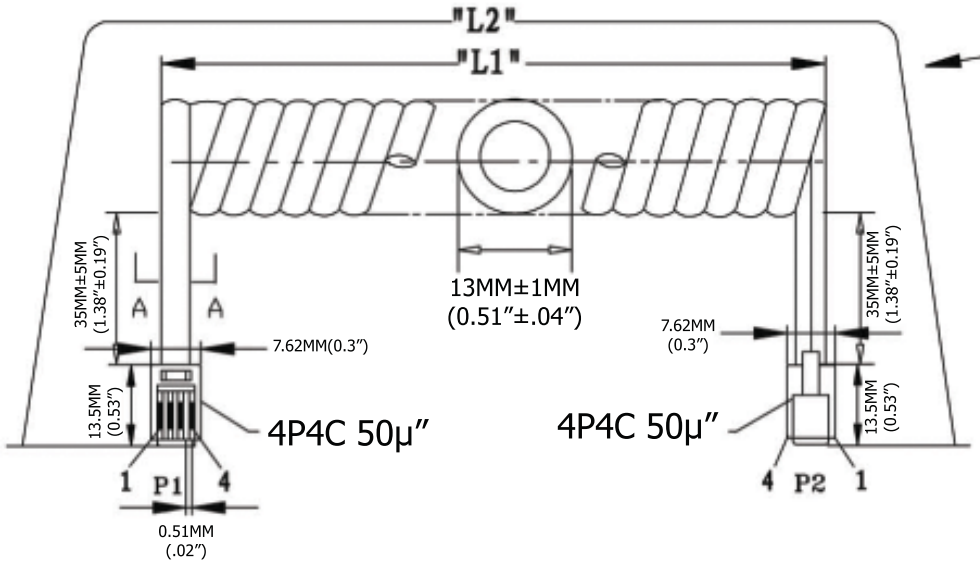


**TERMINATION:**

| P1 | P2 | COLOR |
|---|---|---|
| 1 | 4 | BLACK |
| 2 | 3 | RED |
| 3 | 2 | GREEN |
| 4 | 1 | YELLOW |

| Extended Length ("L2") | Typical Retracted Length ("L1") |
|---|---|
| 300.0 Inches - 345.0 Inches | 75.0 Inches |
| 7,620.0MM-8,763.0MM | 1,905.0MM |

**Material:**

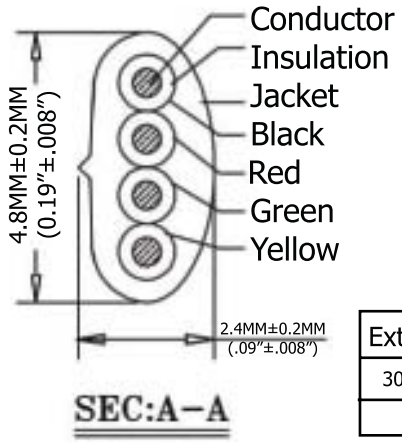- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36"[0.14MM] Thick Phosphor Bronze
- Connector: 50µ" of Selective Gold Contact Plating
  - Area, Gold flash over the remainder
  - Over 2.54µm[.000100] thick nickel underplate
- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X4C): PP6331 ID 0.95-1.0
- Jacke: PVC No UL 80 P
- Package: Individual PE Bag

RoHS Complaint

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Scale | 1:1 | | | | | | | Name |
| TOLERANCE | | | | | | Drawn | 11.02.11 | Chappell |
| X.X | ±0.40 | | | | | Approved | | |
| X.XX | ±0.25 | | | | | | | |
| X.XXX | ±0.15 | | | | | | | |
| Angle | ±3° | | | | | | | |
| | | | Modification | Date | Name | | | |

ASSMANN WSW components

**Item No.**
**AT-C-26-4/4/B-25-R**

**Title**
NON-UL 26 AWG (0.12X12)*6C, O.D.: 2.4*4.8MM, Standard Plug, 50µ" of contact plating, BLACK

Drawing No.

**rev00**

Replace

Sheet