



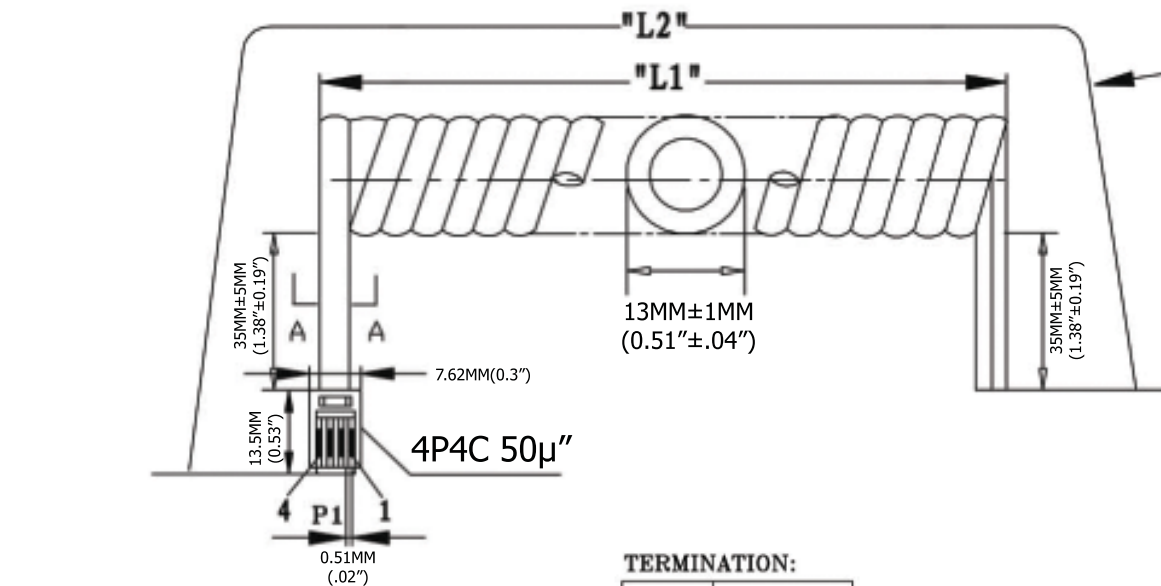

Extended length is with 500g of force

TERMINATION:	
P1	COLOR
1	BLACK
2	RED
3	GREEN
4	YELLOW

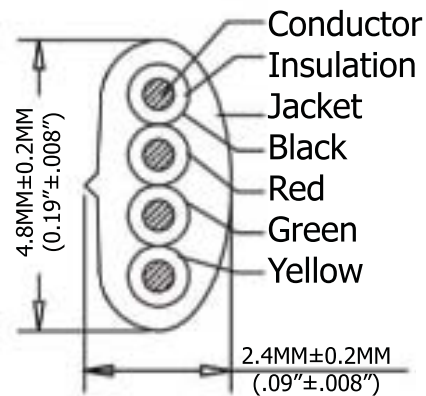

Extended Length ("L2")	Typical Retracted Length ("L1")
300.0 Inches - 345.0 Inches	75.0 Inches
7,620.0MM-8,763.0MM	1,905.0MM

Material:

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36"[0.14MM] Thick Phosphor Bronze
- Connector: 50μ" of Selective Gold Contact Plating
 - Area, Gold flash over the remainder
 - Over 2.54μm[.000100] thick nickel underplate
- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X4C): PP6331 ID 0.95-1.0
- Jack: PVC No UL 80 P
- Package: Individual PE Bag

SEC:A-A

Scale	1:1							Name
TOLERANCE						Drawn	11.02.11	Chappel
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°					 		
			Modification	Date	Name			

Item No.	Item Description	Unit	Quantity	Unit Price	Total Price
----------	------------------	------	----------	------------	-------------

AT-C-26-4/4/S-25-OE-R

Title	NON-UL 26AWG (0.12X12)*4C, O.D.: 2.4*4.8MM, Single Plug, 50μ" of contact plating, SILVER
-------	---

Drawing No.	
-------------	--

rev00

Replace

Sheet

RoHS Complaint

ASSMANN
components