

A

B

C


D

E

F

G

H

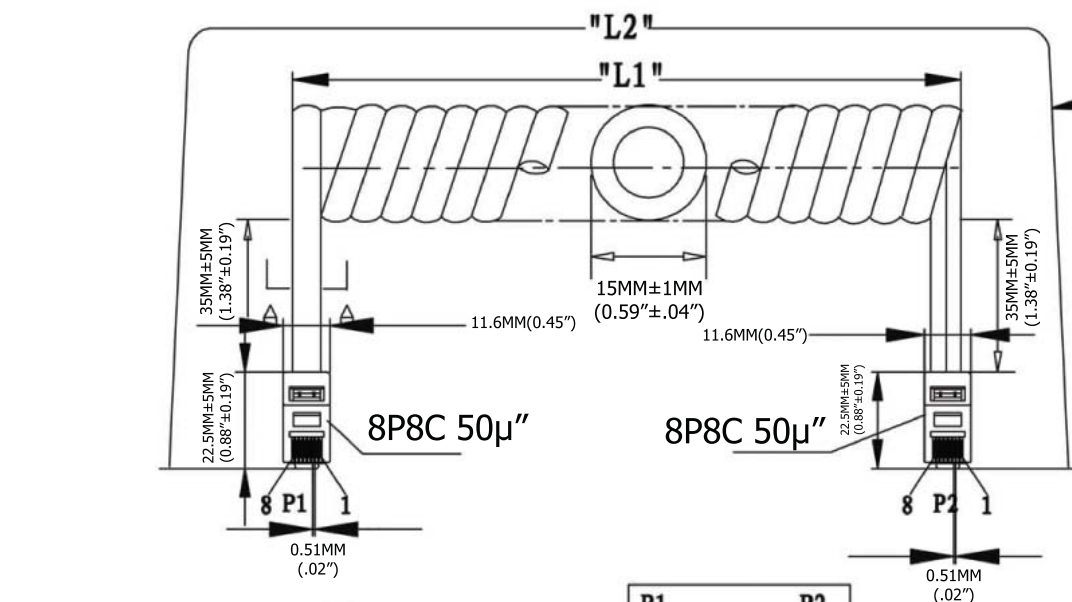


Extended length is with 500g of force

Material:

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36"[0.14MM] Thick Phosphor Bronze
- Connector: 50μ" of Selective Gold Contact Plating
 - Area, Gold flash over the remainder
 - Over 2.54μm[.000100] thick nickel underplate
- Conductor(X8C): 26AWG (0.12X12) Bare Copper
- Insulation(X8C): PP6331 ID 0.95-1.0
- Jacke: PVC No UL 80 P
- Package: Individual PE Bag

Electrical:

- Voltage rating: 30V (DC)

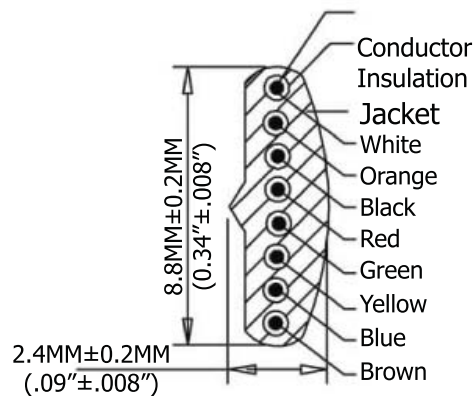

P1		P2
1	WHITE	1
2	ORANGE	2
3	BLACK	3
4	RED	4
5	GREEN	5
6	YELLOW	6
7	BLUE	7
8	BROWN	8

Extended Length ("L2")	Typical Retracted Length ("L1")
300.0 Inches - 345 Inches	126.0 Inches
7,620.0MM-8,763.0MM	3,200.4MM

SEC: A=A

Scale	1:1							Name
TOLERANCE						Drawn	11.02.11	Chappel
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
						 		
			Modification	Date	Name			

Item No.	Item Description	Unit	Quantity	Rate	Amount
----------	------------------	------	----------	------	--------

AT-C-26-8/8/W-25/R-R

	Title
--	-------

NON-UL 26AWG (0.16/7)*8C, O.D.: 2.4*8.8MM,
Reverse Plug, 50μ" of contact plating, WHITE

Drawing No.

rev00

Replace

Sheet

