



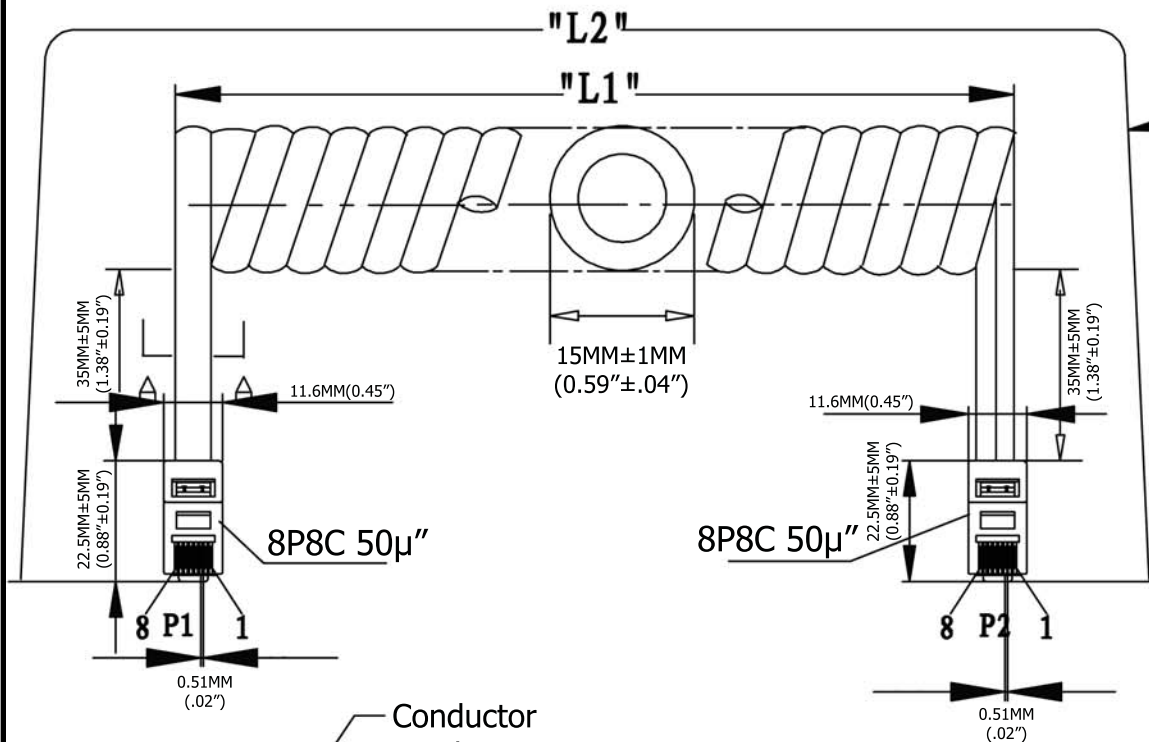

Extended length is with 500g of force

#### Materials:

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36\"[.014MM] Thick Phosphor Bronze
- Connector: 50μ\" of Selective Gold Contact Plating
  - Area, Gold flash over the remainder
  - Over 2.54μm[.000100] thick nickel underplate
- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X4C): PP6331 ID 0.95-1.0
- Jacket: PVC NOUL 80P
- Package: Individual PE Bag

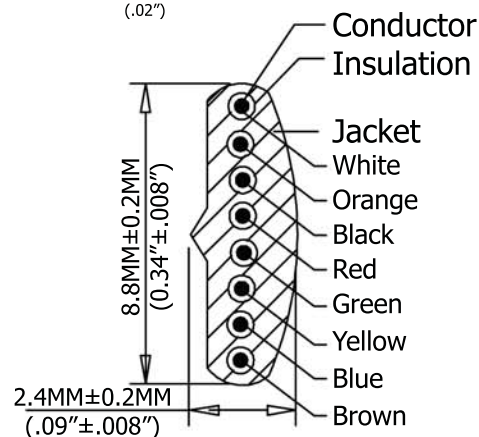

SEC: A-A

| P1 |        | P2 |
|----|--------|----|
| 1  | WHITE  | 1  |
| 2  | ORANGE | 2  |
| 3  | BLACK  | 3  |
| 4  | RED    | 4  |
| 5  | GREEN  | 5  |
| 6  | YELLOW | 6  |
| 7  | BLUE   | 7  |
| 8  | BROWN  | 8  |

| Extended Length ("L2")    | Typical Retracted Length ("L1") |
|---------------------------|---------------------------------|
| 84.0 Inches - 96.6 Inches | 39.5 Inches                     |
| 2,133.6MM-2,453.64MM      | 1,003.3MM                       |

**RoHS**  
Compliant

ITEM NO

**AT-C-26-8/8/W-7/R-R**

TITLE NON-UL 26AWG (0.16/7)\*8C, O.D.: 2.4\*8.8MM

Reverse Plug, 50μ\" of contact plating, WHITE

**ASSMANN**  
Electronics, Inc.

1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283

Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED

© Copyright 2009 by Assmann Electronic Components  
All International Rights Reserved