



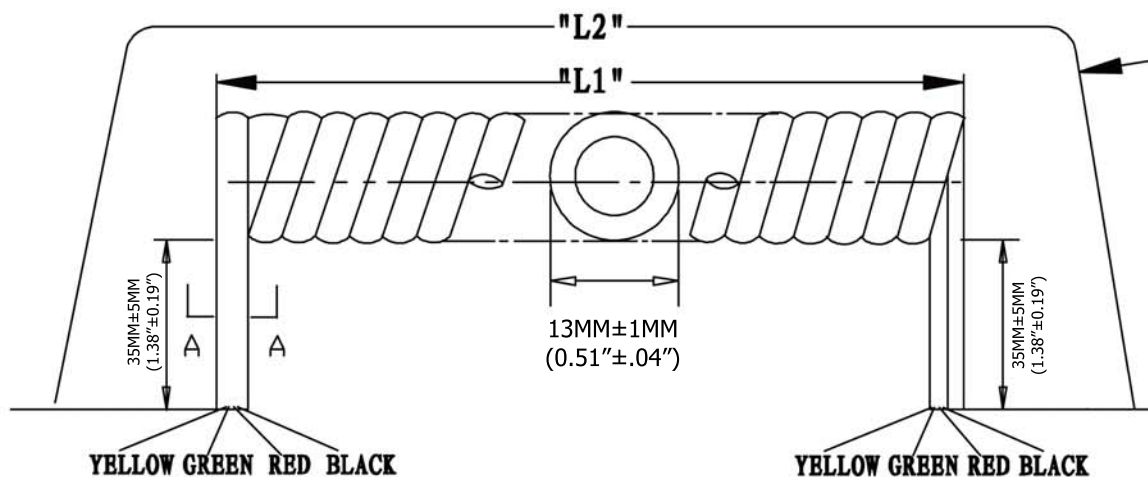

Extended length is with 500g of force

#### Materials:

- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X4C): PP6331 ID 0.95-1.0
- Jacket: PVC NOUL 80P
- Package: Individual PE Bag

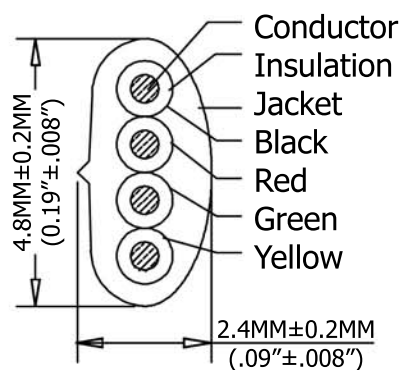

SEC:A-A

| Extended Length ("L2")    | Typical Retracted Length ("L1") |
|---------------------------|---------------------------------|
| 60.0 Inches - 69.0 Inches | 13.0 Inches                     |
| 1,524.0MM-1,752.6MM       | 330.2MM                         |

**RoHS**  
Compliant

ITEM NO

**AT-K-C-26-4-B/5-R**

TITLE NON-UL 26AWG (0.16/7)\*4C, O.D.: 2.4\*4.8MM  
Pre-Cut, 5FT., BLACK

**ASSMANN**  
Electronics, Inc.

1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283

Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED

© Copyright 2009 by Assmann Electronic Components  
All International Rights Reserved