



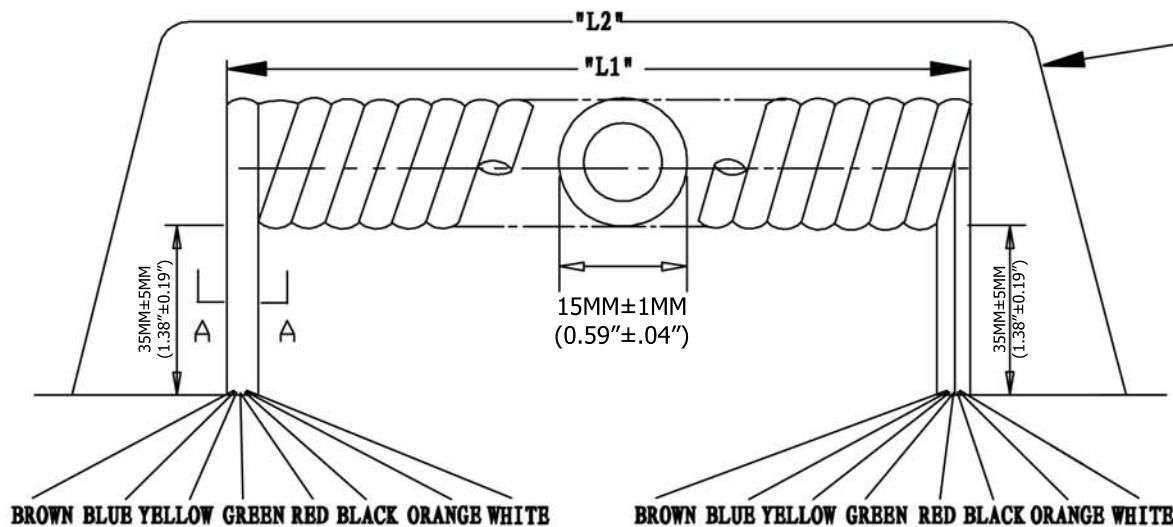

Extended length is with 500g of force

Materials:

- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X4C): PP6331 ID 0.95-1.0
- Jacket: PVC NOUL 80P
- Package: Individual PE Bag

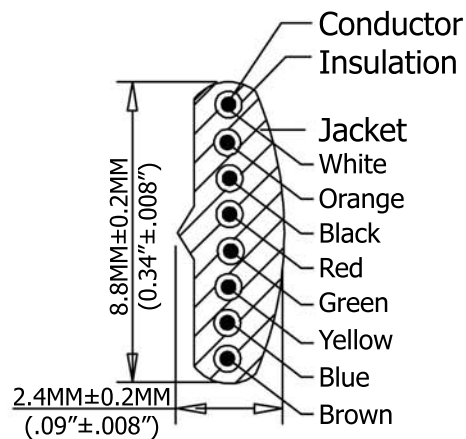

SEC: A-A

Extended Length ("L2")	Typical Retracted Length ("L1")
120.0 Inches - 138.0 Inches	59.04 Inches
3,048.0MM-3,505.2MM	1,499.61MM

RoHS
Compliant

ITEM NO

AT-K-C-26-8-S/10-R

TITLE NON-UL 26AWG (0.16/7)*8C, O.D.: 2.4*8.8MM

Pre-Cut, 10FT., SILVER

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283

Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED

© Copyright 2009 by Assmann Electronic Components
All International Rights Reserved