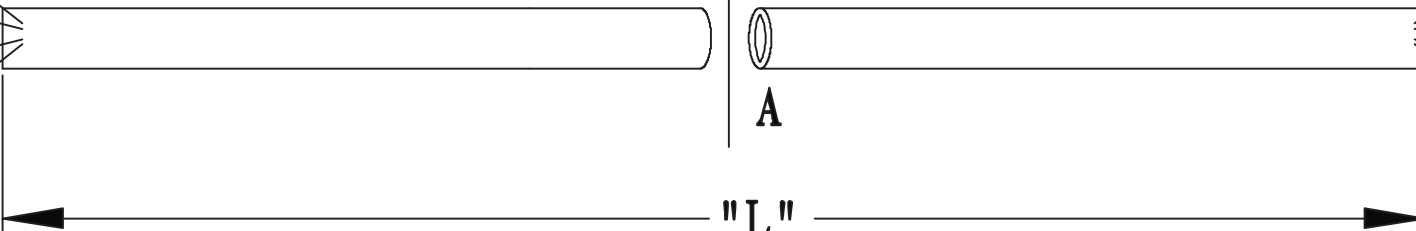
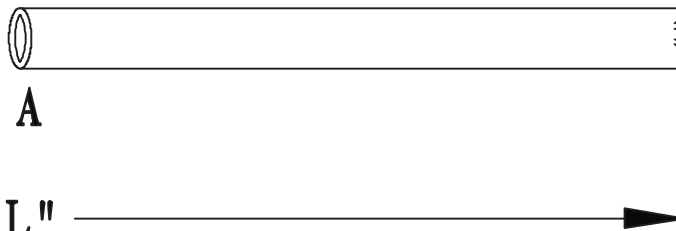
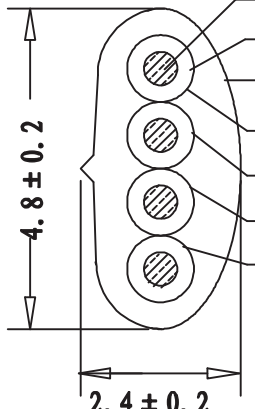





	1	2	3	4	5	6	7																																																																											
A	YELLOW GREEN RED BLACK  YELLOW GREEN RED BLACK 							A																																																																										
B								B																																																																										
C	Conductor: [26AWG(0.16/7)Bare Copper]x4C Insulation: [PP6331 ID:0.95±0.03]x4C Jacket: PVC NOUL 65P  SEC:A-A <table><thead><tr><th>Part Number</th><th>Drawing Number</th><th>Wire Length "L"</th><th>Jacket Color</th><th>Cut Length</th></tr></thead><tbody><tr><td>AT-K-S-26-4-B/7-R</td><td>A</td><td>2,135±30(7ft)</td><td>Black</td><td>2,145-2,155mm</td></tr><tr><td>AT-K-S-26-4-B/14-R</td><td>B</td><td>4,270±60(14ft)</td><td>Black</td><td>4,290-4,300mm</td></tr><tr><td>AT-K-S-26-4-B/25-R</td><td>C</td><td>7,625±100(25ft)</td><td>Black</td><td>7,650-7,660mm</td></tr></tbody></table>							Part Number	Drawing Number	Wire Length "L"	Jacket Color	Cut Length	AT-K-S-26-4-B/7-R	A	2,135±30(7ft)	Black	2,145-2,155mm	AT-K-S-26-4-B/14-R	B	4,270±60(14ft)	Black	4,290-4,300mm	AT-K-S-26-4-B/25-R	C	7,625±100(25ft)	Black	7,650-7,660mm	C																																																						
Part Number	Drawing Number	Wire Length "L"	Jacket Color	Cut Length																																																																														
AT-K-S-26-4-B/7-R	A	2,135±30(7ft)	Black	2,145-2,155mm																																																																														
AT-K-S-26-4-B/14-R	B	4,270±60(14ft)	Black	4,290-4,300mm																																																																														
AT-K-S-26-4-B/25-R	C	7,625±100(25ft)	Black	7,650-7,660mm																																																																														
D								D																																																																										
E	 A Cable tie: L=120mm, Black  B Cable tie: L=140mm, Black  C Cable tie: L=180mm, Black							E																																																																										
F								F																																																																										
G	Unit: mm RoHS Compliant <table><thead><tr><th>Scale</th><th>Free</th><th></th><th></th><th></th><th></th><th>Date</th><th>Name</th><th>Title</th></tr></thead><tbody><tr><td colspan="2">TOLERANCE</td><td></td><td></td><td></td><td>Drawn</td><td>01.07.13</td><td>Wilson</td><td>Modular pre-cut cable - Straight</td></tr><tr><td>X.</td><td>±X</td><td></td><td></td><td></td><td>Approved</td><td>01.07.13</td><td>Groll</td><td>4C, 26AWG, Black, 7-25 feet</td></tr><tr><td>X.X</td><td>±X</td><td></td><td></td><td></td><td></td><td></td><td></td><td>ASSMANN WSW-No.</td></tr><tr><td>X.XX</td><td>±X</td><td></td><td></td><td></td><td></td><td></td><td></td><td>AT-K-S-26-4-B/xx-R</td></tr><tr><td>DIM</td><td>TOL</td><td></td><td></td><td></td><td colspan="3" rowspan="3"> ASSMANN WSW components 1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us </td><td>Drawing-No.</td></tr><tr><td>X.°</td><td>±X°</td><td></td><td></td><td></td><td></td></tr><tr><td>X.X°</td><td>±X°</td><td></td><td></td><td></td><td></td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td>Replace</td><td>Sheet</td></tr></tbody></table>							Scale	Free					Date	Name	Title	TOLERANCE					Drawn	01.07.13	Wilson	Modular pre-cut cable - Straight	X.	±X				Approved	01.07.13	Groll	4C, 26AWG, Black, 7-25 feet	X.X	±X							ASSMANN WSW-No.	X.XX	±X							AT-K-S-26-4-B/xx-R	DIM	TOL				ASSMANN WSW components 1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us			Drawing-No.	X.°	±X°					X.X°	±X°					Angle	TOL	Id.	Modification	Date	Name	Replace	Sheet	G
Scale	Free					Date	Name	Title																																																																										
TOLERANCE					Drawn	01.07.13	Wilson	Modular pre-cut cable - Straight																																																																										
X.	±X				Approved	01.07.13	Groll	4C, 26AWG, Black, 7-25 feet																																																																										
X.X	±X							ASSMANN WSW-No.																																																																										
X.XX	±X							AT-K-S-26-4-B/xx-R																																																																										
DIM	TOL				ASSMANN WSW components 1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us			Drawing-No.																																																																										
X.°	±X°																																																																																	
X.X°	±X°																																																																																	
Angle	TOL	Id.	Modification	Date	Name	Replace	Sheet																																																																											
H								H																																																																										
	1	2	3	4	5	6	7																																																																											