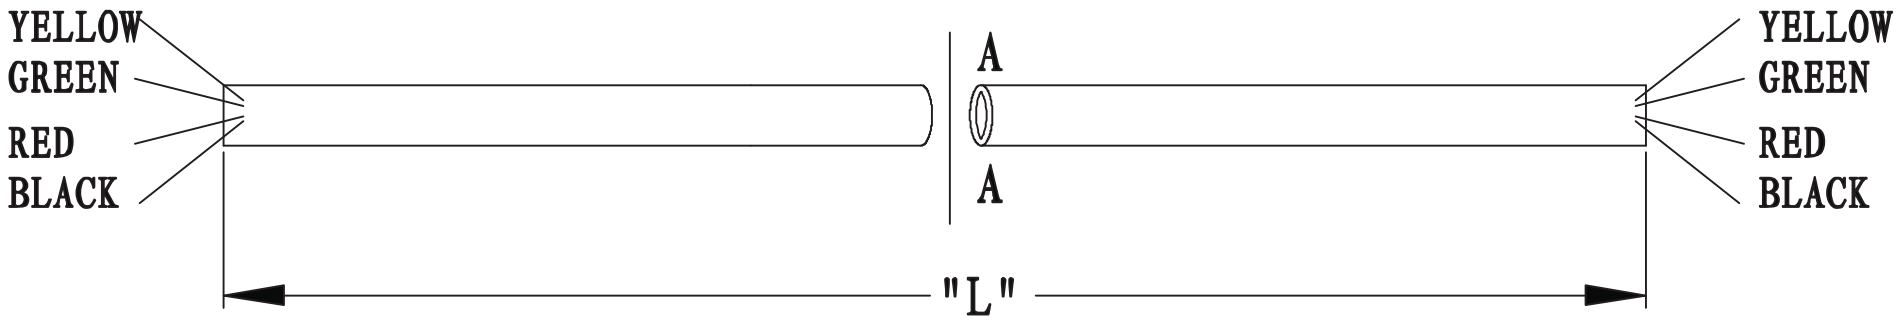

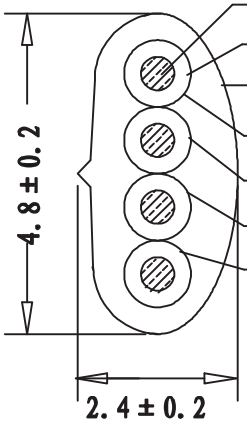

Conductor: [26AWG(0.16/7)Bare Copper]x4C
Insulation: [PP6331 ID:0.95±0.03]x4C
Jacket: PVC NOUL 65P
Black
Red
Green
Yellow

SEC:A−A

Part Number	Drawing Number	Wire Length "L"	Jacket Color	Cut Length
AT-K-S-26-4-W/7-R	A	2,135±30(7ft)	White	2,145-2,155mm
AT-K-S-26-4-W/14-R	B	4,270±60(14ft)	White	4,290-4,300mm
AT-K-S-26-4-W/25-R	C	7,625±100(25ft)	White	7,650-7,660mm



A

Cable tie: L=120mm, White



B

Cable tie: L=140mm, White



C

Cable tie: L=180mm, White

Unit: mm

RoHS Compliant

Scale	Free
TOLERANCE	
X.	±X
X.X	±X
X.XX	±X
DIM	TOL
X.°	±X°
X.X°	±X°
Angle	TOL

Id.	Modification	Date	Name

	Date	Name
Drawn	01.07.13	Wilson
Approved	01.07.13	Groll

ASSMANN WSW components
1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@assmann.us

Title
Modular pre-cut cable - Straight
4C, 26AWG, White, 7-25 feet

ASSMANN WSW-No.
AT-K-S-26-4-W/xx-R

Drawing-No.

rev00

Replace

Sheet
1/1