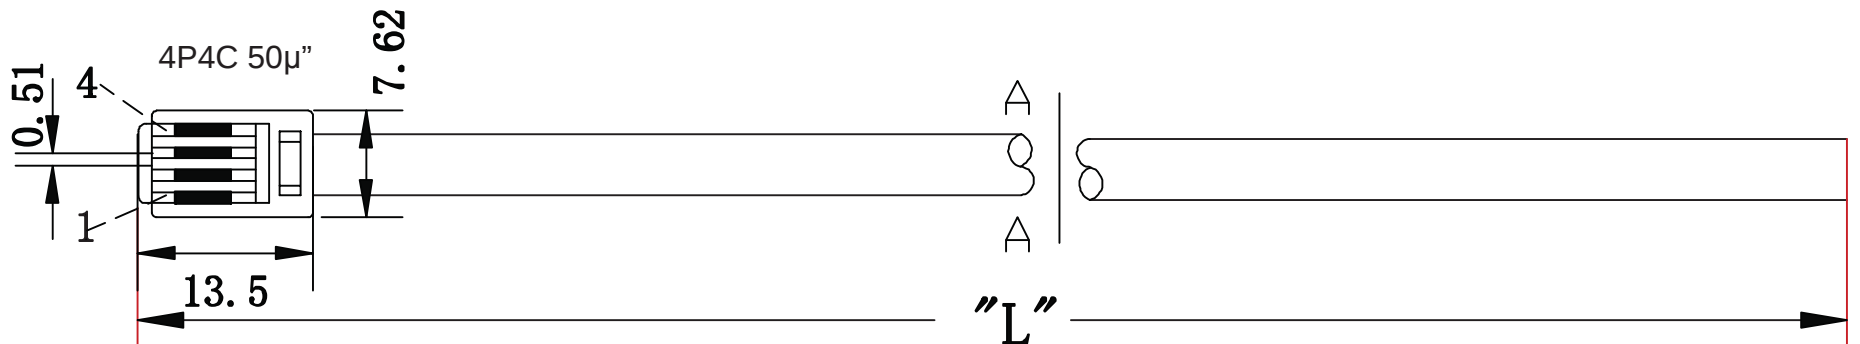


	1	2	3	4	5	6	7																																																																																	
A									A																																																																															
B									B																																																																															
C	Note: - Material: Housing-polycarbonate, clear - Terminal-0.36[.014] thick phosphor bronze. - Thick gold in localized gold plate. - Area, Gold Flash over the remainder. - Over 2.54mm[.000100] thick nickel underplate.								C																																																																															
D	Conductor: [26AWG(0.16/7)Bare Copper]x4C Insulation: [PP6331 ID:0.95±0.03]x4C Jacket: PVC NOUL 65P Black Red Green Yellow 4.8±0.2 2.4±0.2 SEC:A-A <table><tr><td>P1</td><td></td><td>P2</td></tr><tr><td>1</td><td>BLACK</td><td>1</td></tr><tr><td>2</td><td>RED</td><td>2</td></tr><tr><td>3</td><td>GREEN</td><td>3</td></tr><tr><td>4</td><td>YELLOW</td><td>4</td></tr></table> 120±10 A, B, C, D 140±10 E, F, G								P1		P2	1	BLACK	1	2	RED	2	3	GREEN	3	4	YELLOW	4	D																																																																
P1		P2																																																																																						
1	BLACK	1																																																																																						
2	RED	2																																																																																						
3	GREEN	3																																																																																						
4	YELLOW	4																																																																																						
E	<table><thead><tr><th>Part Number</th><th>Drawing Number</th><th>Wire Length "L"</th><th>Jacket Color</th><th>Cut Length</th></tr></thead><tbody><tr><td>AT-S-26-4/4/S-5-OE-R</td><td>A</td><td>1,525±20(5ft)</td><td>Silver</td><td>1,525-1,535mm</td></tr><tr><td>AT-S-26-4/4/S-7-OE-R</td><td>B</td><td>2,135±30(7ft)</td><td>Silver</td><td>2,135-2,145mm</td></tr><tr><td>AT-S-26-4/4/S-10-OE-R</td><td>C</td><td>3,050±60(10ft)</td><td>Silver</td><td>3,050-3,060mm</td></tr><tr><td>AT-S-26-4/4/S-12-OE-R</td><td>D</td><td>3,660±60(12ft)</td><td>Silver</td><td>3,660-3,670mm</td></tr><tr><td>AT-S-26-4/4/S-14-OE-R</td><td>E</td><td>4,270±60(14ft)</td><td>Silver</td><td>4,270-4,280mm</td></tr><tr><td>AT-S-26-4/4/S-25-OE-R</td><td>F</td><td>7,625±100(25ft)</td><td>Silver</td><td>7,625-7,635mm</td></tr><tr><td>AT-S-26-4/4/S-50-OE-R</td><td>G</td><td>15,250±150(50ft)</td><td>Silver</td><td>15,250-15,260mm</td></tr></tbody></table>								Part Number	Drawing Number	Wire Length "L"	Jacket Color	Cut Length	AT-S-26-4/4/S-5-OE-R	A	1,525±20(5ft)	Silver	1,525-1,535mm	AT-S-26-4/4/S-7-OE-R	B	2,135±30(7ft)	Silver	2,135-2,145mm	AT-S-26-4/4/S-10-OE-R	C	3,050±60(10ft)	Silver	3,050-3,060mm	AT-S-26-4/4/S-12-OE-R	D	3,660±60(12ft)	Silver	3,660-3,670mm	AT-S-26-4/4/S-14-OE-R	E	4,270±60(14ft)	Silver	4,270-4,280mm	AT-S-26-4/4/S-25-OE-R	F	7,625±100(25ft)	Silver	7,625-7,635mm	AT-S-26-4/4/S-50-OE-R	G	15,250±150(50ft)	Silver	15,250-15,260mm	E																																							
Part Number	Drawing Number	Wire Length "L"	Jacket Color	Cut Length																																																																																				
AT-S-26-4/4/S-5-OE-R	A	1,525±20(5ft)	Silver	1,525-1,535mm																																																																																				
AT-S-26-4/4/S-7-OE-R	B	2,135±30(7ft)	Silver	2,135-2,145mm																																																																																				
AT-S-26-4/4/S-10-OE-R	C	3,050±60(10ft)	Silver	3,050-3,060mm																																																																																				
AT-S-26-4/4/S-12-OE-R	D	3,660±60(12ft)	Silver	3,660-3,670mm																																																																																				
AT-S-26-4/4/S-14-OE-R	E	4,270±60(14ft)	Silver	4,270-4,280mm																																																																																				
AT-S-26-4/4/S-25-OE-R	F	7,625±100(25ft)	Silver	7,625-7,635mm																																																																																				
AT-S-26-4/4/S-50-OE-R	G	15,250±150(50ft)	Silver	15,250-15,260mm																																																																																				
F									F																																																																															
G	<table><thead><tr><th>Scale</th><th>Free</th><th></th><th></th><th></th><th></th><th>Date</th><th>Name</th><th>Title</th></tr></thead><tbody><tr><td colspan="2">TOLERANCE</td><td></td><td></td><td></td><td></td><td>Drawn</td><td>28.06.13</td><td>Wilson</td></tr><tr><td>X.</td><td>±X</td><td></td><td></td><td></td><td></td><td rowspan="3">Approved</td><td rowspan="3">28.06.13</td><td rowspan="3">Groll</td></tr><tr><td>X.X</td><td>±X</td><td></td><td></td><td></td><td></td></tr><tr><td>X.XX</td><td>±X</td><td></td><td></td><td></td><td></td></tr><tr><td>DIM</td><td>TOL</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.°</td><td>±X°</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.X°</td><td>±X°</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td colspan="3">Drawing-No.</td></tr></tbody></table> Unit: mm RoHS Compliant ASSMANN WSW components 1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us <table><thead><tr><th>Replace</th><th>rev00</th></tr></thead><tbody><tr><td></td><td>Sheet 1/1</td></tr></tbody></table>								Scale	Free					Date	Name	Title	TOLERANCE						Drawn	28.06.13	Wilson	X.	±X					Approved	28.06.13	Groll	X.X	±X					X.XX	±X					DIM	TOL								X.°	±X°								X.X°	±X°								Angle	TOL	Id.	Modification	Date	Name	Drawing-No.			Replace	rev00		Sheet 1/1	G
Scale	Free					Date	Name	Title																																																																																
TOLERANCE						Drawn	28.06.13	Wilson																																																																																
X.	±X					Approved	28.06.13	Groll																																																																																
X.X	±X																																																																																							
X.XX	±X																																																																																							
DIM	TOL																																																																																							
X.°	±X°																																																																																							
X.X°	±X°																																																																																							
Angle	TOL	Id.	Modification	Date	Name	Drawing-No.																																																																																		
Replace	rev00																																																																																							
	Sheet 1/1																																																																																							
H									H																																																																															
	1	2	3	4	5	6	7																																																																																	