


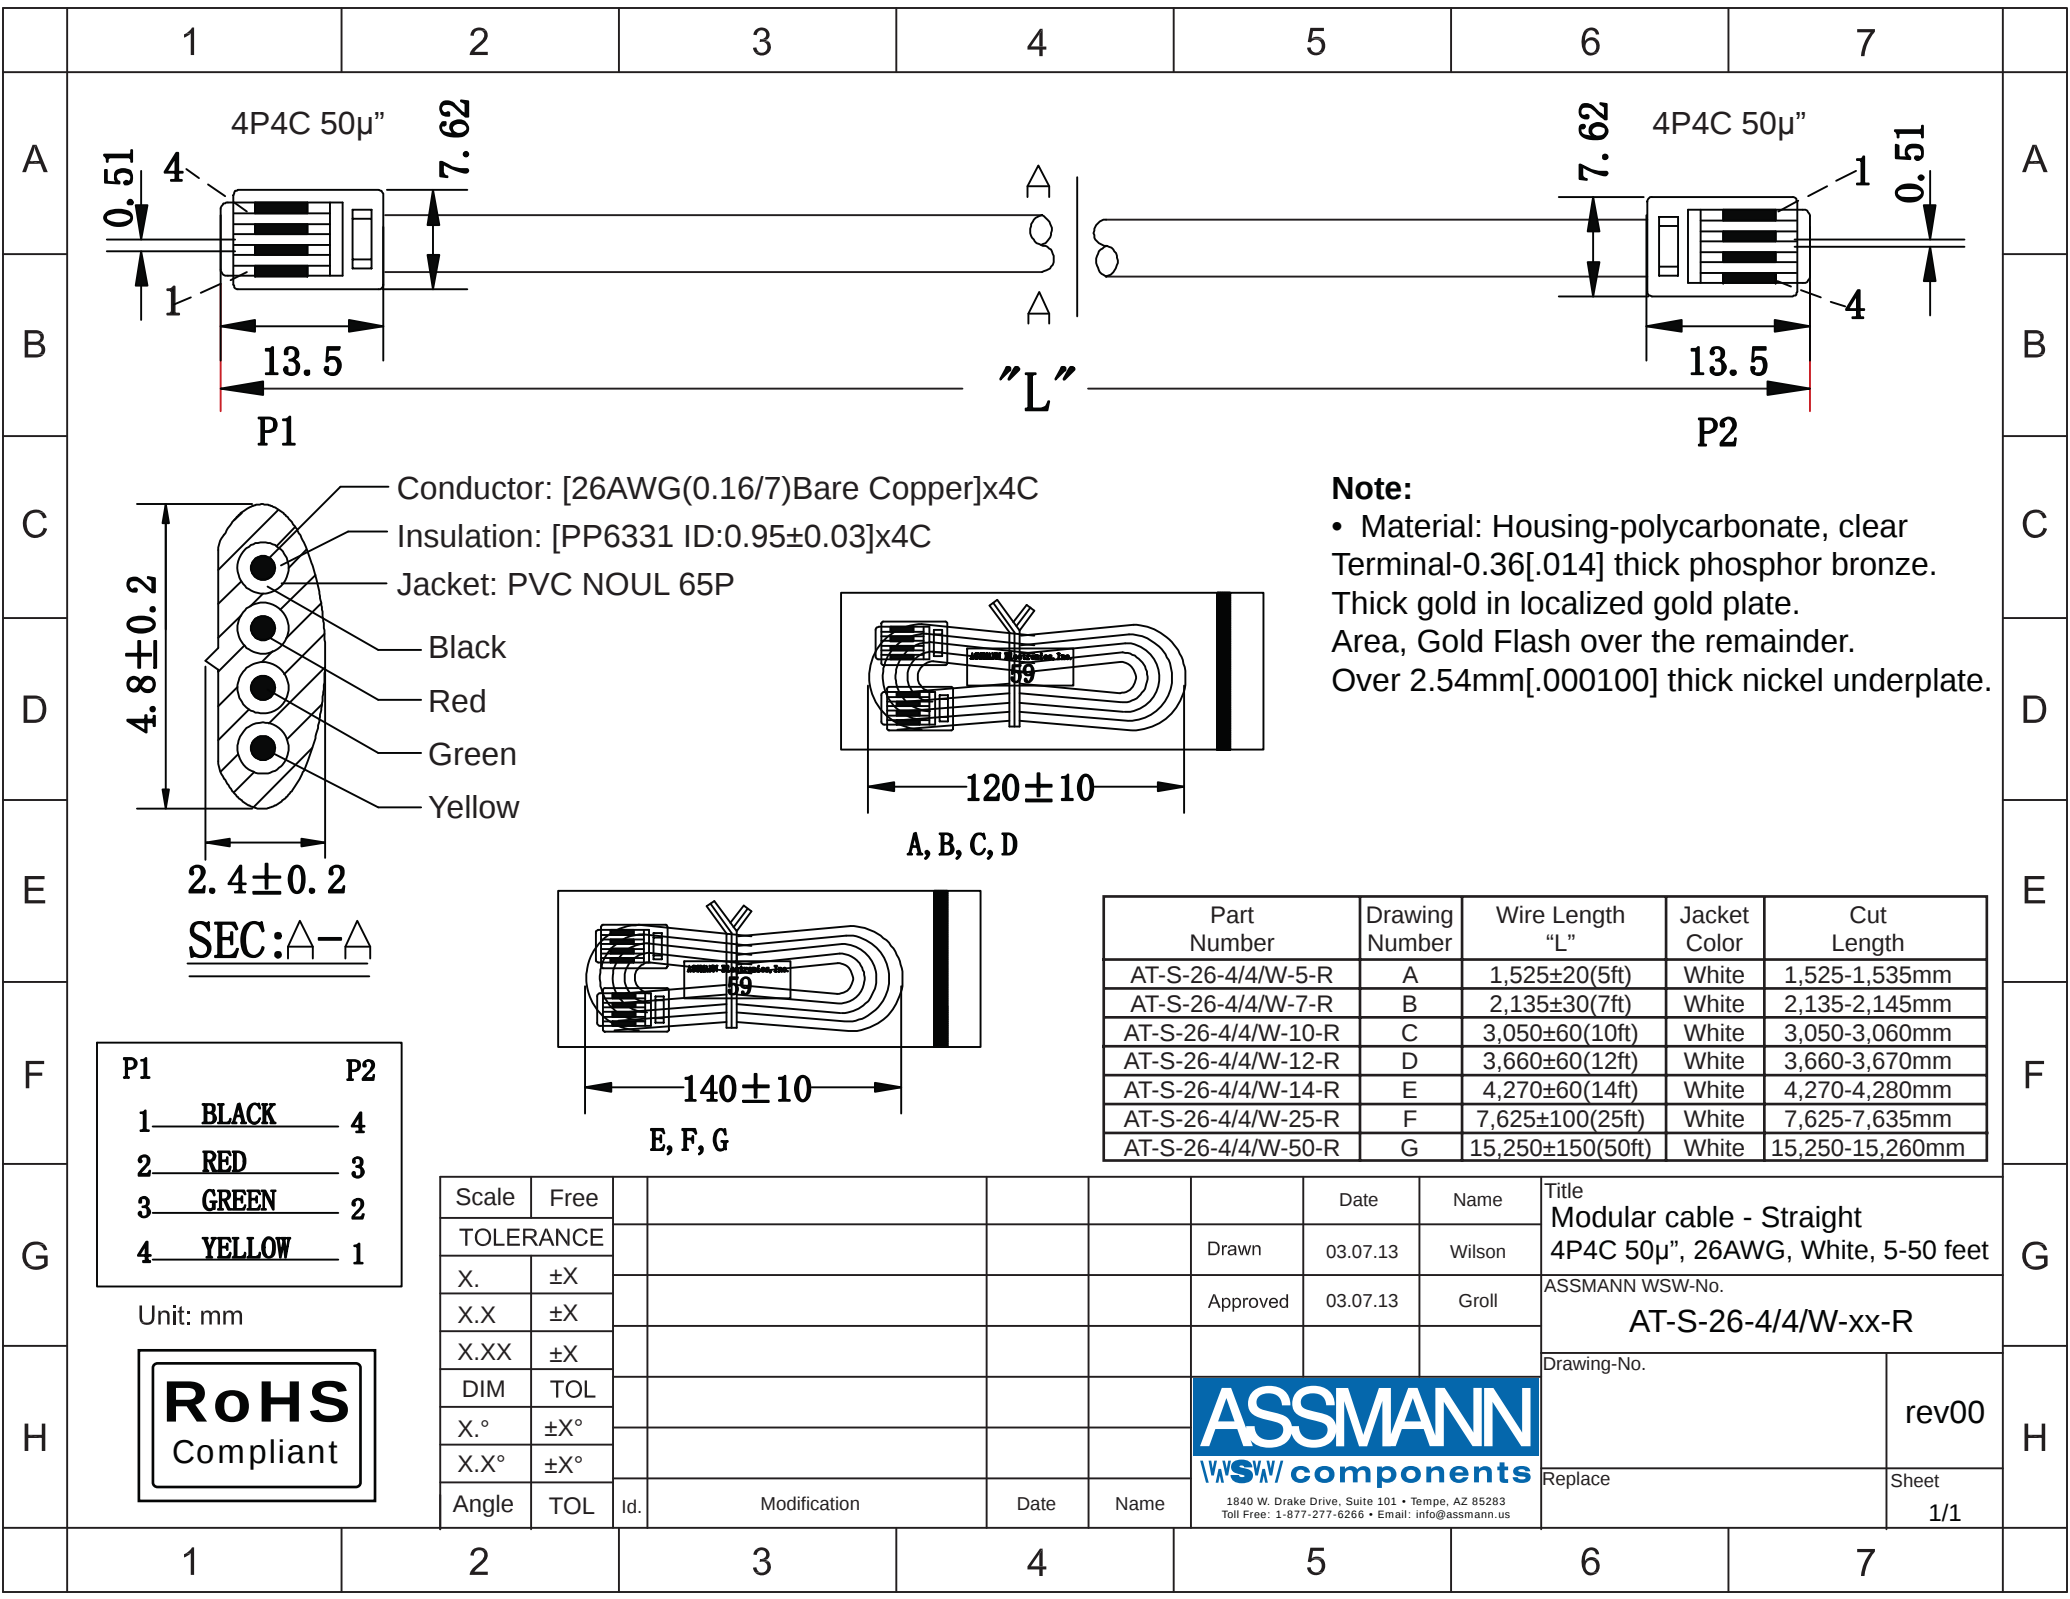

4P4C 50μ"

4P4C 50μ"

P1

P2

"L"

Conductor: [26AWG(0.16/7)Bare Copper]x4C

Insulation: [PP6331 ID:0.95±0.03]x4C

Jacket: PVC NOUL 65P

Black

Red

Green

Yellow

Note:

- Material: Housing-polycarbonate, clear Terminal-0.36[.014] thick phosphor bronze. Thick gold in localized gold plate. Area, Gold Flash over the remainder. Over 2.54mm[.000100] thick nickel underplate.

SEC:A-A

P1		P2
1	BLACK	4
2	RED	3
3	GREEN	2
4	YELLOW	1

Unit: mm

RoHS
Compliant

Scale	Free						Date	Name	Title
TOLERANCE						Drawn	03.07.13	Wilson	Modular cable - Straight 4P4C 50μ", 26AWG, White, 5-50 feet
X.	±X					Approved	03.07.13	Groll	ASSMANN WSW-No.
X.X	±X								AT-S-26-4/4/W-xx-R
X.XX	±X								Drawing-No.
DIM	TOL								rev00
X.°	±X°								Replace
X.X°	±X°								Sheet
Angle	TOL	Id.	Modification	Date	Name				1/1

ASSMANN
WSW components

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@assmann.us