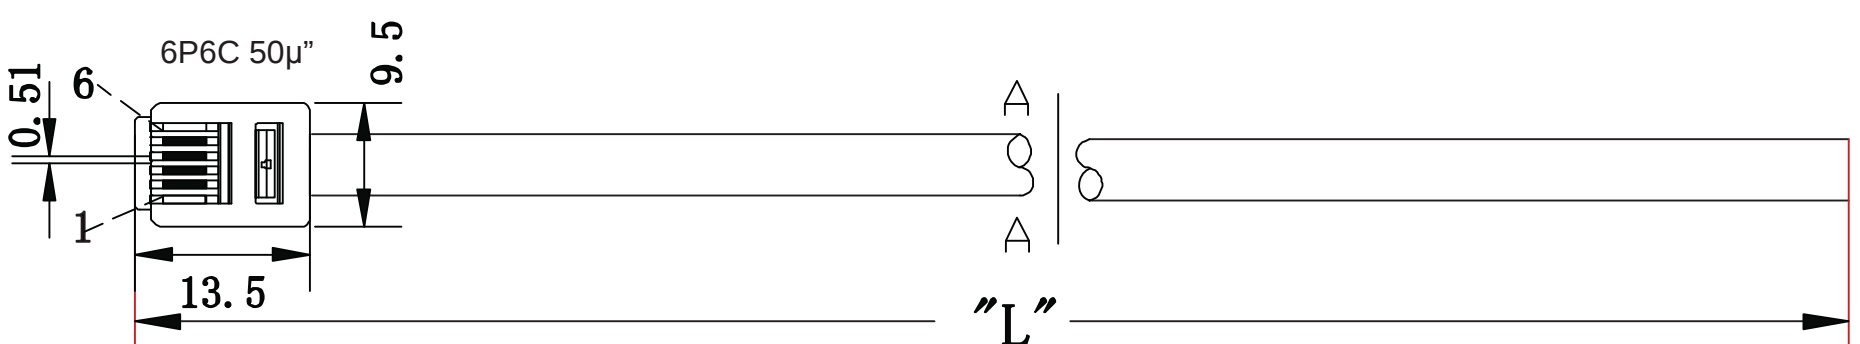
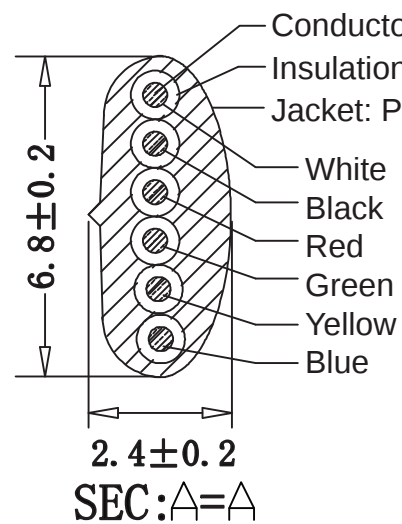




	1	2	3	4	5	6	7																																																																																		
A									A																																																																																
B									B																																																																																
C									C																																																																																
D	 Conductor: [26AWG(0.16/7)Bare Copper]x6C Insulation: [PP6331 ID:0.95±0.03]x6C Jacket: PVC NOUL 65P White Black Red Green Yellow Blue 6.8±0.2 2.4±0.2 SEC:△=△ <table><tr><th>P1</th><th>COLOR</th></tr><tr><td>1</td><td>WHITE</td></tr><tr><td>2</td><td>BLACK</td></tr><tr><td>3</td><td>RED</td></tr><tr><td>4</td><td>GREEN</td></tr><tr><td>5</td><td>YELLOW</td></tr><tr><td>6</td><td>BLUE</td></tr></table>  A, B, C, D  E, F, G Note: • Material: Housing-polycarbonate, clear Terminal-0.36[.014] thick phosphor bronze. Thick gold in localized gold plate. Area, Gold Flash over the remainder. Over 2.54mm[.000100] thick nickel underplate. <table><thead><tr><th>Part Number</th><th>Drawing Number</th><th>Wire Length "L"</th><th>Jacket Color</th><th>Cut Length</th></tr></thead><tbody><tr><td>AT-S-26-6/6/B-5-OE-R</td><td>A</td><td>1,525±20(5ft)</td><td>Black</td><td>1,525-1,535mm</td></tr><tr><td>AT-S-26-6/6/B-7-OE-R</td><td>B</td><td>2,135±30(7ft)</td><td>Black</td><td>2,135-2,145mm</td></tr><tr><td>AT-S-26-6/6/B-10-OE-R</td><td>C</td><td>3,050±60(10ft)</td><td>Black</td><td>3,050-3,060mm</td></tr><tr><td>AT-S-26-6/6/B-12-OE-R</td><td>D</td><td>3,660±60(12ft)</td><td>Black</td><td>3,660-3,670mm</td></tr><tr><td>AT-S-26-6/6/B-14-OE-R</td><td>E</td><td>4,270±60(14ft)</td><td>Black</td><td>4,270-4,280mm</td></tr><tr><td>AT-S-26-6/6/B-25-OE-R</td><td>F</td><td>7,625±100(25ft)</td><td>Black</td><td>7,625-7,635mm</td></tr><tr><td>AT-S-26-6/6/B-50-OE-R</td><td>G</td><td>15,250±150(50ft)</td><td>Black</td><td>15,250-15,260mm</td></tr></tbody></table>								P1	COLOR	1	WHITE	2	BLACK	3	RED	4	GREEN	5	YELLOW	6	BLUE	Part Number	Drawing Number	Wire Length "L"	Jacket Color	Cut Length	AT-S-26-6/6/B-5-OE-R	A	1,525±20(5ft)	Black	1,525-1,535mm	AT-S-26-6/6/B-7-OE-R	B	2,135±30(7ft)	Black	2,135-2,145mm	AT-S-26-6/6/B-10-OE-R	C	3,050±60(10ft)	Black	3,050-3,060mm	AT-S-26-6/6/B-12-OE-R	D	3,660±60(12ft)	Black	3,660-3,670mm	AT-S-26-6/6/B-14-OE-R	E	4,270±60(14ft)	Black	4,270-4,280mm	AT-S-26-6/6/B-25-OE-R	F	7,625±100(25ft)	Black	7,625-7,635mm	AT-S-26-6/6/B-50-OE-R	G	15,250±150(50ft)	Black	15,250-15,260mm	D																										
P1									COLOR																																																																																
1									WHITE																																																																																
2	BLACK																																																																																								
3	RED																																																																																								
4	GREEN																																																																																								
5	YELLOW																																																																																								
6	BLUE																																																																																								
Part Number	Drawing Number	Wire Length "L"	Jacket Color	Cut Length																																																																																					
AT-S-26-6/6/B-5-OE-R	A	1,525±20(5ft)	Black	1,525-1,535mm																																																																																					
AT-S-26-6/6/B-7-OE-R	B	2,135±30(7ft)	Black	2,135-2,145mm																																																																																					
AT-S-26-6/6/B-10-OE-R	C	3,050±60(10ft)	Black	3,050-3,060mm																																																																																					
AT-S-26-6/6/B-12-OE-R	D	3,660±60(12ft)	Black	3,660-3,670mm																																																																																					
AT-S-26-6/6/B-14-OE-R	E	4,270±60(14ft)	Black	4,270-4,280mm																																																																																					
AT-S-26-6/6/B-25-OE-R	F	7,625±100(25ft)	Black	7,625-7,635mm																																																																																					
AT-S-26-6/6/B-50-OE-R	G	15,250±150(50ft)	Black	15,250-15,260mm																																																																																					
E	E																																																																																								
F	<table><thead><tr><th>Scale</th><th>Free</th><th></th><th></th><th></th><th></th><th>Date</th><th>Name</th><th colspan="2">Title</th></tr></thead><tbody><tr><td colspan="2">TOLERANCE</td><td></td><td></td><td></td><td></td><td>Drawn</td><td>28.06.13</td><td>Wilson</td><td>Modular cable - Straight/Open 6P6C 50μ", 26AWG, Black, 5-50 feet</td></tr><tr><td>X.</td><td>±X</td><td></td><td></td><td></td><td></td><td rowspan="3">Approved</td><td rowspan="3">28.06.13</td><td rowspan="3">Groll</td><td>ASSMANN WSW-No.</td></tr><tr><td>X.X</td><td>±X</td><td></td><td></td><td></td><td></td><td>AT-S-26-6/6/B-xx-OE-R</td></tr><tr><td>X.XX</td><td>±X</td><td></td><td></td><td></td><td></td><td>Drawing-No.</td></tr><tr><td>DIM</td><td>TOL</td><td></td><td></td><td></td><td></td><td colspan="3" rowspan="3"></td><td>rev00</td></tr><tr><td>X.°</td><td>±X°</td><td></td><td></td><td></td><td></td><td>Replace</td><td>Sheet</td></tr><tr><td>X.X°</td><td>±X°</td><td></td><td></td><td></td><td></td><td></td><td>1/1</td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td colspan="4">1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us</td></tr></tbody></table>								Scale	Free					Date	Name	Title		TOLERANCE						Drawn	28.06.13	Wilson	Modular cable - Straight/Open 6P6C 50μ", 26AWG, Black, 5-50 feet	X.	±X					Approved	28.06.13	Groll	ASSMANN WSW-No.	X.X	±X					AT-S-26-6/6/B-xx-OE-R	X.XX	±X					Drawing-No.	DIM	TOL								rev00	X.°	±X°					Replace	Sheet	X.X°	±X°						1/1	Angle	TOL	Id.	Modification	Date	Name	1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us				F
Scale									Free					Date	Name	Title																																																																									
TOLERANCE													Drawn	28.06.13	Wilson	Modular cable - Straight/Open 6P6C 50μ", 26AWG, Black, 5-50 feet																																																																									
X.	±X					Approved	28.06.13	Groll	ASSMANN WSW-No.																																																																																
X.X	±X								AT-S-26-6/6/B-xx-OE-R																																																																																
X.XX	±X								Drawing-No.																																																																																
DIM	TOL								rev00																																																																																
X.°	±X°								Replace	Sheet																																																																															
X.X°	±X°									1/1																																																																															
Angle	TOL	Id.	Modification	Date	Name	1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us																																																																																			
G	Unit: mm 								G																																																																																
H									H																																																																																
									1	2	3	4	5	6	7																																																																										