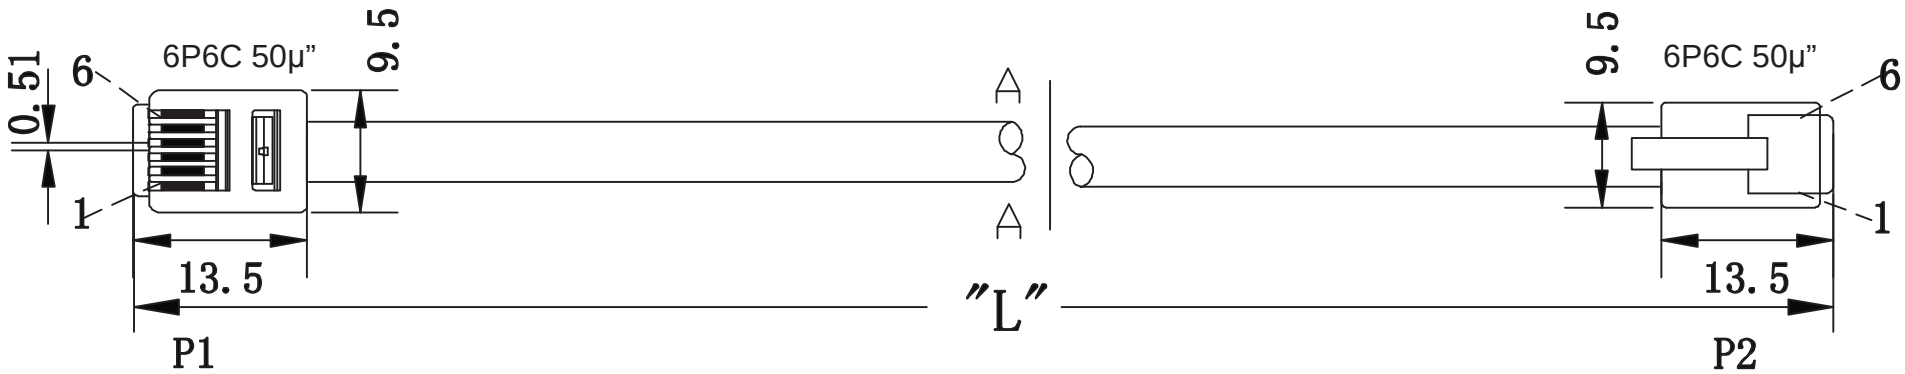

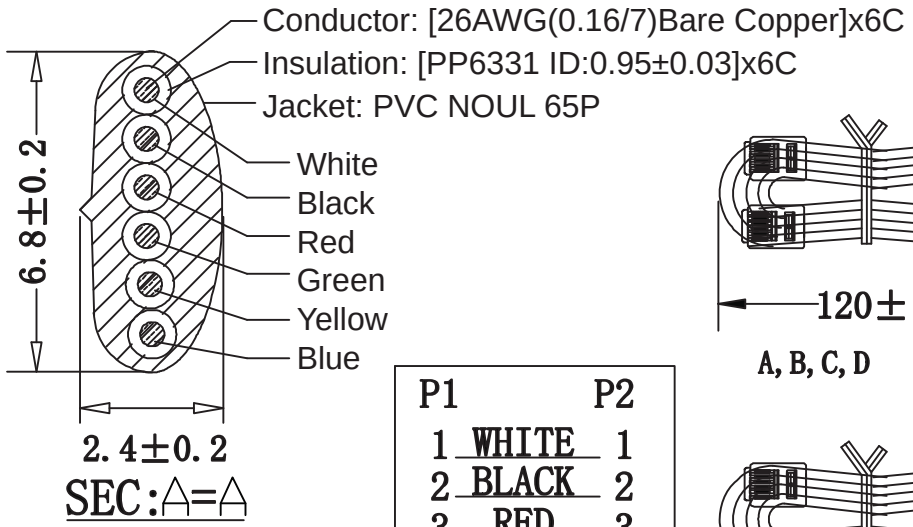

P1		P2
1	WHITE	1
2	BLACK	2
3	RED	3
4	GREEN	4
5	YELLOW	5
6	BLUE	6



A, B, C, D



E, F, G

Note for plug:

- Material: Housing-polycarbonate, clear.

Terminal-0.36[.014] thick phosphor bronze.
Thick gold in localized gold plate.
Area, Gold Flash over the remainder.
Over 2.54mm[.000100] thick nickel underplate.

Part Number	Drawing Number	Wire Length "L"	Jacket Color	Cut Length
AT-S-26-6/6/B-5/R-R	A	1,525±20(5ft)	Black	1,525-1,535mm
AT-S-26-6/6/B-7/R-R	B	2,135±30(7ft)	Black	2,135-2,145mm
AT-S-26-6/6/B-10/R-R	C	3,050±60(10ft)	Black	3,050-3,060mm
AT-S-26-6/6/B-12/R-R	D	3,660±60(12ft)	Black	3,660-3,670mm
AT-S-26-6/6/B-14/R-R	E	4,270±60(14ft)	Black	4,270-4,280mm
AT-S-26-6/6/B-25/R-R	F	7,625±100(25ft)	Black	7,625-7,635mm
AT-S-26-6/6/B-50/R-R	G	15,250±150(50ft)	Black	15,250-15,260mm

Unit: mm

RoHS Compliant

Scale	Free
TOLERANCE	
X.	±X
X.X	±X
X.XX	±X
DIM	TOL
X.°	±X°
X.X°	±X°
Angle	TOL

Id.	Modification	Date	Name

	Date	Name
Drawn	27.06.13	Wilson
Approved	27.06.13	Groll

ASSMANN WSW components
1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@assmann.us

Title
Modular cable - Straight/Reversed
6P6C 50μ", 26AWG, Black, 5-50 feet

ASSMANN WSW-No.
AT-S-26-6/6/B-xx/R-R

Drawing-No.

rev00

Replace

Sheet 1/1