


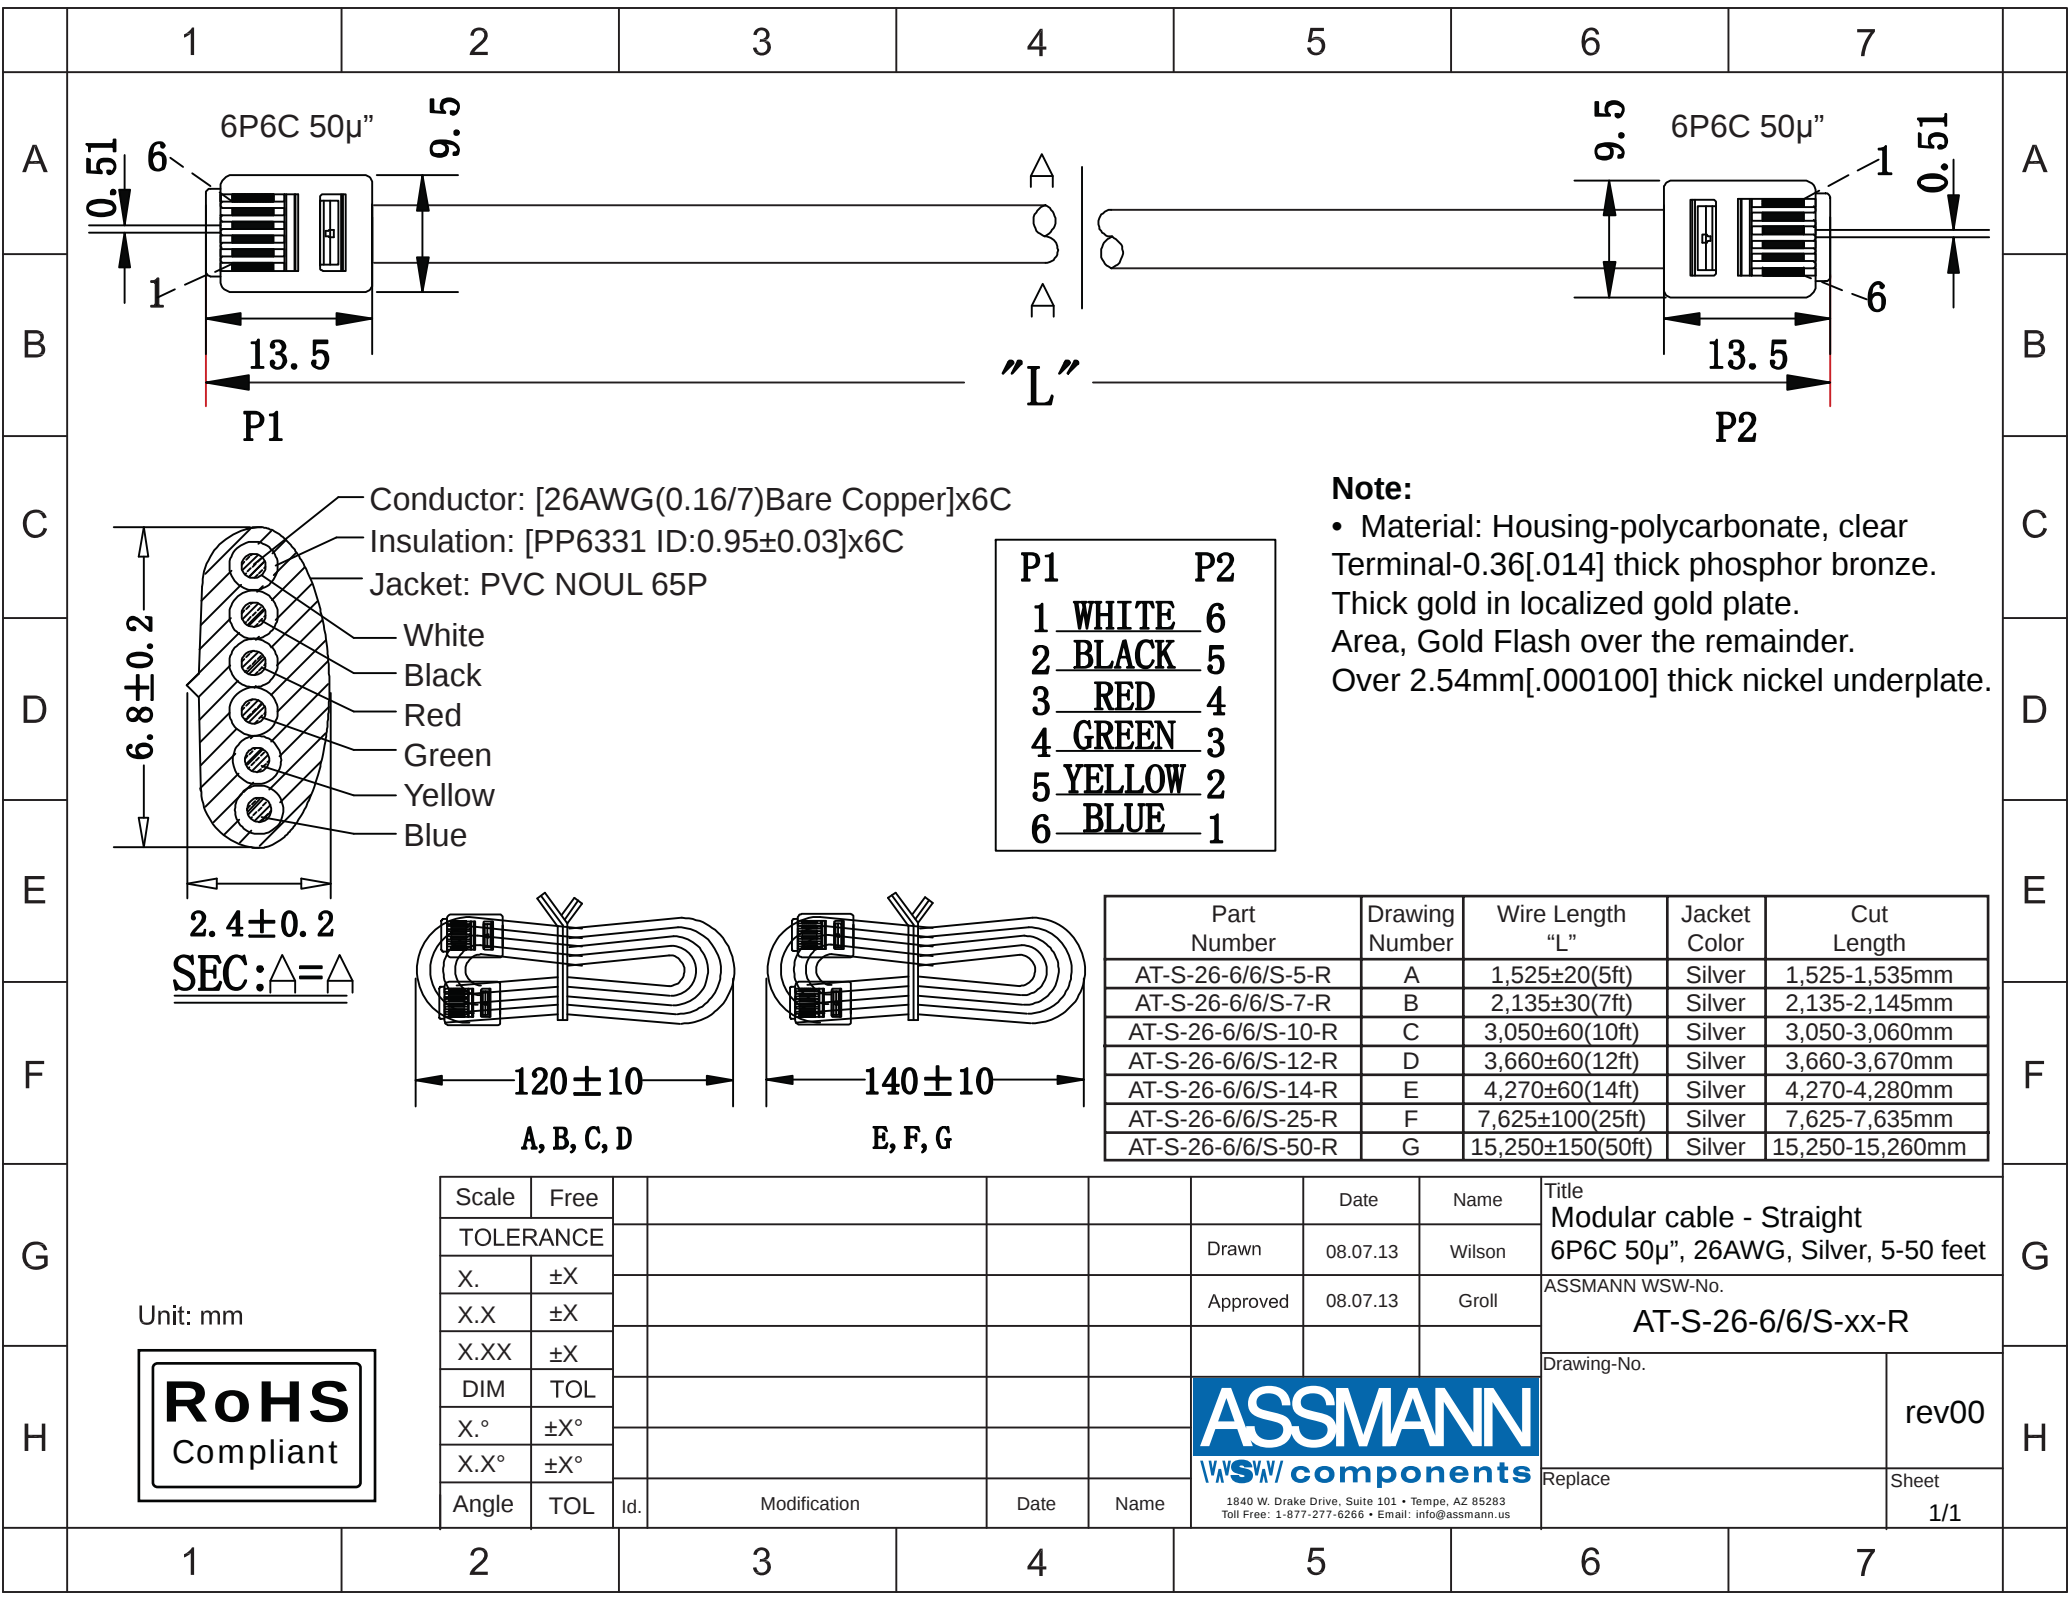

Note:

- Material: Housing-polycarbonate, clear Terminal-0.36[.014] thick phosphor bronze. Thick gold in localized gold plate. Area, Gold Flash over the remainder. Over 2.54mm[.000100] thick nickel underplate.

Part Number	Drawing Number	Wire Length "L"	Jacket Color	Cut Length
AT-S-26-6/6/S-5-R	A	1,525±20(5ft)	Silver	1,525-1,535mm
AT-S-26-6/6/S-7-R	B	2,135±30(7ft)	Silver	2,135-2,145mm
AT-S-26-6/6/S-10-R	C	3,050±60(10ft)	Silver	3,050-3,060mm
AT-S-26-6/6/S-12-R	D	3,660±60(12ft)	Silver	3,660-3,670mm
AT-S-26-6/6/S-14-R	E	4,270±60(14ft)	Silver	4,270-4,280mm
AT-S-26-6/6/S-25-R	F	7,625±100(25ft)	Silver	7,625-7,635mm
AT-S-26-6/6/S-50-R	G	15,250±150(50ft)	Silver	15,250-15,260mm

Scale	Free						Date	Name	Title	
TOLERANCE							Drawn	08.07.13	Wilson	Modular cable - Straight
X.	±X						Approved	08.07.13	Groll	6P6C 50µ", 26AWG, Silver, 5-50 feet
X.X	±X									ASSMANN WSW-No.
X.XX	±X									AT-S-26-6/6/S-xx-R
DIM	TOL						ASSMANN WSW components			Drawing-No.
X.°	±X°									rev00
X.X°	±X°									
Angle	TOL									
		Id.	Modification		Date	Name	1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us			Sheet 1/1

Unit: mm

