


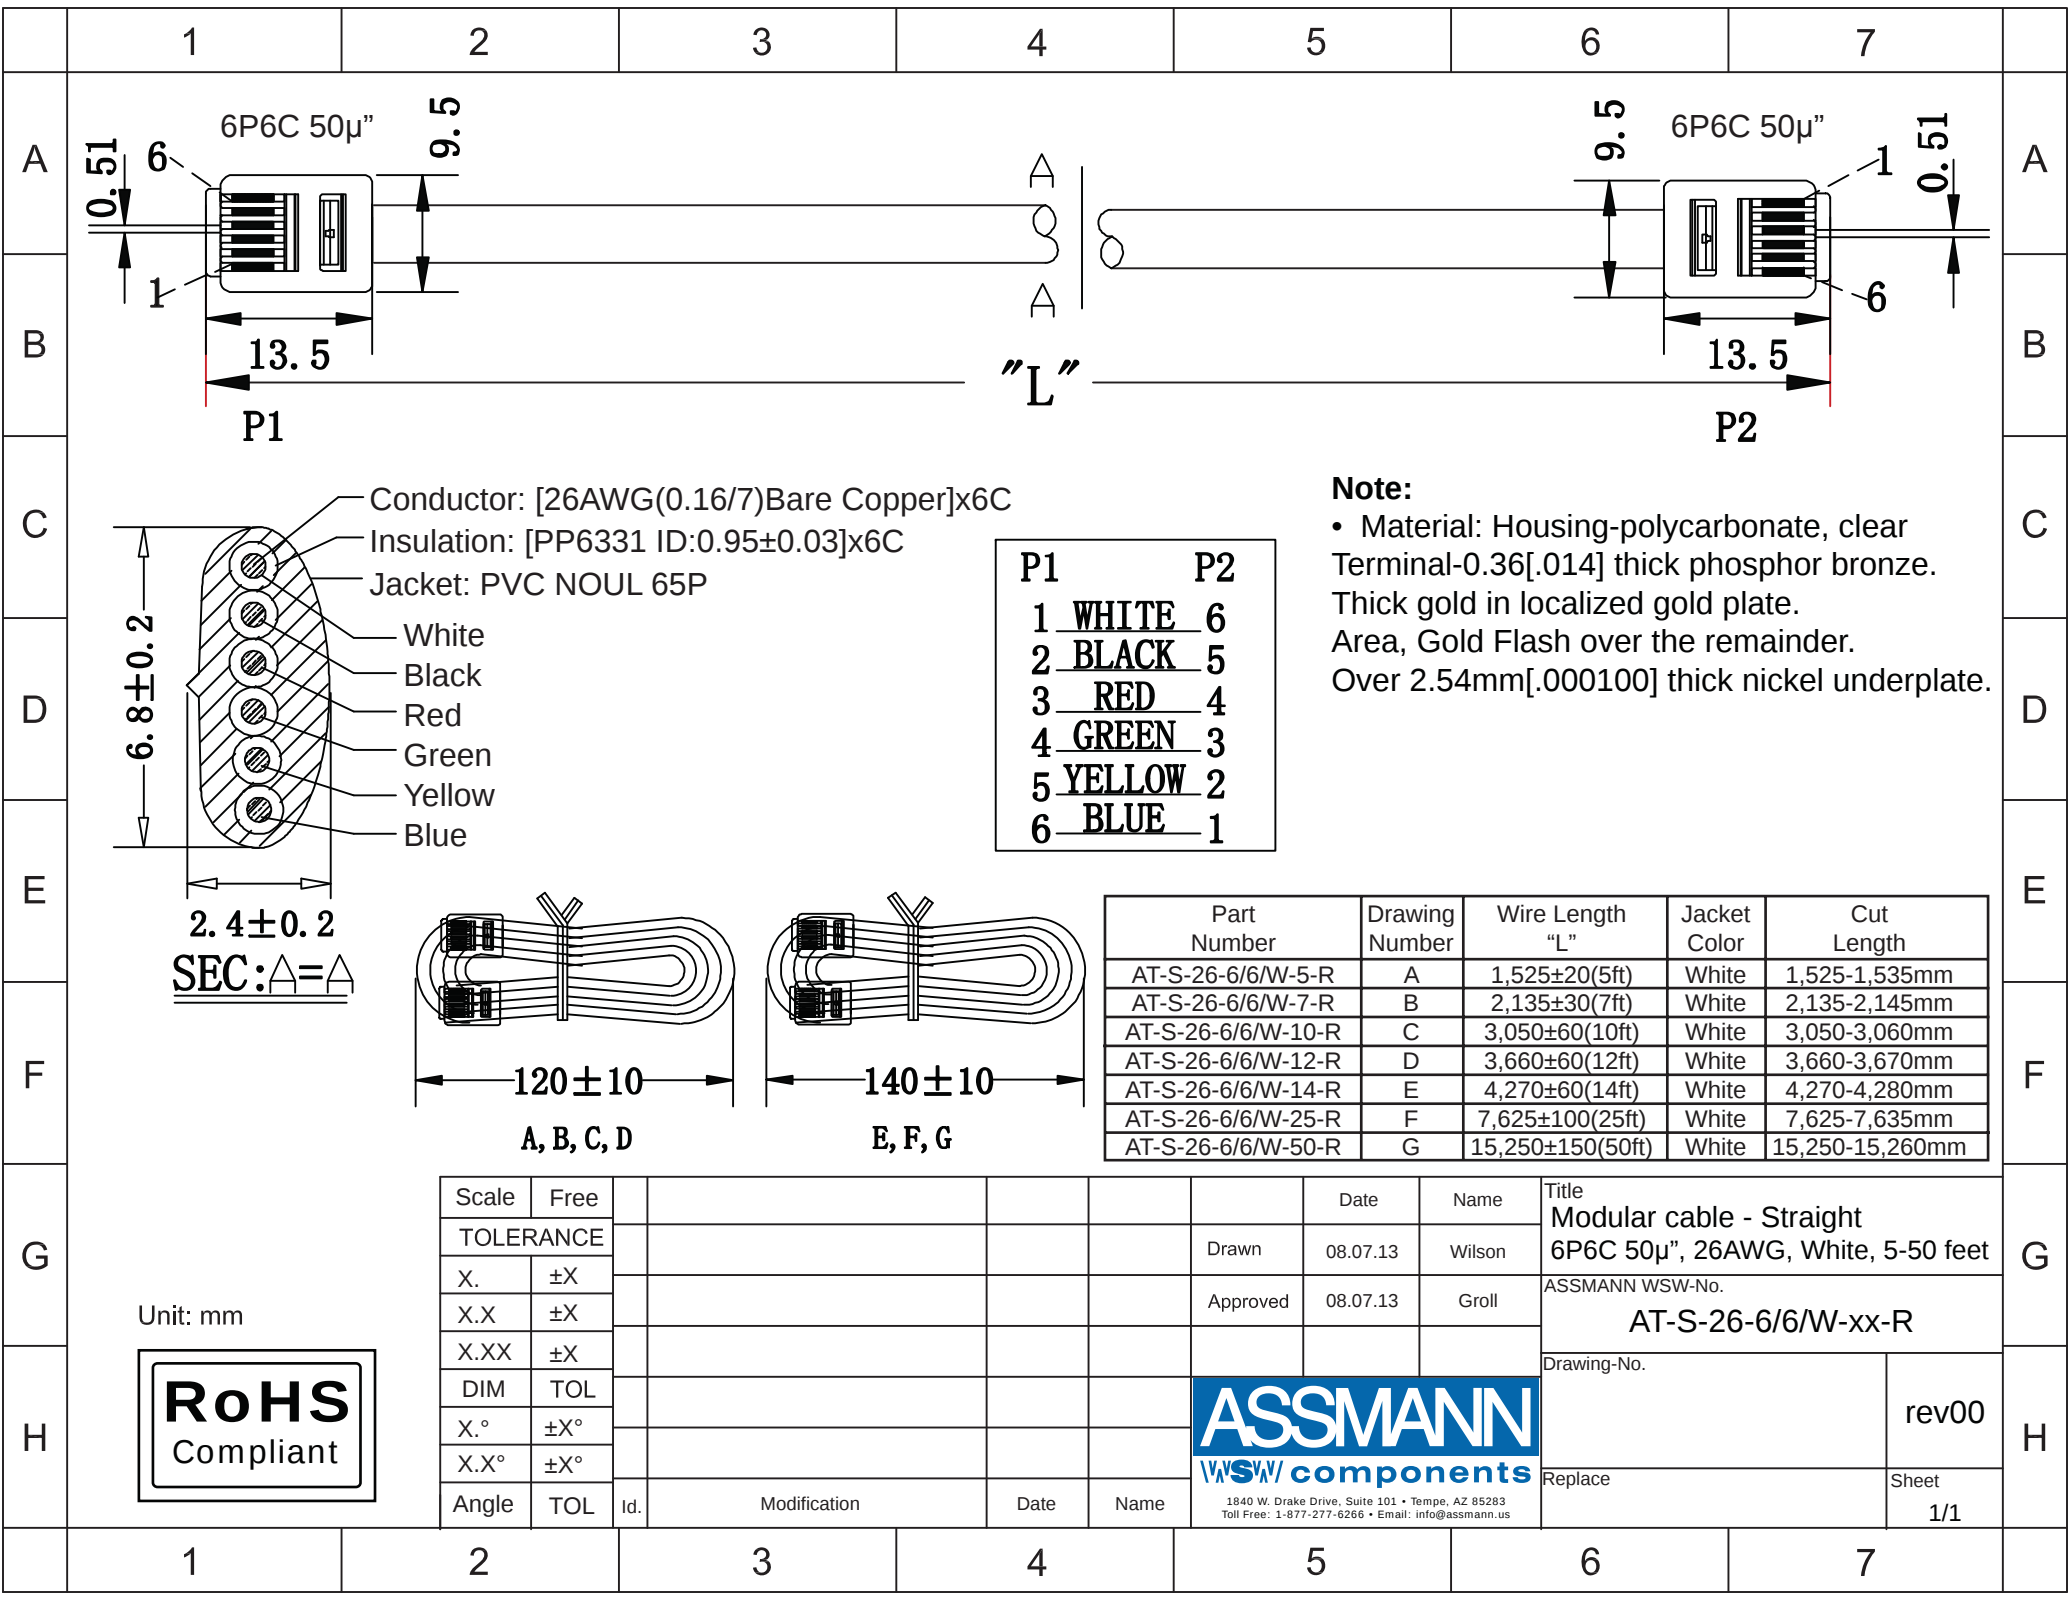

Note:

- Material: Housing-polycarbonate, clear Terminal-0.36[.014] thick phosphor bronze. Thick gold in localized gold plate. Area, Gold Flash over the remainder. Over 2.54mm[.000100] thick nickel underplate.

P1	P2
1 <u>WHITE</u>	6
2 <u>BLACK</u>	5
3 <u>RED</u>	4
4 <u>GREEN</u>	3
5 <u>YELLOW</u>	2
6 <u>BLUE</u>	1

Part Number	Drawing Number	Wire Length "L"	Jacket Color	Cut Length
AT-S-26-6/6/W-5-R	A	1,525±20(5ft)	White	1,525-1,535mm
AT-S-26-6/6/W-7-R	B	2,135±30(7ft)	White	2,135-2,145mm
AT-S-26-6/6/W-10-R	C	3,050±60(10ft)	White	3,050-3,060mm
AT-S-26-6/6/W-12-R	D	3,660±60(12ft)	White	3,660-3,670mm
AT-S-26-6/6/W-14-R	E	4,270±60(14ft)	White	4,270-4,280mm
AT-S-26-6/6/W-25-R	F	7,625±100(25ft)	White	7,625-7,635mm
AT-S-26-6/6/W-50-R	G	15,250±150(50ft)	White	15,250-15,260mm

Scale	Free						Date	Name	Title
TOLERANCE						Drawn	08.07.13	Wilson	Modular cable - Straight 6P6C 50µ", 26AWG, White, 5-50 feet
X.	±X					Approved	08.07.13	Groll	ASSMANN WSW-No.
X.X	±X								AT-S-26-6/6/W-xx-R
X.XX	±X								Drawing-No.
DIM	TOL								rev00
X.°	±X°								
X.X°	±X°								
Angle	TOL	Id.	Modification	Date	Name				Sheet
									1/1

ASSMANN
WSW components
1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@assmann.us

Replace	Sheet
	1/1