

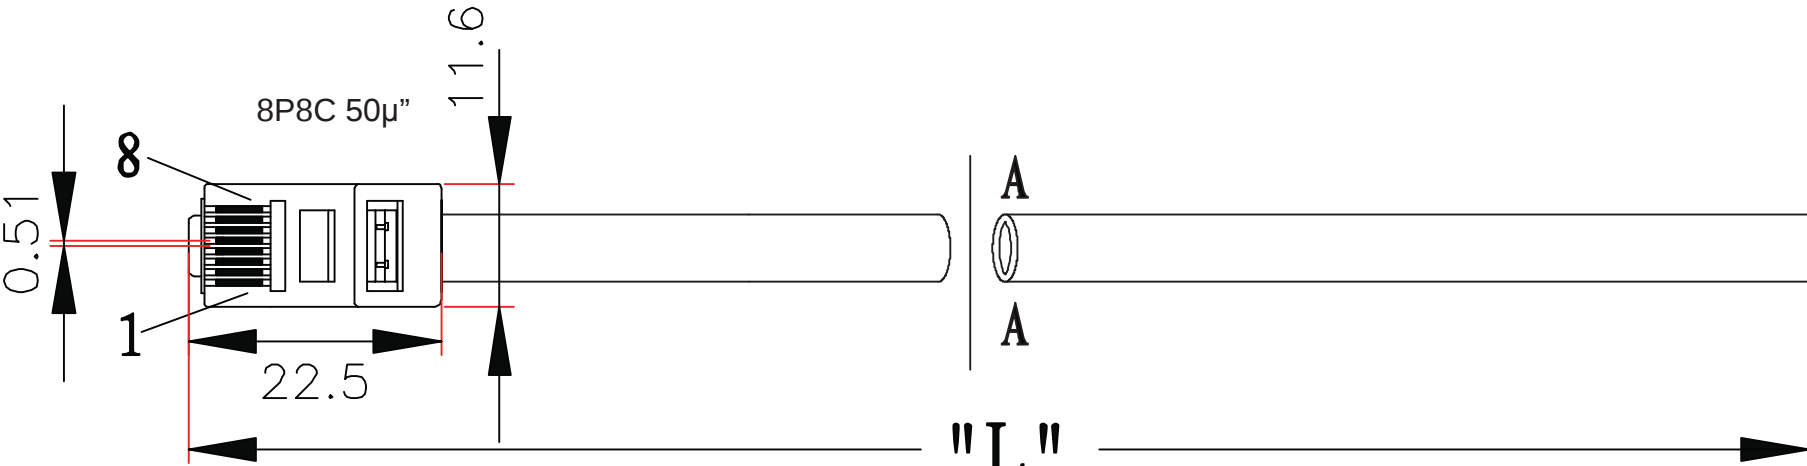
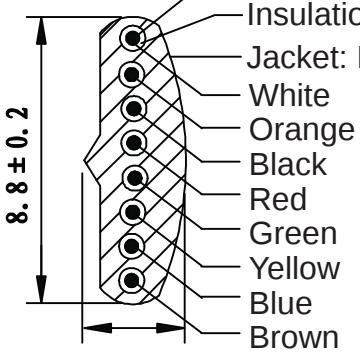


	1	2	3	4	5	6	7																																																																																							
A								A																																																																																						
B								B																																																																																						
C								C																																																																																						
D								D																																																																																						
E	Note: Material: Housing-polycarbonate, clear Terminal-0.36[.014] thick phosphor bronze. Thick gold in localized gold plate. Area, Gold Flash over the remainder. Over 2.54mm[.000100] thick nickel underplate.							E																																																																																						
F								F																																																																																						
G	<table><tr><th>Part Number</th><th>Drawing Number</th><th>Wire Length "L"</th><th>Jacket Color</th><th>Cut Length</th></tr><tr><td>AT-S-26-8/8/B-5-OE-R</td><td>A</td><td>1,525±20(5ft)</td><td>Black</td><td>1,525-1,535mm</td></tr><tr><td>AT-S-26-8/8/B-7-OE-R</td><td>B</td><td>2,135±30(7ft)</td><td>Black</td><td>2,135-2,145mm</td></tr><tr><td>AT-S-26-8/8/B-10-OE-R</td><td>C</td><td>3,050±60(10ft)</td><td>Black</td><td>3,050-3,060mm</td></tr><tr><td>AT-S-26-8/8/B-12-OE-R</td><td>D</td><td>3,660±60(12ft)</td><td>Black</td><td>3,660-3,670mm</td></tr><tr><td>AT-S-26-8/8/B-14-OE-R</td><td>E</td><td>4,270±60(14ft)</td><td>Black</td><td>4,270-4,280mm</td></tr><tr><td>AT-S-26-8/8/B-25-OE-R</td><td>F</td><td>7,625±100(25ft)</td><td>Black</td><td>7,625-7,635mm</td></tr><tr><td>AT-S-26-8/8/B-50-OE-R</td><td>G</td><td>15,250±150(50ft)</td><td>Black</td><td>15,250-15,260mm</td></tr></table>							Part Number	Drawing Number	Wire Length "L"	Jacket Color	Cut Length	AT-S-26-8/8/B-5-OE-R	A	1,525±20(5ft)	Black	1,525-1,535mm	AT-S-26-8/8/B-7-OE-R	B	2,135±30(7ft)	Black	2,135-2,145mm	AT-S-26-8/8/B-10-OE-R	C	3,050±60(10ft)	Black	3,050-3,060mm	AT-S-26-8/8/B-12-OE-R	D	3,660±60(12ft)	Black	3,660-3,670mm	AT-S-26-8/8/B-14-OE-R	E	4,270±60(14ft)	Black	4,270-4,280mm	AT-S-26-8/8/B-25-OE-R	F	7,625±100(25ft)	Black	7,625-7,635mm	AT-S-26-8/8/B-50-OE-R	G	15,250±150(50ft)	Black	15,250-15,260mm	G																																														
Part Number								Drawing Number	Wire Length "L"	Jacket Color	Cut Length																																																																																			
AT-S-26-8/8/B-5-OE-R	A	1,525±20(5ft)	Black	1,525-1,535mm																																																																																										
AT-S-26-8/8/B-7-OE-R	B	2,135±30(7ft)	Black	2,135-2,145mm																																																																																										
AT-S-26-8/8/B-10-OE-R	C	3,050±60(10ft)	Black	3,050-3,060mm																																																																																										
AT-S-26-8/8/B-12-OE-R	D	3,660±60(12ft)	Black	3,660-3,670mm																																																																																										
AT-S-26-8/8/B-14-OE-R	E	4,270±60(14ft)	Black	4,270-4,280mm																																																																																										
AT-S-26-8/8/B-25-OE-R	F	7,625±100(25ft)	Black	7,625-7,635mm																																																																																										
AT-S-26-8/8/B-50-OE-R	G	15,250±150(50ft)	Black	15,250-15,260mm																																																																																										
H	<table><tr><td>Scale</td><td>Free</td><td></td><td></td><td></td><td></td><td>Date</td><td>Name</td><td colspan="2">Title</td></tr><tr><td colspan="2">TOLERANCE</td><td></td><td></td><td></td><td></td><td>Drawn</td><td>01.07.13</td><td>Wilson</td><td>Modular cable - Straight/Open</td></tr><tr><td>X.</td><td>±X</td><td></td><td></td><td></td><td></td><td rowspan="2">Approved</td><td rowspan="2">01.07.13</td><td rowspan="2">Groll</td><td>8P8C 50µ", 26AWG, Black, 5-50 feet</td></tr><tr><td>X.X</td><td>±X</td><td></td><td></td><td></td><td></td><td>ASSMANN WSW-No.</td></tr><tr><td>X.XX</td><td>±X</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>AT-S-26-8/8/B-xx-OE-R</td></tr><tr><td>DIM</td><td>TOL</td><td></td><td></td><td></td><td></td><td colspan="3">Drawing-No.</td><td rowspan="2">rev00</td></tr><tr><td>X.°</td><td>±X°</td><td></td><td></td><td></td><td></td><td colspan="3">Replace</td></tr><tr><td>X.X°</td><td>±X°</td><td></td><td></td><td></td><td></td><td colspan="3"></td><td>Sheet</td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td colspan="3"></td><td>1/1</td></tr></table>							Scale	Free					Date	Name	Title		TOLERANCE						Drawn	01.07.13	Wilson	Modular cable - Straight/Open	X.	±X					Approved	01.07.13	Groll	8P8C 50µ", 26AWG, Black, 5-50 feet	X.X	±X					ASSMANN WSW-No.	X.XX	±X								AT-S-26-8/8/B-xx-OE-R	DIM	TOL					Drawing-No.			rev00	X.°	±X°					Replace			X.X°	±X°								Sheet	Angle	TOL	Id.	Modification	Date	Name				1/1	H
Scale								Free					Date	Name	Title																																																																															
TOLERANCE						Drawn	01.07.13	Wilson	Modular cable - Straight/Open																																																																																					
X.	±X					Approved	01.07.13	Groll	8P8C 50µ", 26AWG, Black, 5-50 feet																																																																																					
X.X	±X								ASSMANN WSW-No.																																																																																					
X.XX	±X								AT-S-26-8/8/B-xx-OE-R																																																																																					
DIM	TOL					Drawing-No.			rev00																																																																																					
X.°	±X°					Replace																																																																																								
X.X°	±X°								Sheet																																																																																					
Angle	TOL	Id.	Modification	Date	Name				1/1																																																																																					
	1	2	3	4	5	6	7																																																																																							



P1	COLOR
1	WHITE
2	ORANGE
3	BLACK
4	RED
5	GREEN
6	YELLOW
7	BLUE
8	BROWN



Unit: mm



1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@assmann.us