


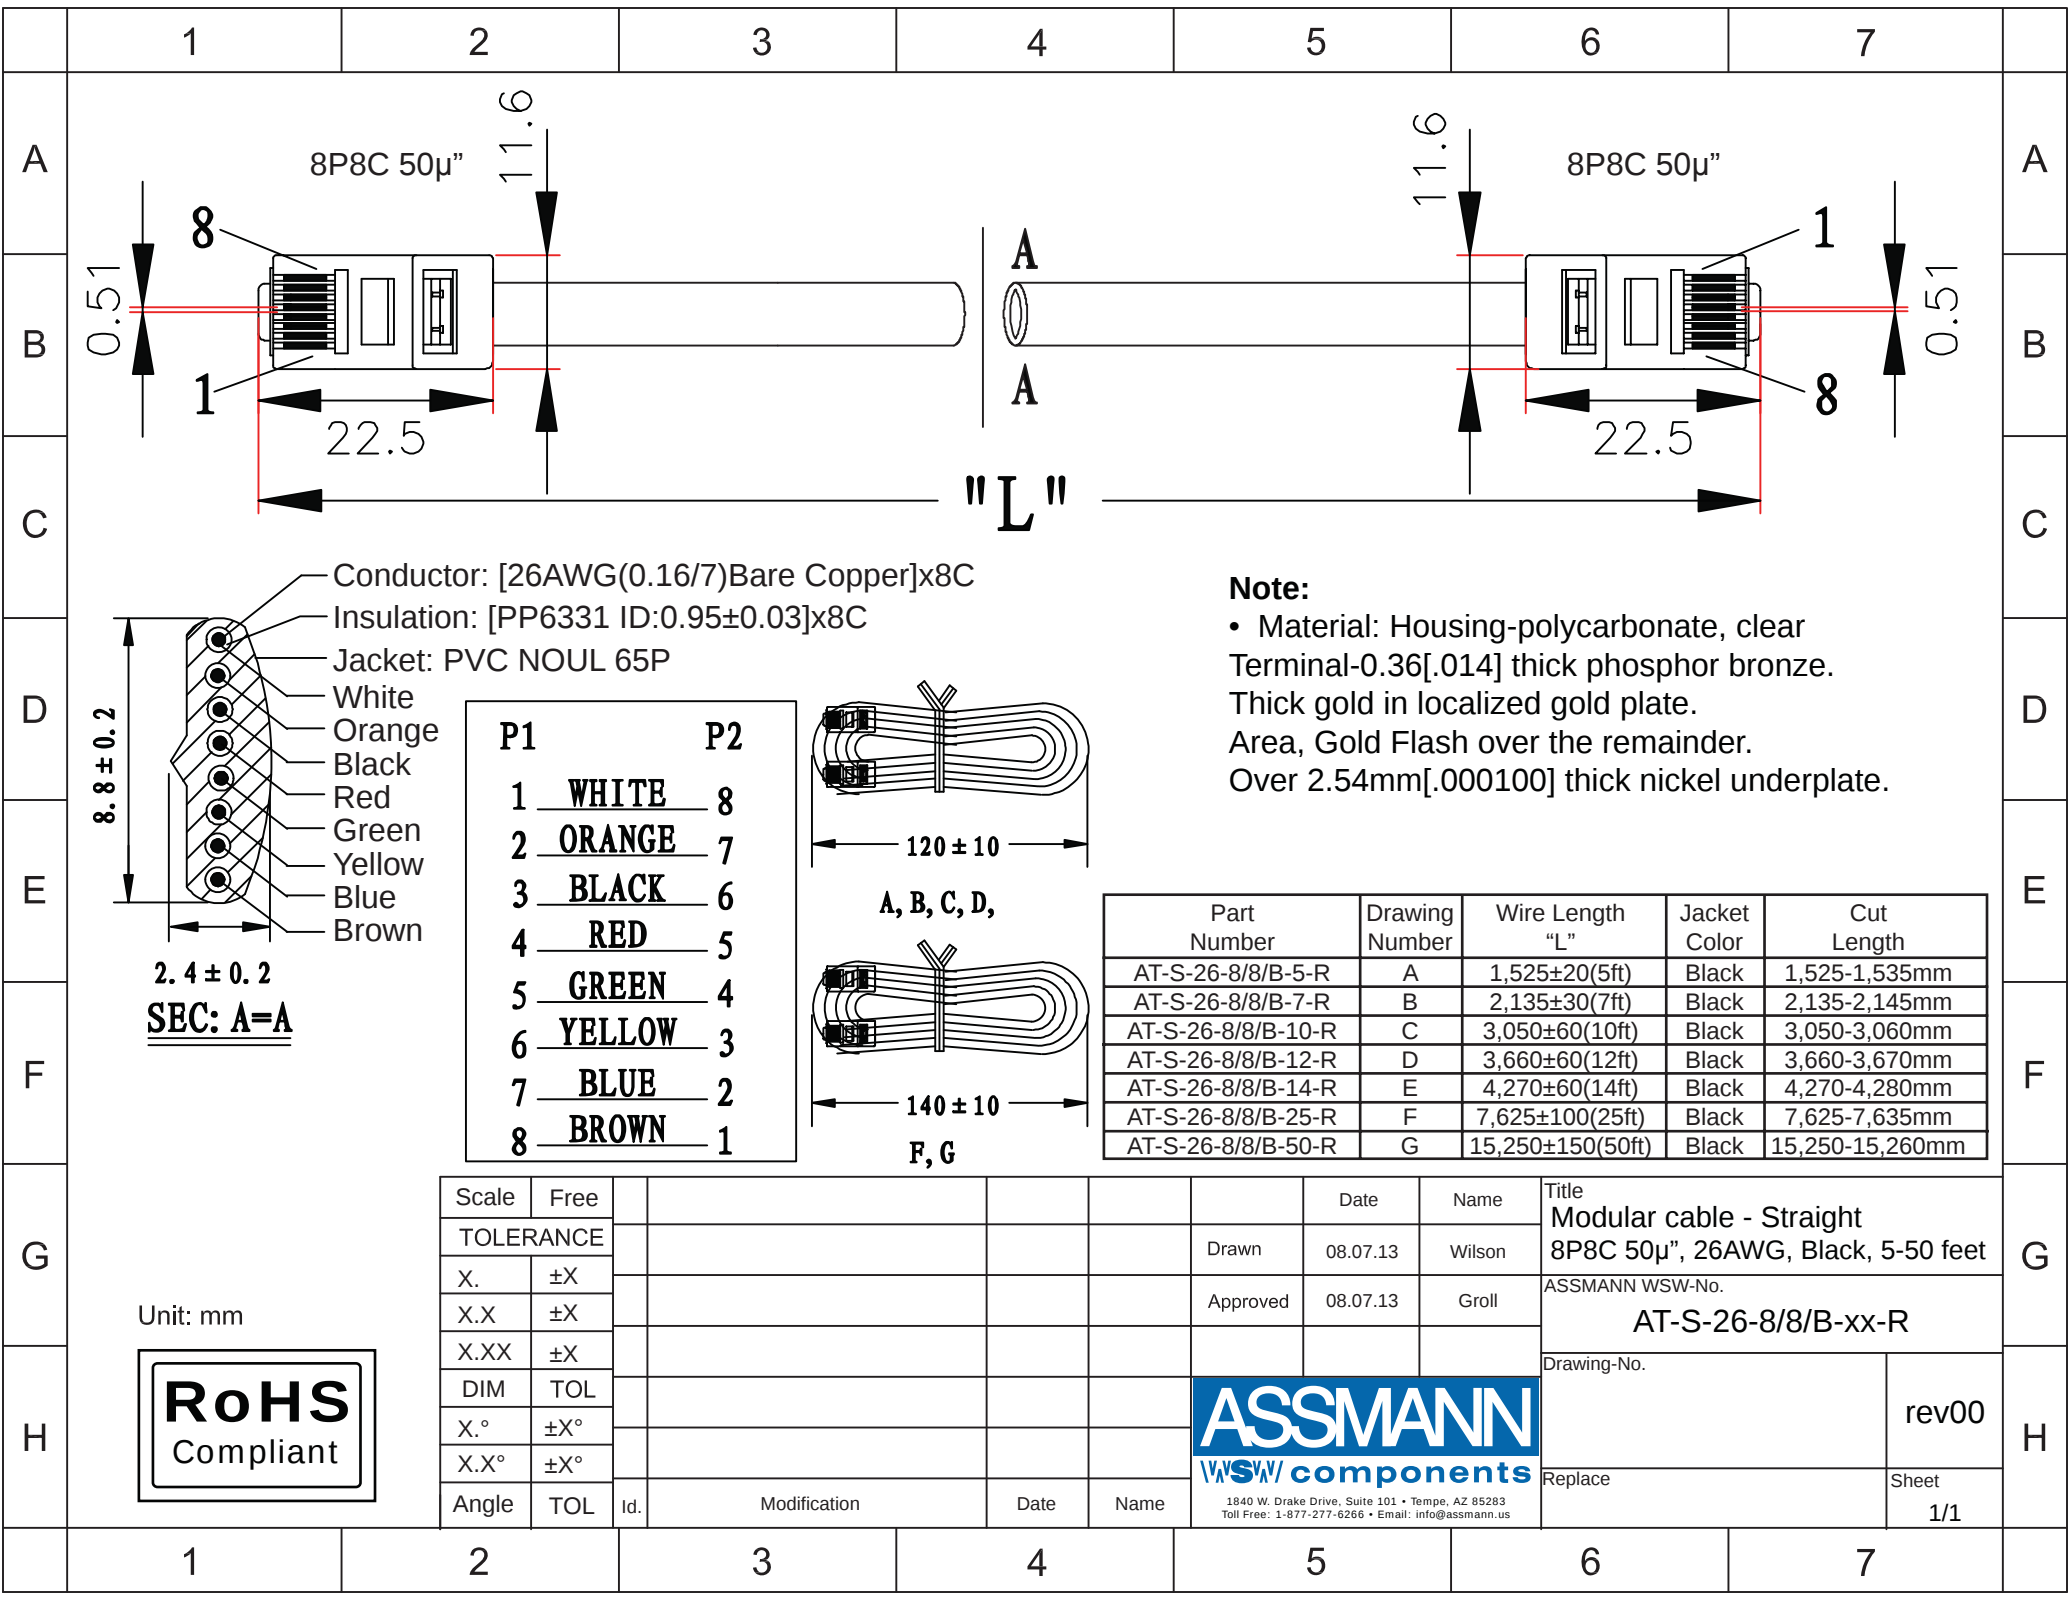


Conductor: [26AWG(0.16/7)Bare Copper]x8C
Insulation: [PP6331 ID:0.95±0.03]x8C
Jacket: PVC NOUL 65P
White
Orange
Black
Red
Green
Yellow
Blue
Brown

8.8 ± 0.2

2.4 ± 0.2
SEC: A=A

P1		P2	
1	WHITE	8	
2	ORANGE	7	
3	BLACK	6	
4	RED	5	
5	GREEN	4	
6	YELLOW	3	
7	BLUE	2	
8	BROWN	1	

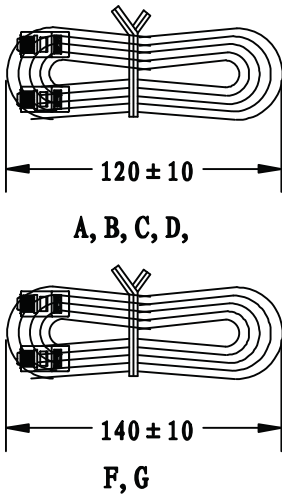

Note:

- Material: Housing-polycarbonate, clear
Terminal-0.36[.014] thick phosphor bronze.
Thick gold in localized gold plate.
Area, Gold Flash over the remainder.
Over 2.54mm[.000100] thick nickel underplate.

Part Number	Drawing Number	Wire Length "L"	Jacket Color	Cut Length
AT-S-26-8/8/B-5-R	A	1,525±20(5ft)	Black	1,525-1,535mm
AT-S-26-8/8/B-7-R	B	2,135±30(7ft)	Black	2,135-2,145mm
AT-S-26-8/8/B-10-R	C	3,050±60(10ft)	Black	3,050-3,060mm
AT-S-26-8/8/B-12-R	D	3,660±60(12ft)	Black	3,660-3,670mm
AT-S-26-8/8/B-14-R	E	4,270±60(14ft)	Black	4,270-4,280mm
AT-S-26-8/8/B-25-R	F	7,625±100(25ft)	Black	7,625-7,635mm
AT-S-26-8/8/B-50-R	G	15,250±150(50ft)	Black	15,250-15,260mm

Scale	Free					Date	Name	Title
TOLERANCE						Drawn	08.07.13	Wilson
X.	±X					Approved	08.07.13	Groll
X.X	±X							
X.XX	±X							
DIM	TOL							
X.°	±X°							
X.X°	±X°							
Angle	TOL	Id.	Modification	Date	Name	Replace		
						rev00		
						Sheet 1/1		

Unit: mm



1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@assmann.us