


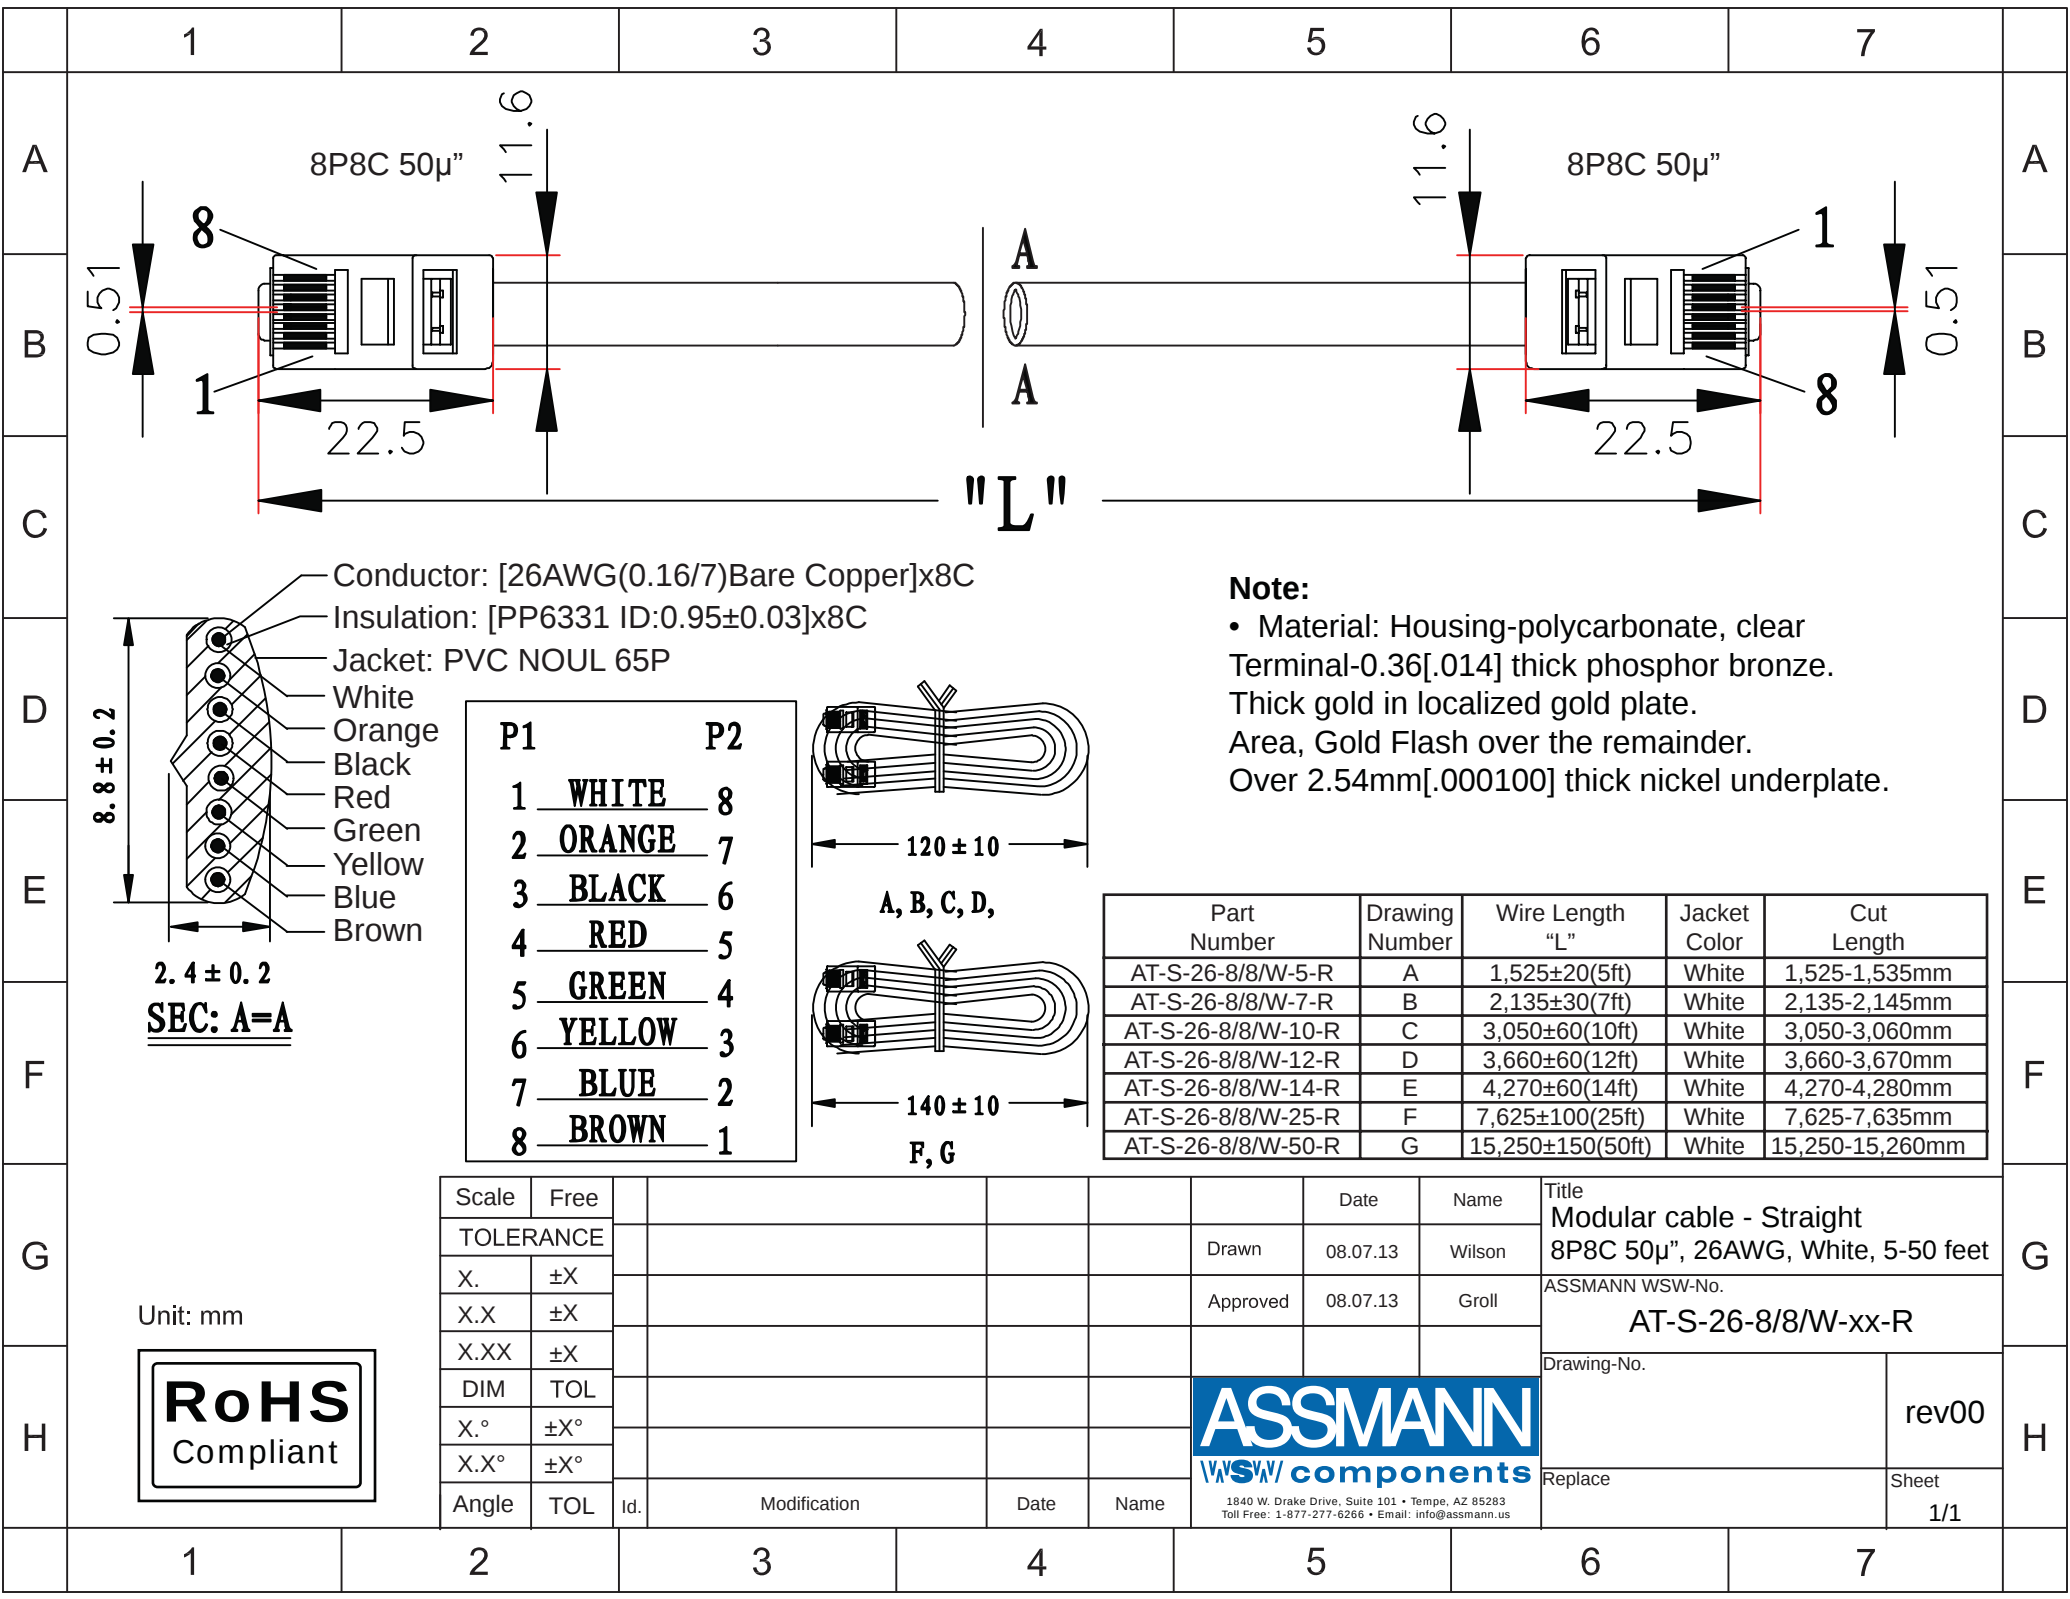

Conductor: [26AWG(0.16/7)Bare Copper]x8C

Insulation: [PP6331 ID:0.95±0.03]x8C

Jacket: PVC NOUL 65P

White
Orange
Black
Red
Green
Yellow
Blue
Brown

P1		P2	
1	WHITE	8	
2	ORANGE	7	
3	BLACK	6	
4	RED	5	
5	GREEN	4	
6	YELLOW	3	
7	BLUE	2	
8	BROWN	1	

Note:

- Material: Housing-polycarbonate, clear
Terminal-0.36[.014] thick phosphor bronze.
Thick gold in localized gold plate.
Area, Gold Flash over the remainder.
Over 2.54mm[.000100] thick nickel underplate.

Part Number	Drawing Number	Wire Length "L"	Jacket Color	Cut Length
AT-S-26-8/8/W-5-R	A	1,525±20(5ft)	White	1,525-1,535mm
AT-S-26-8/8/W-7-R	B	2,135±30(7ft)	White	2,135-2,145mm
AT-S-26-8/8/W-10-R	C	3,050±60(10ft)	White	3,050-3,060mm
AT-S-26-8/8/W-12-R	D	3,660±60(12ft)	White	3,660-3,670mm
AT-S-26-8/8/W-14-R	E	4,270±60(14ft)	White	4,270-4,280mm
AT-S-26-8/8/W-25-R	F	7,625±100(25ft)	White	7,625-7,635mm
AT-S-26-8/8/W-50-R	G	15,250±150(50ft)	White	15,250-15,260mm

Unit: mm



Scale	Free						Date	Name	Title
TOLERANCE						Drawn	08.07.13	Wilson	Modular cable - Straight 8P8C 50µ", 26AWG, White, 5-50 feet
X.	±X					Approved	08.07.13	Groll	ASSMANN WSW-No.
X.X	±X								AT-S-26-8/8/W-xx-R
X.XX	±X								Drawing-No.
DIM	TOL								rev00
X.°	±X°								
X.X°	±X°								
Angle	TOL	Id.	Modification	Date	Name	ASSMANN WSW components 1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us			

Replace	Sheet 1/1
---------	--------------