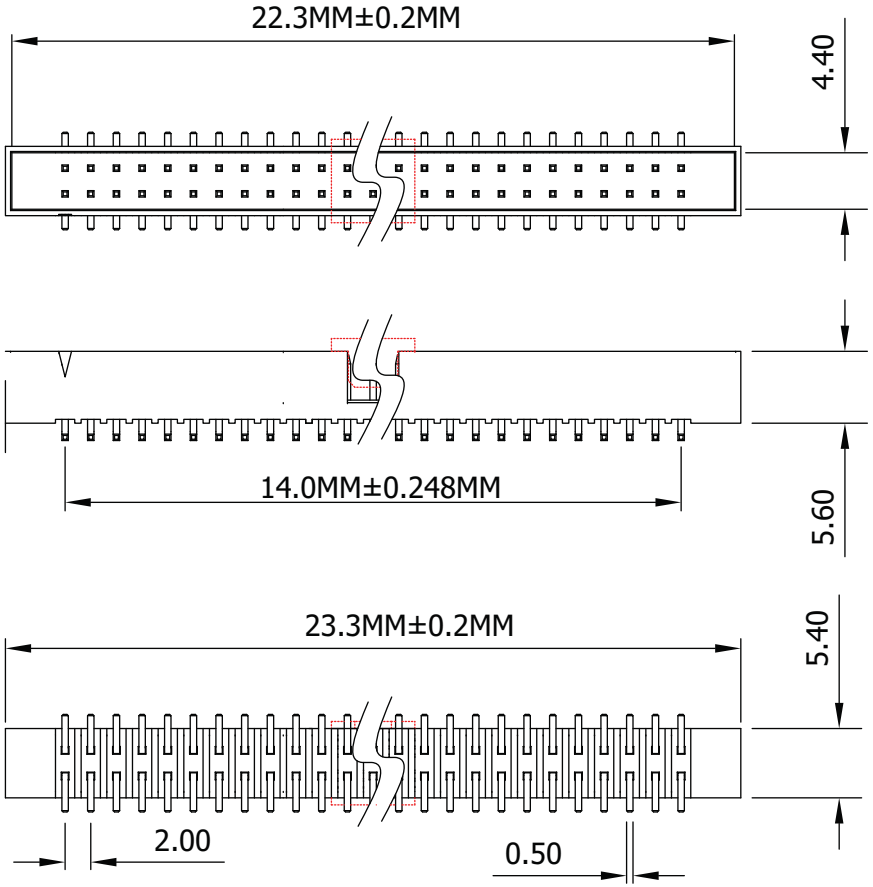

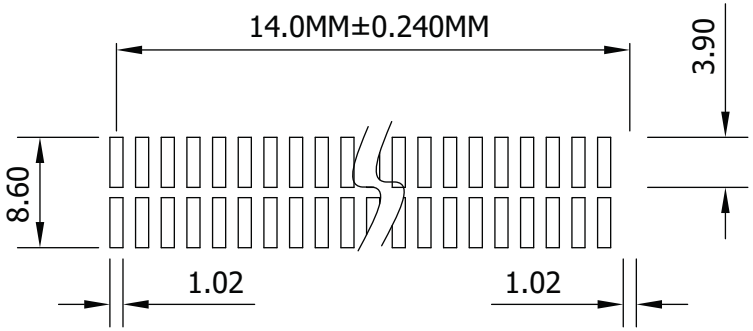

Recommended P.C.B. Layout



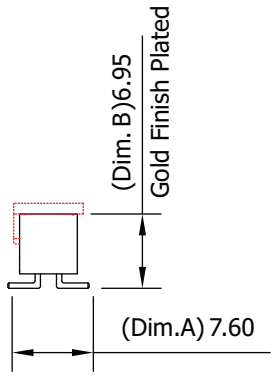

Material:

- Current Rating: 1 Amp
- Insulator Resistance: 5,000MΩ Min.
- Dielectric Withstanding: 500V AC
- Operating Temperature: -40°C ~ +85°C
- Max Processing Temperature: 230°C for 60 Seconds
- Max Processing Temperature: 260°C for 10 Seconds
- Contact Material: Copper Alloy
- Insulator Material: Polyester, UL 94V-0
  Standard: PA6T

Unit: MM±0.25MM

RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	10.28.11	Chappell
Approved		

ASSMANN WSW components

Item No. **AWHW2-16G-SMD-R**

Title IDC Box Header, SMD - 2.0MM Pitch, 16 Contacts

Drawing No.

rev00

Replace

Sheet