



Scale	1:1							Name
TOLERANCE						Drawn	10.28.11	Chappel
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

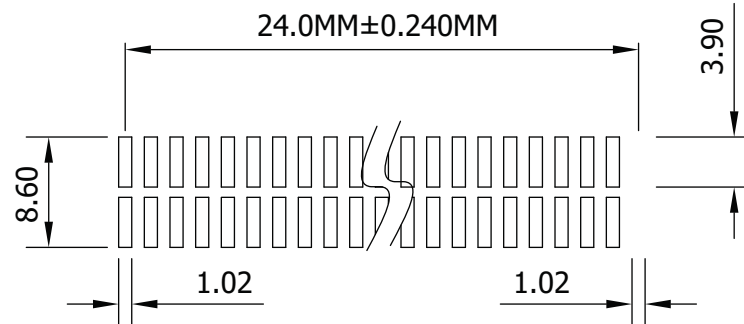

Recommended P.C.B. Layout



Material:

- Current Rating: 1 Amp
- Insulator Resistance: 5,000MΩ Min.
- Dielectric Withstanding: 500V AC
- Operating Temperature: -40°C ~ +85°C
- Max Processing Temperature: 230°C for 60 Seconds
- Max Processing Temperature: 260°C for 10 Seconds
- Contact Material: Copper Alloy
- Insulator Material: Polyester, UL 94V-0

Standard: PA6T

Unit: MM±0.25MM

Item No.	
AWHW2-26G-SMD-R	
Title IDC Box Header, SMD - 2.0MM Pitch, 26 Contacts	
Drawing No.	rev00
Replace	Sheet