

A

B

C

D







E

F

G

H

I.D.C. Socket Dual-Row, No SR

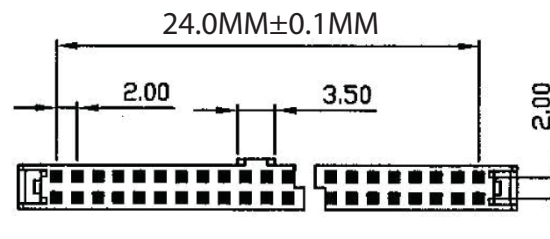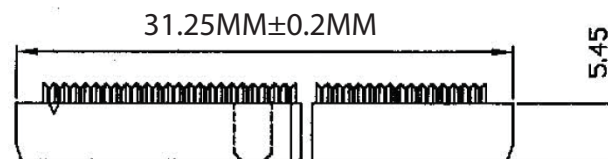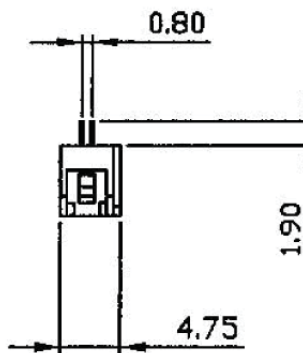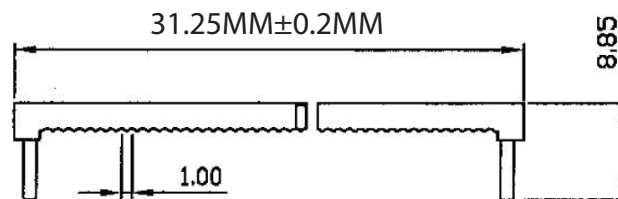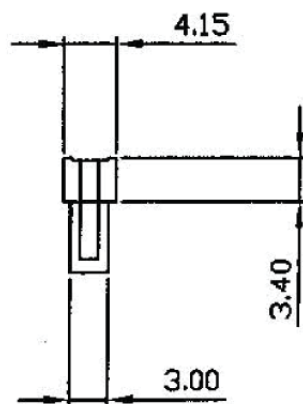

Materials:

- Insulator: P.B.T. 30% Glass Fiber, UL94V-0
- Contact Material: Phosphor Bronze
- Gold Flash over Nickel

Electrical:

- Current Rating: 1 Amp
- Insulation Resistance: 1,000MΩ Min.
- Dielectric Withstanding, 500V AC
- Operating Temperature: -55°C ~ +105°C

Unit: MM±0.3MM

Scale	1:1							Name
TOLERANCE						Drawn	10.19.11	Chappel
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°					 		
			Modification	Date	Name			

Item No.	
AWP2-26-7240-T-R	
Title IDC-Socket, Pitch 2.0MM, 26 Contacts Central Socket Lug w/o Strain Relief, Gold Flash	
Drawing No.	rev00
Replace	Sheet

