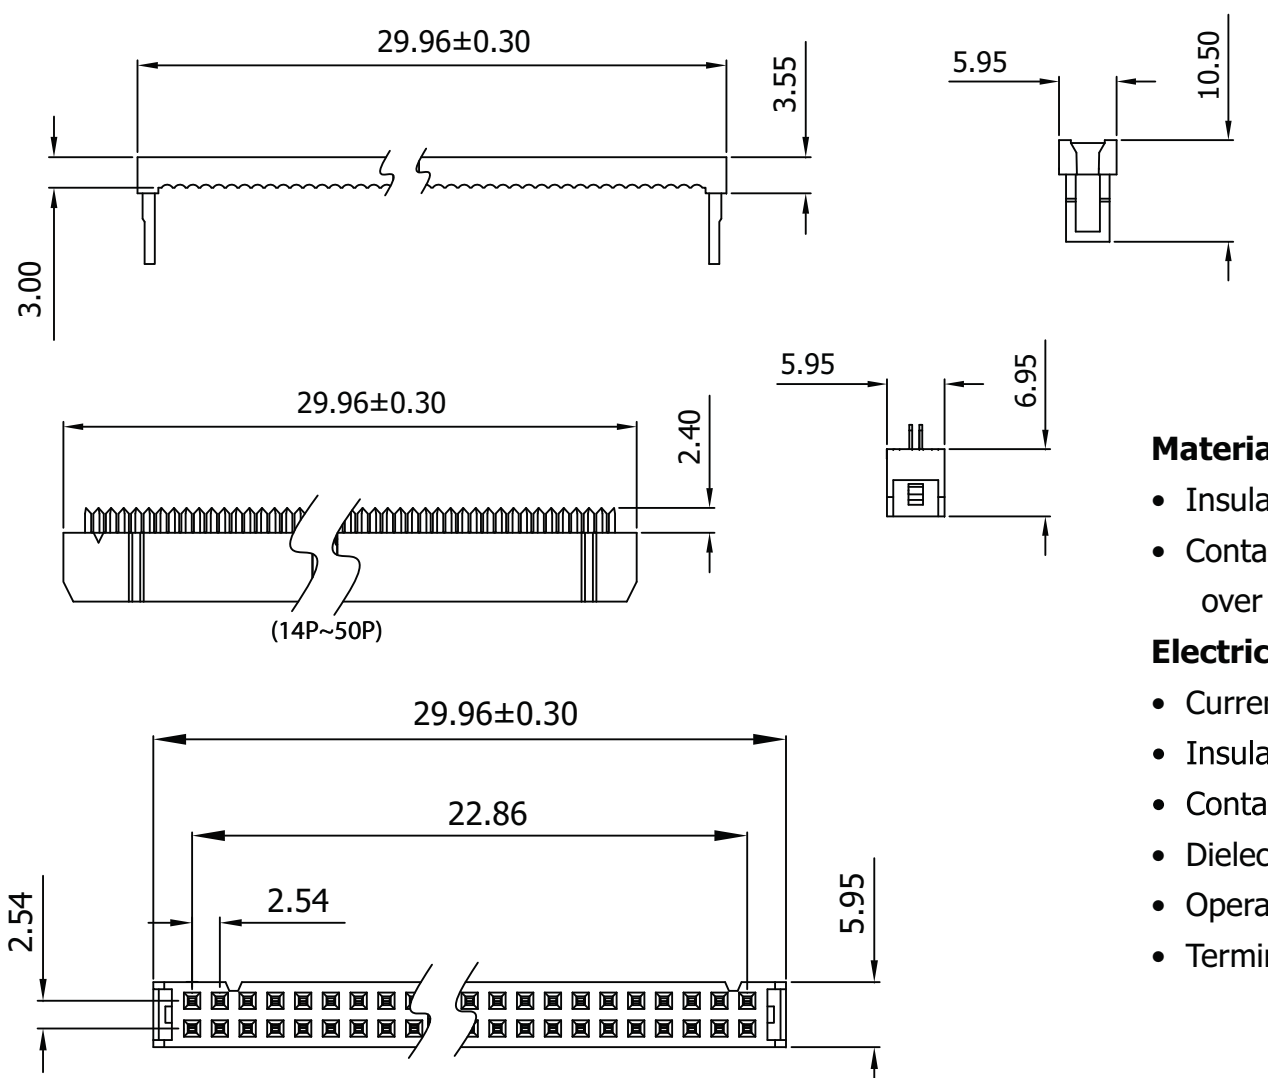


	1	2	3	4	5	6	7																								
A	 Material: - Insulator: P.B.T. 30% Glass Fiber, UL 94V-0 - Contact Material: Phosphor Bronze, Tin plated over Nickel Electrical: - Current Rating: 1Amp DC - Insulation Resistance: 3,000MΩ Min. - Contact Resistance: 30MΩ Max. - Dielectric Withstanding: 500V AC - Operating Temperature: -40°C ~ +105°C - Terminated with 1.27MM pitch flat ribbon cable. DIMENSION							A																							
B								B																							
C								C																							
D								D																							
E								E																							
F								F																							
G	Scale 1:1 TOLERANCE <table><tr><td>X.X</td><td>±0.40</td></tr><tr><td>X.XX</td><td>±0.25</td></tr><tr><td>X.XXX</td><td>±0.15</td></tr><tr><td>Angle</td><td>±3°</td></tr></table> RoHS Complaint ASSMANN components <table><tr><td>Modification</td><td>Date</td><td>Name</td></tr></table> <table><tr><td>Item No.</td><td colspan="2">AWP20-8540-T-R</td></tr><tr><td>Title</td><td colspan="2">IDC-Socket - 2.54MM Pitch, Tin Plated, w/o Central Lug, w/o Strain Relief, 20 Contacts</td></tr><tr><td>Drawing No.</td><td></td><td>rev00</td></tr><tr><td>Replace</td><td></td><td>Sheet</td></tr></table> Unit: MM±0.20MM							X.X	±0.40	X.XX	±0.25	X.XXX	±0.15	Angle	±3°	Modification	Date	Name	Item No.	AWP20-8540-T-R		Title	IDC-Socket - 2.54MM Pitch, Tin Plated, w/o Central Lug, w/o Strain Relief, 20 Contacts		Drawing No.		rev00	Replace		Sheet	G
X.X	±0.40																														
X.XX	±0.25																														
X.XXX	±0.15																														
Angle	±3°																														
Modification	Date	Name																													
Item No.	AWP20-8540-T-R																														
Title	IDC-Socket - 2.54MM Pitch, Tin Plated, w/o Central Lug, w/o Strain Relief, 20 Contacts																														
Drawing No.		rev00																													
Replace		Sheet																													
H								H																							
	1	2	3	4	5	6	7																								